

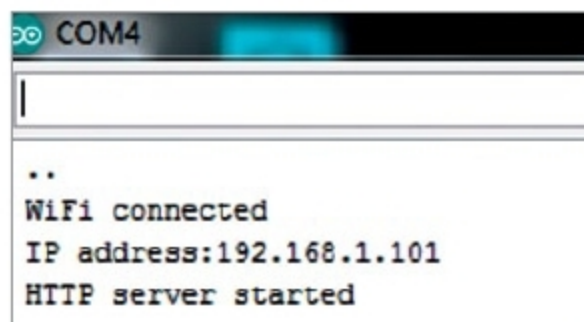


Fig. 3: IP address allocated to WeMos D1 board



Fig. 4: Readings of float voltage at pin A0 and last reset value

by your network, as shown in Fig. 3. (Note: IP address in your case will be different.)

If you are not getting the IP address in Serial Monitor, ensure that baud rate is 115200. Then, open the Web browser (client) and type the IP address of WeMos D1 board.

Once you have entered the IP address in the Web browser, it will request for the contents of that page in HTML format. WeMos D1 board as a server will respond with the contents of the page (which will have float voltage value captured from pin A0). You will be able to view the float voltage of pin A0 and millis values, as shown in Fig. 4.

Millis value is the time in milliseconds since WeMos D1 board's last reset. A0 and millis values are updated every three seconds. You can change this refresh rate by changing number 3 in the following line in the source code:

```
message += "<meta http-equiv= 'refresh'
content='3'>";
```

You can also connect an analogue sensor, such as temperature sensor LM35, with WeMos board and check the value of A0. The procedure and IP address will be the same as above. After entering the IP address in the browser, as mentioned above, you will get the value of A0, which will vary with the ambient temperature. For example, at room temperature, A0



reading will be around 96. If you raise the temperature by heating the sensor, A0 reading will also increase. This way you can monitor temperature of the sensor and device reset status from the Web browser.

The formula for converting analogue signal at pin A0 of WeMos D1 board into voltage is:

Voltage = $(3.3 \times \text{analogue read (A0)}) / 1024$ **EFY**



D. Citharthan is assistant professor at Christ the King Engineering College, Coimbatore, Tamil Nadu



S. Sathish Kumar Selvaraj is founder of SJK Technologies Pvt Ltd, New Delhi



THE BEST CONNECTOR SYSTEMS FOR HOME APPLIANCES, AUTOMOTIVES AND HVAC

Customers India

- BOSCH
- IDEAL BOILERS
- LEONI
- VARROC
- BAJAJ
- DAIMLER
- BENZ
- DHOOT

STOCKO CONTACT GmbH is a World Leading Manufacturer of crimp terminals, Insulation Displacement Connectors and Lighting systems in Automotive, White Goods and HVAC Industries. Stocko has an IN HOUSE Machine Design and Development Centre where Hand Operated to Fully Automatic Machines are built. This increases Efficiency and Reliability on Stocko Parts Worldwide. In India, several OEM's and Harness Makers use Stocko parts for their versatile applications ranging from Automotive to HVAC to Home Appliances markets.

- Wide range of Crimp Terminals, Tabs and Pins
- Multiple IDC Connector Systems from 2.5mm to 5MM
- IDC – Connectors, Machines and Tools • German Design, Precision and Quality
- Over 7.5 Million Connectors Sold in 2017-18



MADE IN GERMANY

Applications

- Stoves
- Lighting Systems
- Air Conditioners
- Refrigerators
- Washing Machine
- HVAC Industry

www.stocko-contact.com










**AURO
CONTROLS
PRIVATE LIMITED**
ISO 9001:2008 COMPANY
PUNE, INDIA

Florina Apts., 6th Floor, S.No. 2/1/7 Erandwane, Off. Karve Road,
Pune 411 004. India. Tel.: 020-25465915, Nachiket: +91-8600182797

AUTHORIZED DISTRIBUTORS IN INDIA, SRI LANKA AND UAE

www.aurocontrols.com