

Fig. 9: LED_ON and LED_OFF

Arrangement and drag it over VerticalArrangement. Go to Properties of HorizontalArrangement2 and change the following.

- Align: horizontal - centre
- Height: 50 pixels
- Width: fill parent

Select Palette→User Interface→Label and drag it over HorizontalArrangement2. Label it to show the status of the Bluetooth connection, as connected or not. Go to Properties of Label2 and make the following changes:

- Background colour: orange
- Font size: 19
- Height: 40 pixels
- Width: fill parent
- Text: Not Connected
- Text alignment: centre

Third horizontal arrangement.

Go to Palette→Layout→HorizontalArrangement layout and drag it over the vertical layout. Go to Properties and select Align Horizontal as Center, Height as 50 pixels and Width as Fill Parent.

Select Palette→User Interface→Button and drag it over HorizontalArrangement3. Go to Properties of Button and change the following:

- Background colour: green
- Font size: 19.0
- Height: 50 pixels
- Width: 50 per cent
- Text: LED_ON
- Text alignment: centre

Third horizontal arrangement. Go to Components, select button_1 and click on Rename. Change its name to LED_ON. Select Palette→User Interface→Button and drag it over HorizontalArrangement3. Go to Properties of Button and make the following changes:

- Background colour: red
- Font size: 19.0
- Height: 50 pixels
- Width: 50 per cent
- Text: LED_OFF
- Text alignment: centre

Go to Components, select button_2 and click on Rename. Change its name to LED_OFF.

Fourth horizontal arrangement. Select Palette→Layout→HorizontalArrangement and drag it over the vertical layout. Go to Properties of HorizontalArrangement4 and make the following changes:

- Height: 80 pixels
- Width: fill parent

Text Box. This is used to receive data from the connected device. Reception of data is implemented using a timer. The client checks to see if data is available. If yes, it reads and displays the data on the fourth horizontal arrangement. For this, add Clock Sensor component later,

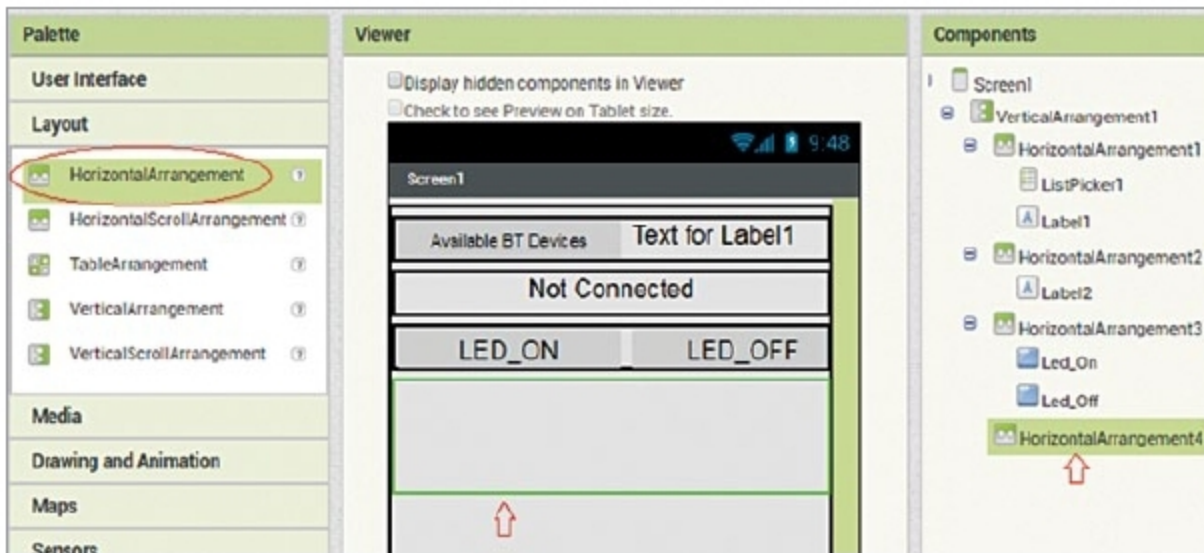


Fig. 10: Fourth horizontal arrangement



Fig. 11: Adding disconnect button

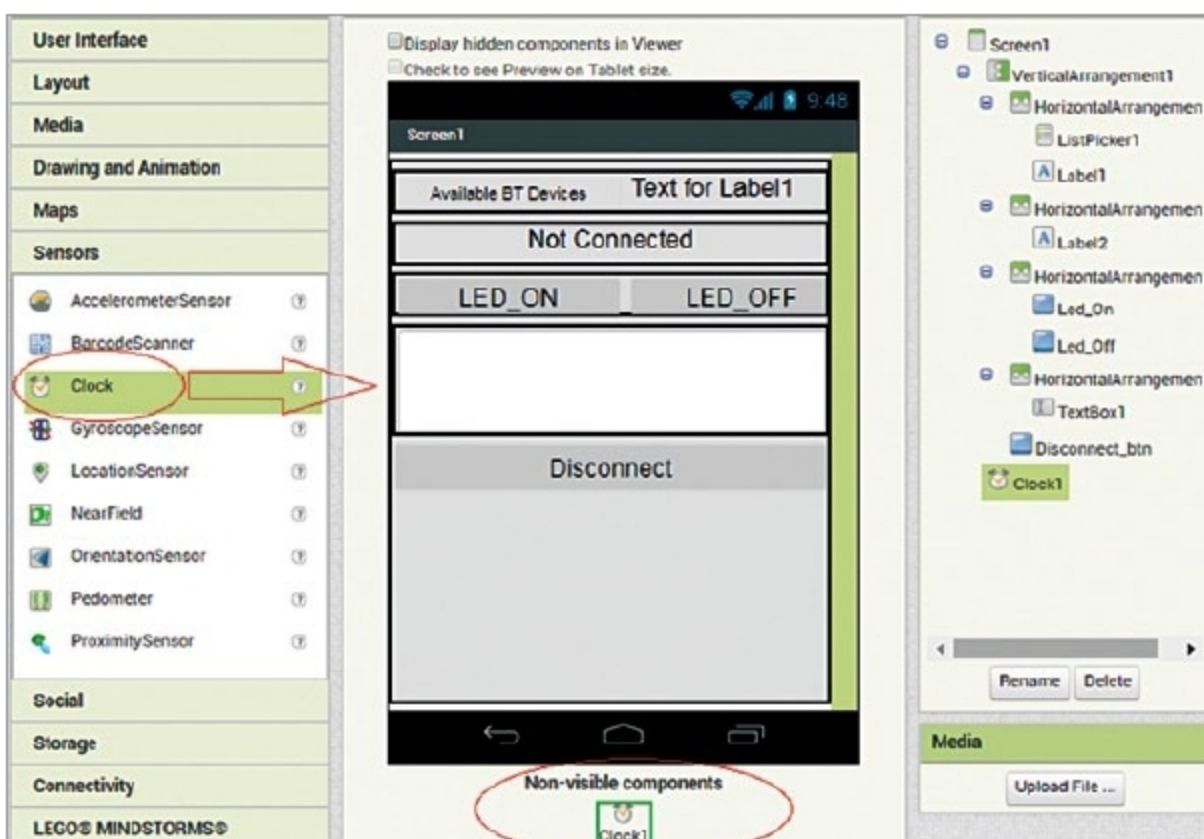


Fig. 12: Adding non-visible component