

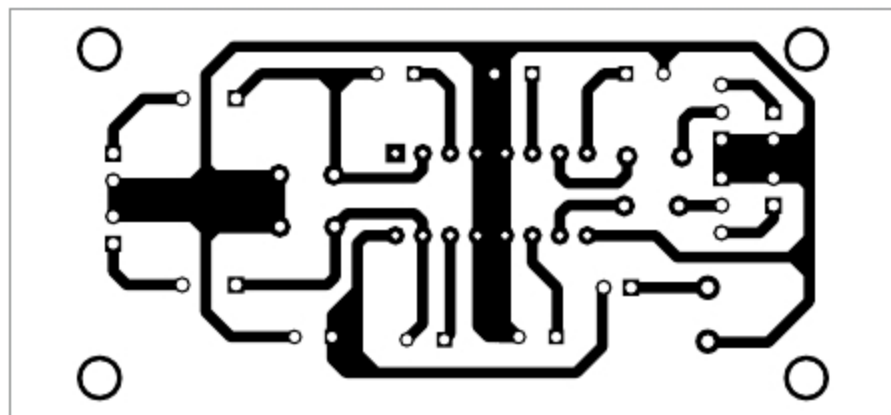


Fig. 3: Actual-size PCB layout of 5W stereo audio amplifier

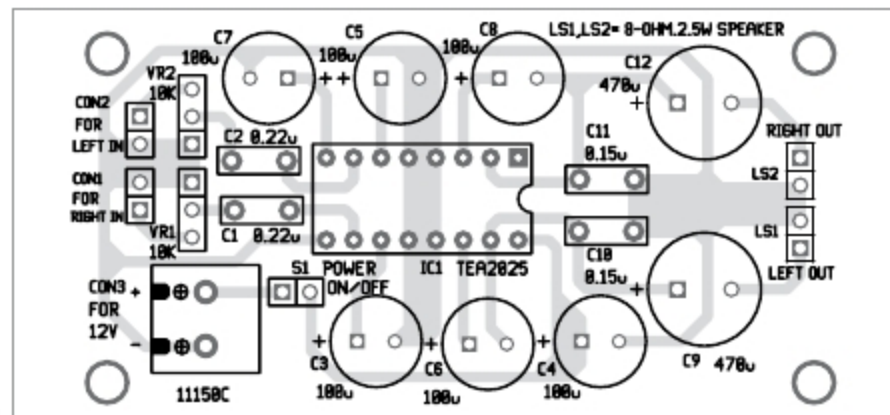


Fig. 4: Components layout for the PCB

Fig. 3 and its components layout in Fig. 4. Assemble the circuit on the PCB and solder 16-pin IC socket for IC1 on it. Connect 12V DC across CON3. Connect audio left input across CON1 and right input across CON2 from an audio source like a PC, laptop or cellphone.

Alternatively, you can use veroboard of size 5cm x 7cm to build this amplifier.

Place all passive components like electrolytic and ceramic capacitors as given in the circuit diagram and solder these on the PCB. VR1 and VR2 are connected to inputs (right and left)

of the amplifier on the PCB.

Calibration and adjustments

Connect a 12V DC or battery to the amplifier. Take two loudspeakers (8-ohm, 2.5W) and connect these at LS1 and LS2, as shown in Fig. 4. Now, turn the wipers of both the potentiometers (10-kilo-ohm) to middle position.

Take a metal screwdriver and gently touch at left input. You will hear a humming sound coming from the left speaker, which means that the left channel of TEA 2025 is working. Similarly, touch the right input terminal and you should hear a humming

sound coming from the right speaker.

You can also use a signal generator to calibrate the prototype. Simply connect output (say, 1kHz) of the signal generator to left and right inputs of the amplifier. You will hear a loud audio tone coming from the loudspeakers, which means the amplifier is working well. Adjust volume controls (VR1 and VR2) as per taste and requirement. **EFY**



Raj K. Gorkhali is an electronics hobbyist



THE BEST CONNECTOR SYSTEMS FOR HOME APPLIANCES, AUTOMOTIVES AND HVAC

Customers India

- BOSCH
- IDEAL BOILERS
- LEONI
- VARROC
- BAJAJ
- DAIMLER
- BENZ
- DHOOT

STOCKO CONTACT GmbH is a World Leading Manufacturer of crimp terminals, Insulation Displacement Connectors and Lighting systems in Automotive, White Goods and HVAC Industries. Stocko has an IN HOUSE Machine Design and Development Centre where Hand Operated to Fully Automatic Machines are built. This increases Efficiency and Reliability on Stocko Parts Worldwide. In India, several OEM's and Harness Makers use Stocko parts for their versatile applications ranging from Automotive to HVAC to Home Appliances markets.

- Wide range of Crimp Terminals, Tabs and Pins
- Multiple IDC Connector Systems from 2.5mm to 5MM
- IDC – Connectors, Machines and Tools • German Design, Precision and Quality
- Over 7.5 Million Connectors Sold in 2017-18



MADE IN GERMANY

Applications

- Stoves
- Lighting Systems
- Air Conditioners
- Refrigerators
- Washing Machine
- HVAC Industry

www.stocko-contact.com



AURO
CONTROLS
PRIVATE LIMITED
ISO 9001:2008 COMPANY
PUNE, INDIA



Florina Apts., 6th Floor, S.No. 2/1/7 Erandwane, Off. Karve Road,
Pune 411 004. India. Tel.: 020-25465915, Nachiket: +91-8600182797

AUTHORIZED DISTRIBUTORS IN INDIA, SRI LANKA AND UAE

www.aurocontrols.com