

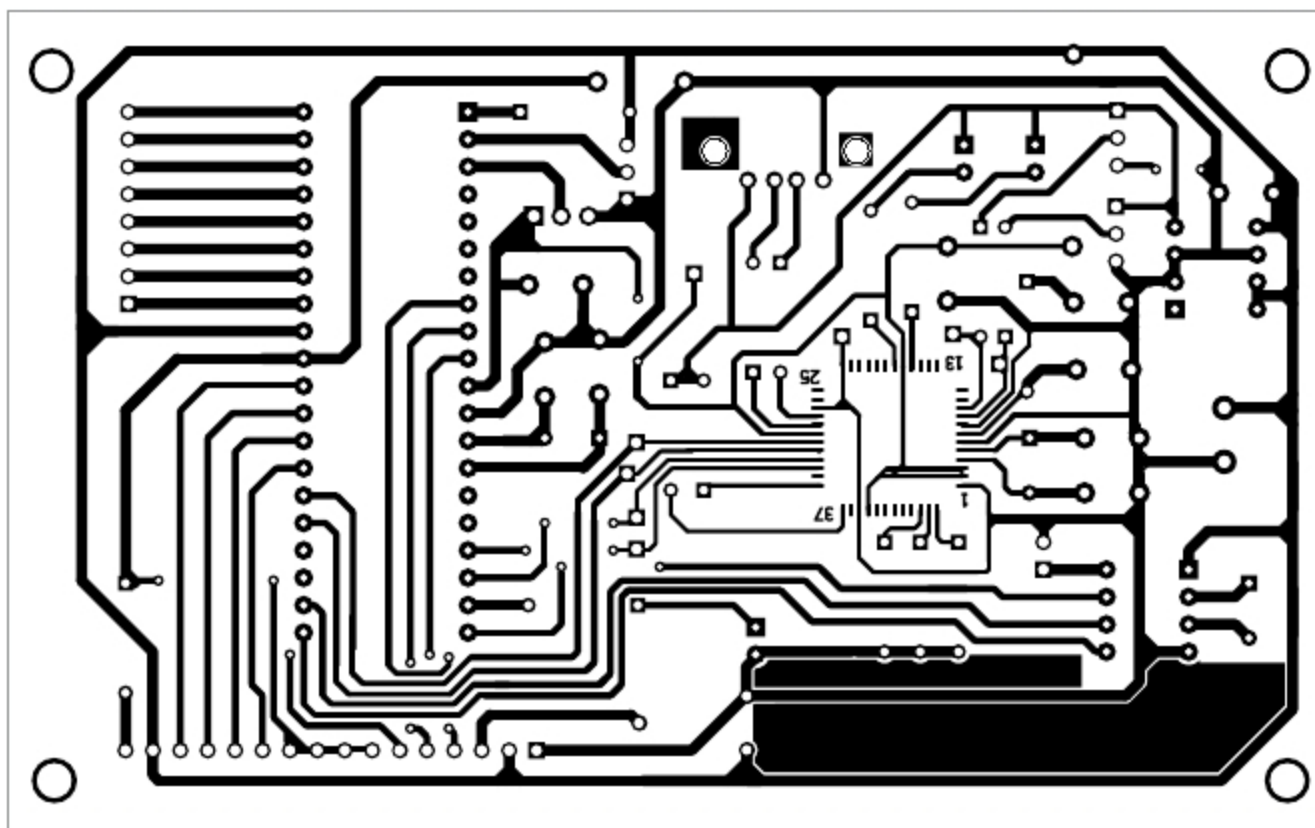


Fig. 4: Actual-size PCB layout of the real-time USB data logger

tion of less than $1\mu W$.

CCS C Compiler provides the driver for real-time clock DS1302 and 4x4 keyboard. Also, the MCU has inbuilt pull-up resistors for Port B pins, which can be enabled using software commands. Hence, connection between the

MCU's Port B pins and the keyboard is given directly. It has the provision to set time range like minute, hour, date and day so that data can be recorded continuously for an entire day, if sufficient power is provided. Time settings can be monitored on LCD1.

Construction and testing

An actual-size PCB layout for the hand-held data logger is shown in Fig. 4 and its components layout in Fig. 5. Assemble the circuit on the PCB.

Once PCB assembly is complete, burn DataLogger.hex hex code into PIC18F452 using a suitable programmer. After programming, remove it from the programmer and insert it into the PCB. Your circuit is now ready to use.

Insert a pen drive in connector CON2. Connect 5V DC across CON1 to power up the circuit. LED1 and LED2 will flash for two seconds alternatively until a pen drive is connected. Temperature sensor LM35 will automatically sense the surrounding temperature. Glowing of LED3 connected to pin 19 of PIC18F452 shows that temperature data measurement is in progress.

A 10-kilo-ohm potmeter (VR1) connected to pin 2 of PIC18F452 sets a pre-defined reading (say, 2V). That is, two readings are taken and sent to

Most Trusted[#] Electronics Industry Directory

Up For Grabs!!

- 10,000+ Electronics Organisations
- 2,800+ Product Categories For Buyers
- Key Government Organisations Related to Electronics
- Key Industry Associations Related to Electronics

Verified Data



50% OFF

Only ₹1000
₹500

ORDER FORM

Name _____ Organisation _____

Mailing Address _____ City _____

Pin Code _____ State _____ Phone No. _____ Email _____

Please find enclosed a sum of Rs _____ by DD/MO/crossed cheque bearing the No. _____ drawn on (bank) _____ in favour of **EFY Enterprises Pvt Ltd**, payable at Delhi *(Please add Rs 50 for non-metro cheques)* **OR Pay online at: <http://payment.efyindia.com>**

Fill in the photocopy of this form and send it to: **EFY Enterprises Pvt Ltd**, D-87/1 Okhla Industrial Area, Phase 1, New Delhi 110 020 Ph: 011-40596600 or E-mail: support@efy.in