


Astronomical Telescopes and Instruments 2020: Exercises on Telescopes (Due on 13 October 2020 at 14:15)

C.U.Keller

October 5, 2020

1 Maksutov Corrector

A corrector plate in front of a spherical primary mirror makes a telescope with a very large field of view. One implementation is the aspherical corrector plate used in a Schmidt telescope. Another version, the Maksutov design, has a spherical meniscus lens corrector in front of the spherical primary mirror. In this exercise, you will go through the steps of designing a Maksutov telescope, analyzing its performance and then comparing it to single-mirror telescopes without a transmitting corrector. **Make sure to include all numerical values necessary to recreate your TOD design.**

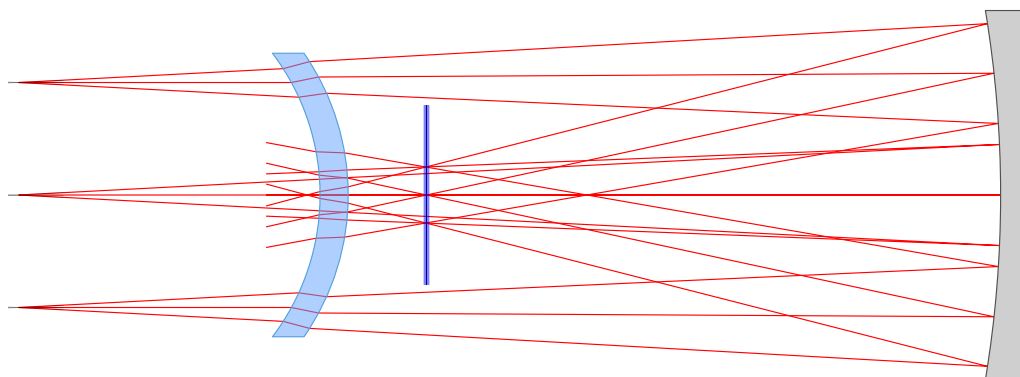

1. The Maksutov corrector is an achromatic, single lens. Use the expression for the focal length of a thick lens and require that the focal length is invariant under a change of the index of refraction, i.e. $\partial f / \partial n = 0$. Derive the relation between the two radii of curvature, $R_{1,2}$ and the thickness d for an achromatic meniscus lens. The radii of curvature of a meniscus lens have the same sign.
2. The thickness and radii of curvature of the corrector can be further optimized to compensate for the spherical aberration of the primary mirror. Assume that the corrector is made from fused silica ($n=1.46$ at 550 nm). If the primary, spherical mirror has a radius of curvature R and the telescope has an f-number of 2.5, choose the thickness of the corrector as $d = 0.025|R|$ and $R_1 = 0.2087R$ to compensate the primary's spherical aberration. Calculate R_2 using the equation derived above.
3. Place the corrector at a distance of $0.2667|R|$ behind the entrance aperture and the mirror at $0.8543|R|$ behind the aperture to minimize the aberrations of the complete system. Determine the performance (rms spot size) of the Maksutov design for an on-axis field and an off-axis field at 3 degrees.
4. Compare these performance parameters to a single spherical mirror and a Newtonian telescope with the same f-number and focal length.

2 Ritchie-Chretien Telescope

A Cassegrain telescope consists of a parabolic primary and a hyperbolic secondary mirror, which perfectly reimages the on-axis focus of the primary mirror to a location behind the primary mirror. Such a two-mirror telescope has no spherical aberration, but it suffers from coma. The Ritchie-Chretien telescope is a modified Cassegrain telescope design where the off-axis coma of the primary mirror is corrected by making the primary mirror slightly hyperbolic and the conic constant of the secondary mirror is adjusted such that spherical aberration is still cancelled. **Make sure to include all numerical values necessary to recreate your TOD design.**

1. Design a Ritchie-Chretien telescope with a primary mirror diameter of 81.15 mm and a focal length of 144.875 mm and a secondary mirror with a diameter of 11.078 mm and a focal length of 22.669 mm. Determine the conic constants, the separation between the two mirrors, and the back-focal distance using the equations shown in the lecture and provide an image of the design. Hints: use a source beam of 80mm diameter and aim it at the primary mirror.
2. Show that your design is free of aberrations on-axis and determine the performance for a field angle of 0.5 degrees. What is the major aberration at 0.5 degrees? Hint: increase the diameter of the secondary mirror so that there is no vignetting at a field angle of 0.5 degrees.
3. Assess the performance that would be achieved with this telescope if a curved image plane would be used. What is the radius of curvature of the image and what is the rms spot diameter at a field angle of 0.5 degrees? Hint: You can change the radius of curvature of the image to a finite value; reduce the image diameter as much as possible.
4. What is the remaining aberration? Hint: move the image to either side of the best focus position.