

DO-IT-YOURSELF

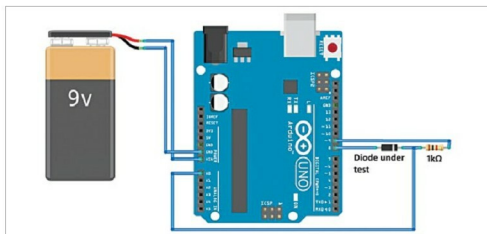


Fig. 4: Circuit diagram of the diode tester

Copy the entire contents of the extracted ArduinoIO folder to a folder in My Documents (for Windows PC).

Our GUI application program has been developed in R2014a version of MATLAB. After installing this version of MATLAB in your PC, open install_arduino.m file present in ArduinoIO folder. Now run install_arduino.m file. This code will correctly install and save the path of Arduino support package.

Open the source code file for this project titled diode_test.m. Edit the line `a = arduino('COM19')`, substituting 19 with the COM port number in your PC where Arduino Uno board has been installed. Select Connect on the GUI to connect Arduino with MATLAB. After successful connection, connect the diode (in this case, 1N4007) properly, as shown in Fig. 4. Click on Test. If the diode

EFY Note

The source code of this project is included in this month's EFY DVD and is also available for free download at source.efymag.com

is in good condition, it will display 'Diode is OK.' If it is faulty, it will display the type of fault, which is either short-circuited diode or open-circuited diode, on the GUI screen. Click on Disconnect to terminate the test session. **EFY**

Shibendu Mahata is M.Tech (gold medalist) in instrumentation and electronics engineering from Jadavpur University. Currently, he is pursuing Ph.D from NIT, Durgapur. He is interested in MCU based real-time embedded signal processing and process control systems



Saikat Patra is passionate about electronics and MCU based embedded system applications




MG Super Labs

Quality Products
Supplemented with good documentation and code



MG Automation Technologies

Widest Range of Sensors
Custom Sourcing
Fast Shipping
Use Coupon EFYS on your next order for an amazing offer!

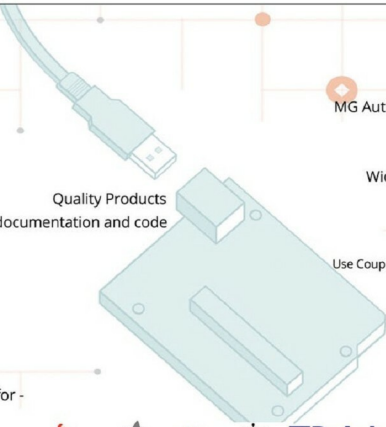

Authorised Distributors for -












www.mgsuperlabs.co.in
 queries@mgat.co.in
 0712-2424862
+91-7721933328