

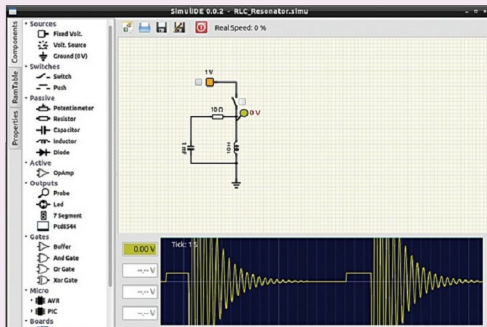


Fig. 2: An RLC circuit in action, along with the output waveform

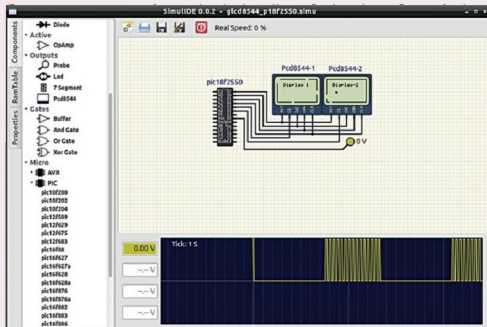


Fig. 3: Choosing your PIC version

the circuit. Take a look at the three available categories.

**Components.** The components section lists out all available com-

ponents for you to choose from. You just have to drag and drop each component and connect these together by wires, which are auto-

matically laid out when you draw a line with the mouse. Components are grouped together like voltage, current, clock and ground; switch category that provides a switch or a push button; passive components like resistors, diodes, capacitors, inductors and potentiometer; and active components like op-amps.

You can connect probes, LEDs, etc and view the output of your circuit according to your requirement. Buffers and logic gates like AND, OR and XOR are available to connect anywhere in the circuit. The readily-available AVR or Arduino microcontrollers or 74HC series ICs also need no prior setup, and can simply be added and connected directly in the circuit.

**RAM table.** This section comes in handy while working with microcontrollers. Once the firmware is loaded in, you can observe this section to observe data flow between internal registers. As shown in Fig. 4, you can see that RAM Table window displays the details of the various registers along with their location addresses, designated names and current values in decimal and binary number systems.

**Properties.** Coming to actually creating your circuit, properties of every component can be viewed, set or modified easily. On clicking on a component, all its related parameters can be edited from Properties window.

For reactive components, the step length can be varied by changing ReactStep value. The longer this value, the faster the element will simulate; but keep in mind

THE COMPLETE MAGAZINE ON OPEN SOURCE

# OpenSource

ForYou

Your favourite Magazine on  
Open Source is now on the Web, too.

## OpenSourceForU.com

Follow us on Twitter@LinuxForYou