Name..... ID No. ..... Seat No.....

มหาวิทยาลัยเทคโนโลยีพระจอมเกล้าธนบุรี

มหาวิทยาลัยเทคโนโลยีพระจอมเกล้าธนบุรี
การสอบกลางภาคเรียนที่ 1 ปีการศึกษา 2553

วิชา MEE 223 Thermodynamics **นศ.ภาควิชาไฟฟ้าปีที่ 4**

วันจันทร์ที่ 2 ธันวาคม พ.ศ.2556 **เวลา 13.00 – 16.00 น.**

คำเตือน

1. ข้อสอบทั้งหมดมี 4 จำนวน 12 หน้า (รวมใบปะหน้าด้วย)
2. อนุญาตให้นำเครื่องคำนวณตามที่มหาวิทยาลัยฯ กำหนด เข้าห้องสอบได้
3. ไม่อนุญาตให้นำตำราเข้าห้องสอบ
4. ให้เขียนชื่อและรหัสประจำตัว ทุกแผ่น
5. ทำข้อสอบในกระดาษข้อสอบ

เมื่อนักศึกษาทำข้อสอบเสร็จ ต้องยกมือบอกกรรมการคุมสอบ
เพื่อขออนุญาตออกนอกห้องสอบ
ห้ามนักศึกษานำข้อสอบออกนอกห้องสอบ

นักศึกษาซึ่งทุจริตในการสอบ อาจถูกพิจารณาโทษสูงสุดให้พ้นสภาพการเป็นนักศึกษา

รศ.สุรชัย บวรเศรษฐนันท์
(ผู้ออกข้อสอบ)
โทร 0-2470-9123-4

Name..... ID No. ..... Seat No.....

1 Answer the following question

1.1 What are the assumptions in analysis the Thermodynamics Power Cycle?

1.2 Draw the P-v and T-s diagram of the following cycle and also specify the process that construct the cycle.

Carnot Cycle

Otto Cycle

Name..... ID No..... Seat No.....

Diesel Cycle

Brayton Cycle

1.3 Draw the schematic diagram and P-h diagram for a vapor compression refrigeration cycle.

1.4 Explain the meaning of " TON refrigeration "

Name..... ID No. .....Seat No.....

1.5 Explain the difference of C.O.P. and E.E.R.

1.6 What is the meaning of saturated air in Psychrometry?

1.7 What is the difference of wet bulb temperature and dew point temperature?

1.8 What is the difference of humidity ratio and relative humidity?

1.9 Fill the data of humid air from Psychometrics Chart into the blank:-

	Dry bulb °C	Wet bulb °C	%RH	Dew pt. °C	Sp. Humidity	Enthalpy
A	35	30				
B	26		50			
C	35			26		
D		30		26		
E			60	26		

Name..... ID No. ..... Seat No.....

2 A refrigerator uses refrigerant-134a as the working fluid and operates on ideal vapor compression refrigeration cycle as following:

Condensing pressure	1.5	MPa(abs.)
Evaporating pressure	0.4	MPa(abs.)
Degree of superheated	0	degree
Degree of sub-cooled	0	degree

Determine;

Temperature	@inlet of the compressor	.....°C
	@inlet of the condenser	.....°C
	@inlet of the expansion	.....°C
	@inlet of the evaporator	.....°C
Enthalpy	@inlet of the compressor	.....kJ/kg
	@inlet of the condenser	.....kJ/kg
	@inlet of the expansion	.....kJ/kg
	@inlet of the evaporator	.....kJ/kg
	Refrigerating Effect	.....kJ/kg
	Condensing Effect	.....kJ/kg
	Compression Work	.....kJ/kg
	C.O.P. of Refrigeration	.....

Show the state and processes of the refrigeration cycle on the given P-h Chart of R-134a

If the cooling capacity is 2 tons (1 ton of refrigeration=3.516 kW) .What is the mass flow rate of the refrigerant in the system ?

Name..... ID No. .....Seat No.....

มหาวิทยาลัยเทคโนโลยีพระจอมเกล้า...

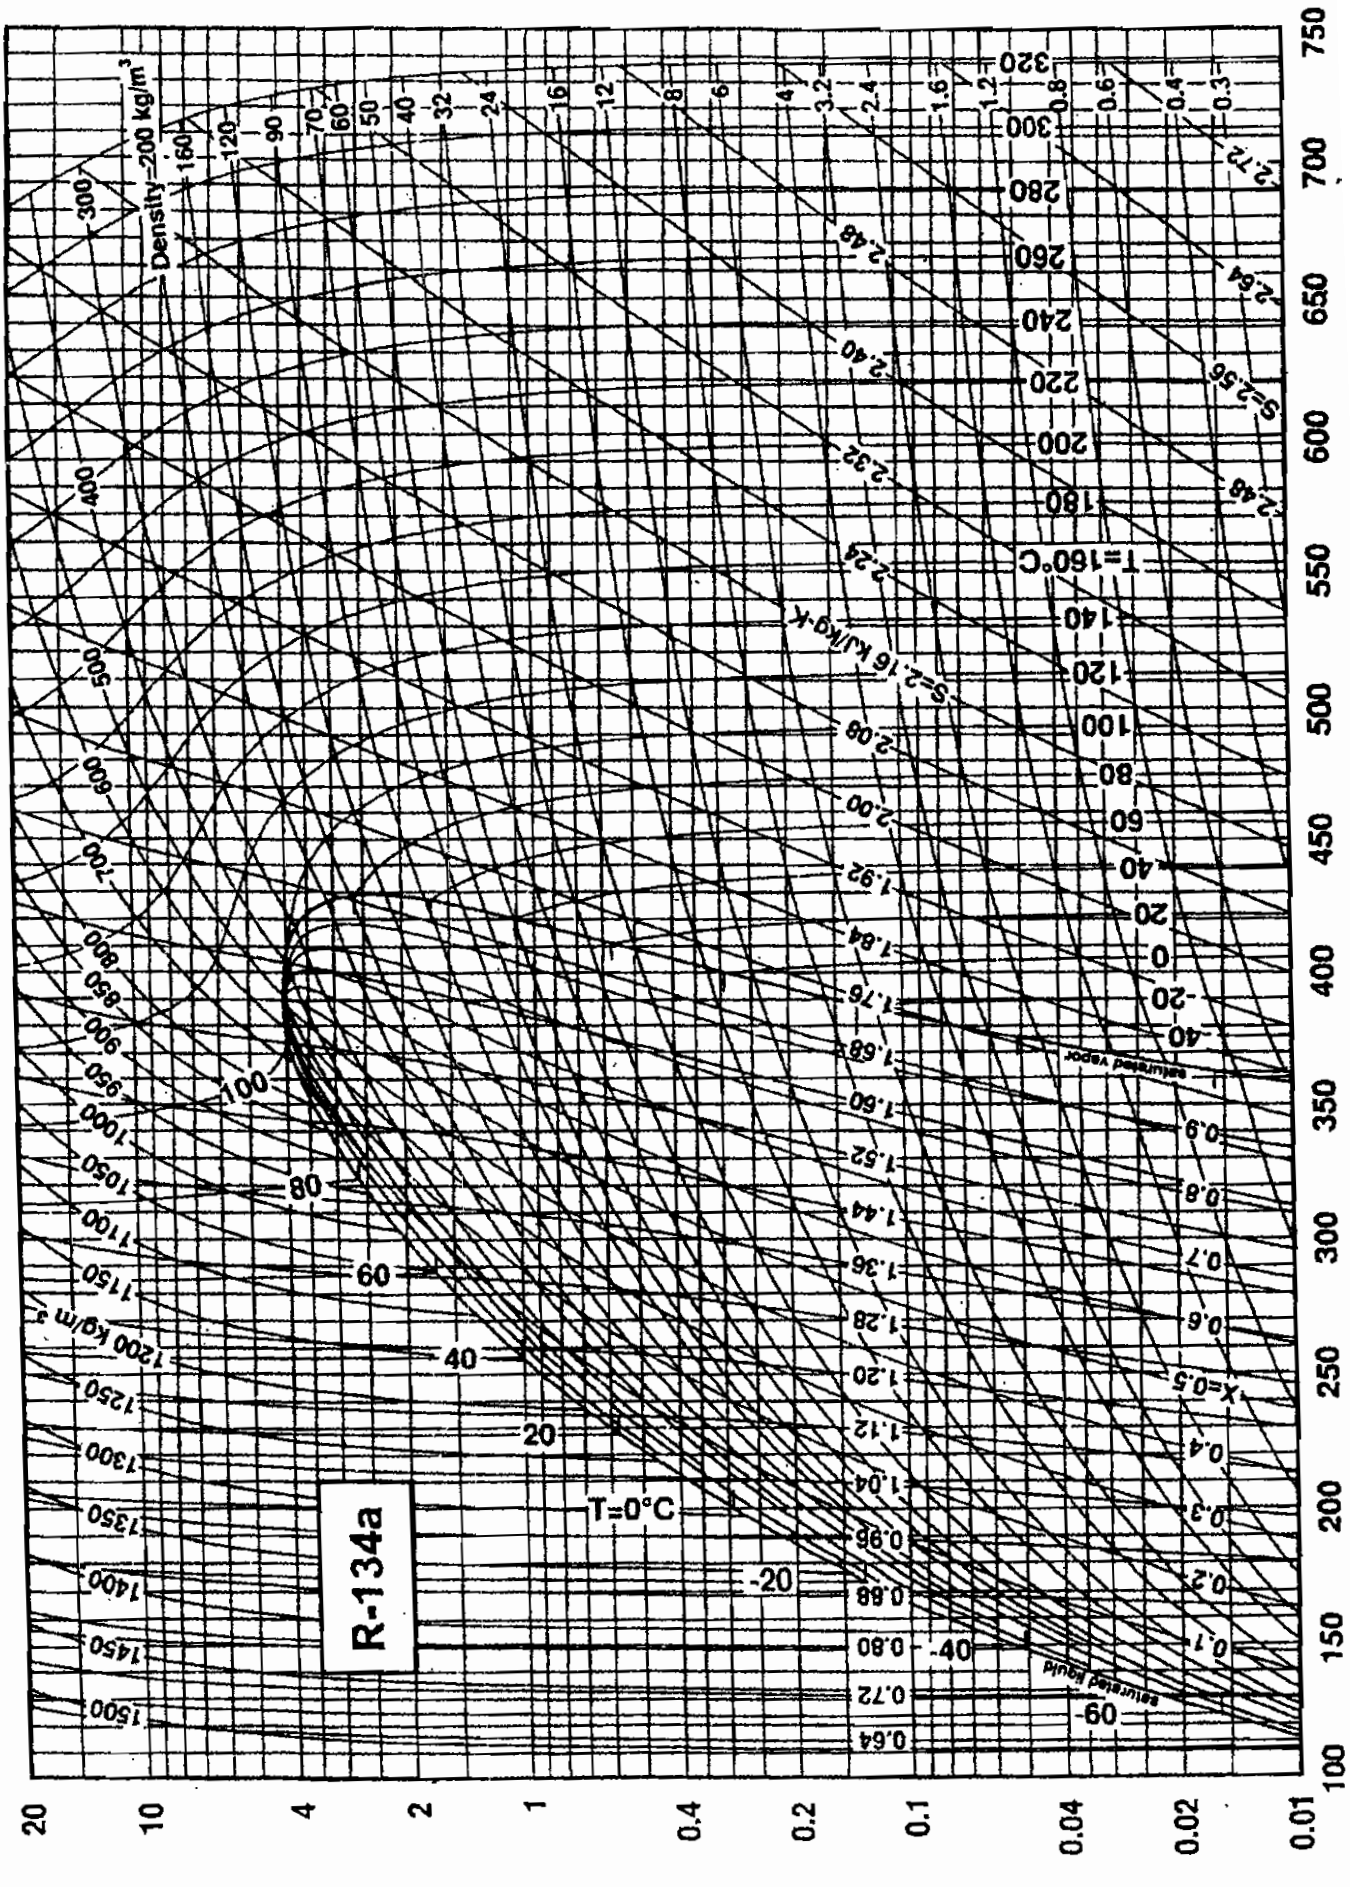

Name..... ID No. .....Seat No.....

มหาวิทยาลัยเทคโนโลยีพระจอมเกล...

3 Given:- Atmospheric Pressure as 101.325 kPa.

Atmospheric Temperature as 36°C dry bulb and 28°C wet bulb

Air flow rate through A/C = 1 m^3/sec @ state 4

Return air / Fresh air = 4/1

Determine:- -Condition of air at state 3

-Condensate at A/C

-Heat load (heat input into the room)

-Heat load at A/C

-Show the states and the processes on the Psychrometric Chart.

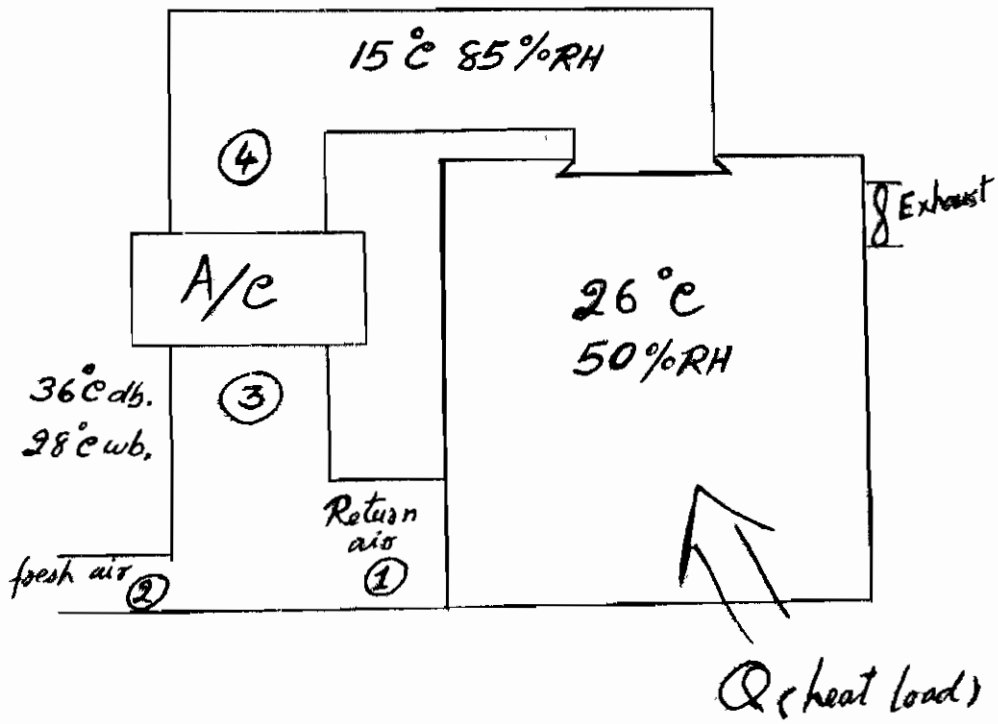

Name..... ID No. .....Seat No.....

Name..... ID No. .....Seat No.....

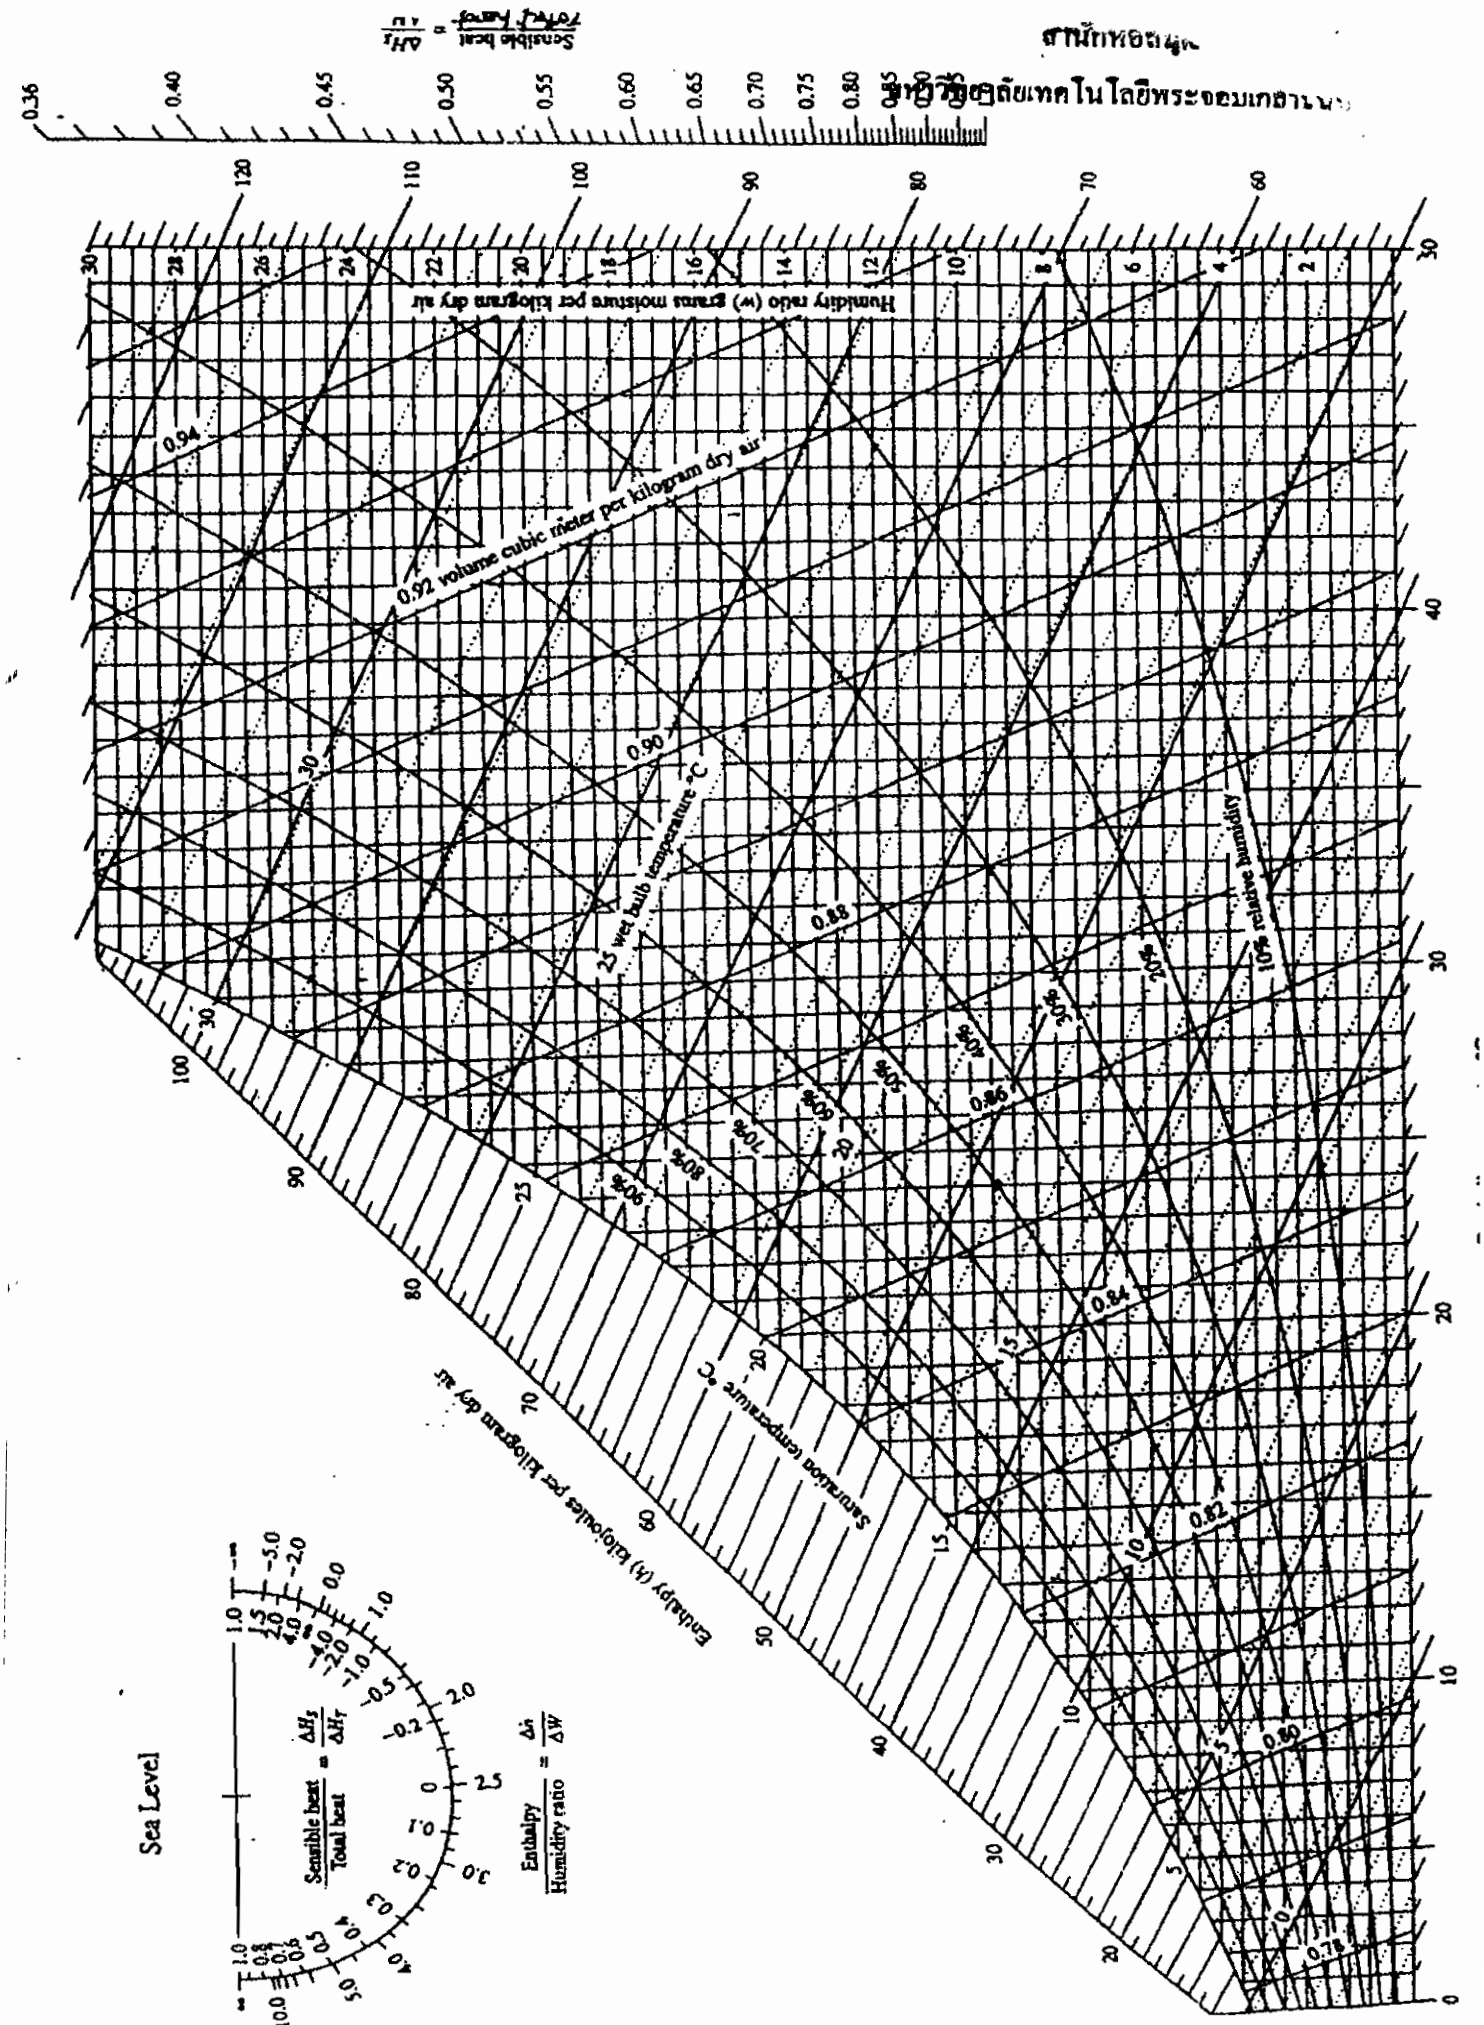

Name..... ID No. .....Seat No.....

4 A steam power plant operates on a simple ideal Rankine cycle between the pressure limits of 3MPa. and 50 kPa. The temperature of the steam at the turbine inlet is 300°C, and the mass flow rate of steam through the cycle is 10 kg/s. Show the cycle on a T-s diagram with respect to saturation lines and determine:-

(a) The thermal efficiency of the cycle

(b) The net power output of the power plant.

Name..... ID No. ..... Seat No.....

TABLE A-5
Saturated water: pressure table

Press. P kPa	Sat. temp. T_{sat} °C	Specific volume m³/kg		Internal energy kJ/kg			Enthalpy kJ/kg			Entropy kJ/(kg · K)		
		Sat. liquid v_f	Sat. vapor v_g	Sat. liquid u_f	Evap. u_{fg}	Sat. vapor u_g	Sat. liquid h_f	Evap. h_{fg}	Sat. vapor h_g	Sat. liquid s_f	Evap. s_{fg}	Sat. vapor s_g
0.6113	0.01	0.001000	206.14	0.00	2375.3	2375.3	0.01	2501.3	2501.4	0.0000	9.1562	9.1562
1.0	6.98	0.001000	129.21	29.30	2355.7	2385.0	29.30	2484.9	2514.2	0.1059	8.8697	8.9756
1.5	13.03	0.001001	87.98	54.71	2338.6	2393.3	54.71	2470.6	2525.3	0.1957	8.6322	8.8279
2.0	17.50	0.001001	67.00	73.48	2326.0	2399.5	73.48	2460.0	2533.5	0.2607	8.4629	8.7237
2.5	21.08	0.001002	54.25	88.48	2315.9	2404.4	88.49	2451.6	2540.0	0.3120	8.3311	8.6432
3.0	24.08	0.001003	45.67	101.04	2307.5	2408.5	101.05	2444.5	2545.5	0.3545	8.2231	8.5776
4.0	28.96	0.001004	34.80	121.45	2293.7	2415.2	121.46	2432.9	2554.4	0.4226	8.0520	8.4746
5.0	32.88	0.001005	28.19	137.81	2282.7	2420.5	137.82	2423.7	2561.5	0.4764	7.9187	8.3951
7.5	40.29	0.001008	19.24	168.78	2261.7	2430.5	168.79	2406.0	2574.8	0.5764	7.6750	8.2515
10	45.81	0.001010	14.67	191.82	2246.1	2437.9	191.83	2392.8	2584.7	0.6493	7.5009	8.1502
15	53.97	0.001014	10.02	225.92	2222.8	2448.7	225.94	2373.1	2599.1	0.7549	7.2536	8.0085
20	60.06	0.001017	7.649	251.38	2205.4	2456.7	251.40	2358.3	2609.7	0.8320	7.0766	7.9085
25	64.97	0.001020	6.204	271.90	2191.2	2463.1	271.93	2346.3	2618.2	0.8931	6.9383	7.8314
30	69.10	0.001022	5.229	289.20	2179.2	2468.4	289.23	2336.1	2625.3	0.9439	6.8247	7.7686
40	75.87	0.001027	3.993	317.53	2159.5	2477.0	317.58	2319.2	2636.8	1.0259	6.6441	7.6700
50	81.33	0.001030	3.240	340.44	2143.4	2483.9	340.49	2305.4	2645.9	1.0910	6.5029	7.5939
75	91.78	0.001037	2.217	384.31	2112.4	2496.7	384.39	2278.6	2663.0	1.2130	6.2434	7.4564
Press. MPa												
0.100	99.63	0.001043	1.6940	417.36	2088.7	2506.1	417.46	2258.0	2675.5	1.3026	6.0568	7.3594
0.125	105.99	0.001048	1.3749	444.19	2069.3	2513.5	444.32	2241.0	2685.4	1.3740	5.9104	7.2844
0.150	111.37	0.001053	1.1593	466.94	2052.7	2519.7	467.11	2226.5	2693.6	1.4336	5.7897	7.2233
0.175	116.06	0.001057	1.0036	486.80	2038.1	2524.9	486.99	2213.6	2700.6	1.4849	5.6868	7.1717
0.200	120.23	0.001061	0.8857	504.49	2025.0	2529.5	504.70	2201.9	2706.7	1.5301	5.5970	7.1271
0.225	124.00	0.001064	0.7933	520.47	2013.1	2533.6	520.72	2191.3	2712.1	1.5706	5.5173	7.0878
0.250	127.44	0.001067	0.7187	535.10	2002.1	2537.2	535.37	2181.5	2716.9	1.6072	5.4455	7.0527
0.275	130.60	0.001070	0.6573	548.59	1991.9	2540.5	548.89	2172.4	2721.3	1.6408	5.3801	7.0209
0.300	133.55	0.001073	0.6058	561.15	1982.4	2543.6	561.47	2163.8	2725.3	1.6718	5.3201	6.9919
0.325	136.30	0.001076	0.5620	572.90	1973.5	2546.4	573.25	2155.8	2729.0	1.7006	5.2646	6.9652
0.350	138.88	0.001079	0.5243	583.95	1965.0	2548.9	584.33	2148.1	2732.4	1.7275	5.2130	6.9405
0.375	141.32	0.001081	0.4914	594.40	1956.9	2551.3	594.81	2140.8	2735.6	1.7528	5.1647	6.9175
0.40	143.63	0.001084	0.4625	604.31	1949.3	2553.6	604.74	2133.8	2738.6	1.7766	5.1193	6.8959
0.45	147.93	0.001088	0.4140	622.77	1934.9	2557.6	623.25	2120.7	2743.9	1.8207	5.0359	6.8565
0.50	151.86	0.001093	0.3749	639.68	1921.6	2561.2	640.23	2108.5	2748.7	1.8607	4.9606	6.8213
0.55	155.48	0.001097	0.3427	655.32	1909.2	2564.5	665.93	2097.0	2753.0	1.8973	4.8920	6.7893
0.60	158.85	0.001101	0.3157	669.90	1897.5	2567.4	670.56	2086.3	2756.8	1.9312	4.8288	6.7600
0.85	162.01	0.001104	0.2927	683.56	1886.5	2570.1	684.28	2076.0	2760.3	1.9627	4.7703	6.7331
0.70	164.97	0.001108	0.2729	696.44	1876.1	2572.5	697.22	2066.3	2763.5	1.9922	4.7158	6.7080
0.75	167.78	0.001112	0.2556	708.64	1866.1	2574.7	709.47	2057.0	2766.4	2.0200	4.6647	6.6847
0.80	170.43	0.001115	0.2404	720.22	1856.6	2576.8	721.11	2048.0	2769.1	2.0462	4.6166	6.6628
0.85	172.96	0.001118	0.2270	731.27	1847.4	2578.7	732.22	2039.4	2771.6	2.0710	4.5711	6.6421
0.90	175.38	0.001121	0.2150	741.83	1838.6	2580.5	742.83	2031.1	2773.9	2.0946	4.5280	6.6226
0.95	177.69	0.001124	0.2042	751.95	1830.2	2582.1	753.02	2023.1	2776.1	2.1172	4.4869	6.6041
1.00	179.91	0.001127	0.19444	761.68	1822.0	2583.6	762.81	2015.3	2778.1	2.1387	4.4478	6.5865
1.10	184.09	0.001133	0.17753	780.09	1806.3	2586.4	781.34	2000.4	2781.7	2.1792	4.3744	6.5536
1.20	187.99	0.001139	0.16333	797.29	1791.5	2588.8	798.65	1986.2	2784.6	2.2166	4.3067	6.5233
1.30	191.64	0.001144	0.15125	813.44	1777.5	2591.0	814.93	1972.7	2787.6	2.2515	4.2438	6.4953

Name..... ID No. .....Seat No.....

TABLE A-

Superheated water (*Continued*)

T °C	*v* m³/kg	*u* kJ/kg	*h* kJ/kg	*s* kJ/(kg · K)	*v* m³/kg	*u* kJ/kg	*h* kJ/kg	*s* kJ/(kg · K)	*v* m³/kg	*u* kJ/kg	*h* kJ/kg	*s* kJ/(kg · K)
	P = 1.00 MPa (179.91°C)				*P* = 1.20 MPa (187.99°C)				*P* = 1.40 MPa (195.07°C)			
Sat.	0.19444	2583.6	2778.1	6.5865	0.16333	2588.8	2784.8	6.5233	0.14084	2592.8	2790.0	6.4693
200	0.2060	2621.9	2827.9	6.6940	0.16930	2612.8	2815.9	6.5898	0.14302	2603.1	2803.3	6.4975
250	0.2327	2709.9	2942.6	6.9247	0.19234	2704.2	2935.0	6.8294	0.16350	2698.3	2927.2	6.7467
300	0.2579	2793.2	3051.2	7.1229	0.2138	2789.2	3045.6	7.0317	0.18228	2785.2	3040.4	6.9534
350	0.2825	2875.2	3157.7	7.3011	0.2345	2872.2	3153.6	7.2121	0.2003	2869.2	3149.5	7.1360
400	0.3066	2957.3	3263.9	7.4651	0.2548	2954.9	3260.7	7.3774	0.2178	2952.5	3257.5	7.3026
500	0.3541	3124.4	3478.5	7.7622	0.2946	3122.8	3476.3	7.6759	0.2521	3121.1	3474.1	7.6027
600	0.4011	3296.8	3697.9	8.0290	0.3339	3295.6	3696.3	7.9435	0.2860	3294.4	3694.8	7.8710
700	0.4478	3475.3	3923.1	8.2731	0.3729	3474.4	3922.0	8.1881	0.3195	3473.8	3920.8	8.1160
800	0.4943	3660.4	4154.7	8.4996	0.4118	3659.7	4153.8	8.4148	0.3528	3659.0	4153.0	8.3431
900	0.5407	3852.2	4392.9	8.7118	0.4505	3851.6	4392.2	8.6272	0.3861	3851.1	4391.5	8.5556
1000	0.5871	4050.5	4637.6	8.9119	0.4892	4050.0	4637.0	8.8274	0.4192	4049.5	4636.4	8.7559
1100	0.6335	4255.1	4888.6	9 1017	0.5278	4254.6	4888.0	9.0172	0.4524	4254.1	4887.5	8.9457
1200	0.6798	4465.6	5145.4	9.2822	0.5665	4465.1	5144.9	9.1977	0.4855	4464.7	5144.4	9.1262
1300	0.7261	4681.3	5407.4	9.4543	0.6051	4680.9	5407.0	9.3698	0.5186	4680.4	5406.5	9.2984
	P = 1.60 MPa (201.41°C)				*P* = 1.80 MPa (207.15°C)				*P* = 2.00 MPa (212.42°C)			
Sat.	0.12380	2596.0	2794.0	6.4218	0.11042	2598.4	2797.1	6.3794	0.09963	2600.3	2799.5	6.3409
225	0.13287	2644.7	2857.3	6.5518	0.11673	2636.6	2848.7	8.4808	0.10377	2628.3	2835.8	6.4147
250	0.14184	2692.3	2919.2	6.6732	0.12497	2686.0	2911.0	6.6066	0.11144	2679.6	2902.5	6.5453
300	0.15862	2781.1	3034.8	6.8844	0.14021	2776 9	3029.2	6.8226	0.12547	2772.6	3023.5	6.7664
350	0.17456	2866.1	3145.4	7.0694	0.15457	2863.0	3141.2	7.0100	0.13857	2859.8	3137.0	6.9563
400	0.19005	2950.1	3254.2	7.2374	0.16847	2947.7	3250.9	7.1794	0.15120	2945.2	3247.6	7.1271
500	0.2203	3119.5	3472.0	7.5390	0.19550	3117.9	3469.8	7.4825	0.17568	3116.2	3467.6	7.4317
600	0.2500	3293.3	3693.2	7.8080	0.2220	3292.1	3691.7	7.7523	0.19960	3290.9	3690.1	7.7024
700	0.2794	3472.7	3919.7	8.0535	0.2482	3471.8	3918.5	7.9983	0.2232	3470.9	3917.4	7.9487
800	0.3086	3658.3	4152.1	8.2808	0.2742	3657.6	4151.2	8.2258	0.2467	3657.0	4150.3	8.1765
900	0.3377	3850.5	4390.8	8.4935	0.3001	3849.9	4390.1	8.4386	0.2700	3849.3	4389.4	8.3895
1000	0.3668	4049.0	4635.8	8.6938	0.3260	4048.5	4635.2	8.6391	0.2933	4048.0	4634.6	8.5901
1100	0.3958	4253.7	4887.0	8.8837	0.3518	4253 2	4886.4	8.8290	0.3166	4252.7	4885.9	8.7800
1200	0.4248	4464.2	5143.9	9.0643	0.3776	4463.7	5143.4	9.0096	0.3398	4463.3	5142.9	8.9607
1300	0.4538	4679.9	5406.0	9.2364	0.4034	4679.5	5405.6	9.1818	0.3631	4679.0	5405.1	9.1329
	P = 2.50 MPa (223.99°C)				*P* = 3.00 MPa (233.90°C)				*P* = 3.50 MPa (242.60°C)			
Sat.	0.07998	2603.1	2803.1	6.2575	0.06668	2604.1	2804.2	8.1869	0.05707	2603.7	2803.4	6.1253
225	0.08027	2605.6	2806.3	6.2639								
250	0.08700	2662.6	2880.1	6.4085	0.07058	2644.0	2855.8	6.2872	0.05872	2623.7	2829.2	8.1749
300	0.09890	2761.6	3008.8	6.8438	0.08114	2750.1	2993.5	6.5390	0.06842	2738.0	2977.5	6.4461
350	0.10976	2851.9	3126.3	6.8403	0.09053	2843 7	3115.3	6.7428	0.07678	2835.3	3104.0	6.6579
400	0.12010	2939.1	3239.3	7.0148	0.09936	2932.8	3230.9	6 9212	0.08453	2926.4	3222.3	6.8405
450	0.13014	3025.5	3350.8	7.1746	0.10787	3020.4	3344.0	7.0834	0.09196	3015.3	3337.2	7.0052
500	0.13993	3112.1	3462.1	7.3234	0.11619	3106.0	3456.5	7.2338	0.09918	3103.0	3450.9	7.1572
600	0.15930	3288.0	3686.3	7.5960	0.13243	3285.0	3682.3	7.5085	0.11324	3282.1	3678.4	7.4339
700	0.17832	3468.7	3914.5	7.8435	0.14838	3466 5	3911.7	7.7571	0.12699	3464.3	3908 8	7 6837
800	0.19716	3655.3	4148.2	8.0720	0.16414	3653.5	4145.9	7.9862	0.14056	3651.8	4143.7	7 9134
900	0.21590	3847.9	4387.6	8.2853	0.17980	3846.5	4385.9	8.1999	0.15402	3845.0	4384.1	8.1276
1000	0.2346	4046.7	4633.1	8.4861	0.19541	4045.4	4631.6	8.4009	0.16743	4044.1	4630.1	8.3288
1100	0.2532	4251.5	4884.6	8.6762	0.21098	4250.3	4883.3	8.5912	0.18080	4249.2	4881.9	8.5192
1200	0.2718	4462.1	5141.7	8.8569	0.22652	4460.9	5140.5	8.7720	0.19415	4459.8	5139.3	8.7000
1300	0.2905	4677.8	5404.0	9.0291	0.24206	4676.8	5402.8	8.9442	0.20749	4675.5	5401.7	8.8723