

Fig. 18: Relay module pin details

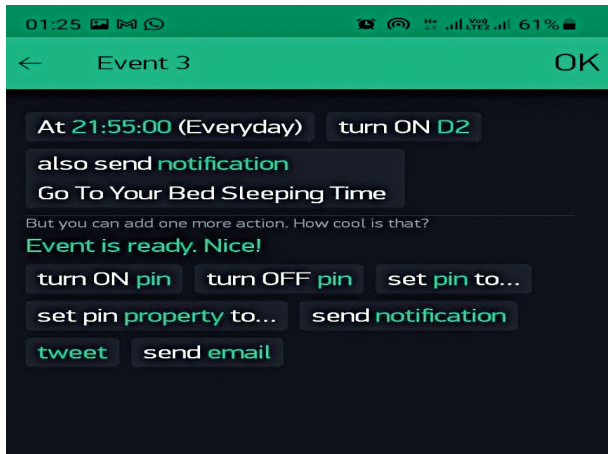


Fig. 19: Setting digital pin D2 to turn on

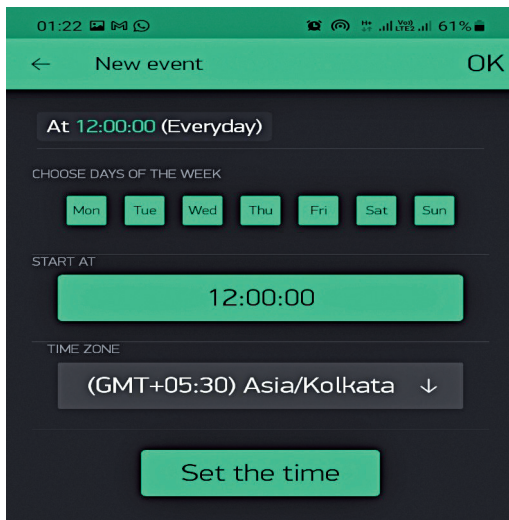


Fig. 20: Choosing time and day of the week

14. You will now see another screen to choose the higher and lower conditions for the sensor input data. Choose these values according to the readings generated by the IR sensor. You can select the lower value as 40 or just above that. Here, the lower value is 50 as shown in Fig. 16.

15. Now you will be prompted to take action. Select 'Turn off D2' command to turn the lamp on and click OK as shown in Fig. 17. It is because

the relay module is connected to D2 pin of NodeMCU (Board2). See the relay module pin details in Fig.18.

(**Note.** Relay model works like an on/off switch. As you can see from its pinout details, there are three pins: NC (normally-closed), NO (normally-open) and COM (common). The lamp is connected to NC, so whenever you connect it to the power supply, the lamp automatically turns on. So, for this reason when the turn-on command is sent, it actually turns off the lamp, and when the turn-off command is sent, the lamp turns on.)

16. Do the same way here as you did in the previous step, but here you have to command 'Turn on D2' as shown in Fig. 19. With this command the lamp will turn off. Note that you need to select this condition according to the readings from IR sensor. In this example, maximum reading is 1024. So, when V5 is equal to 1024, it will turn the lamp off.

17. To set the bed-time alert, click on the Time option from + Add New Event. Then select the day of the week, the time (either start time to turn-on the lamp or time to turn-off the lamp for bed time), and

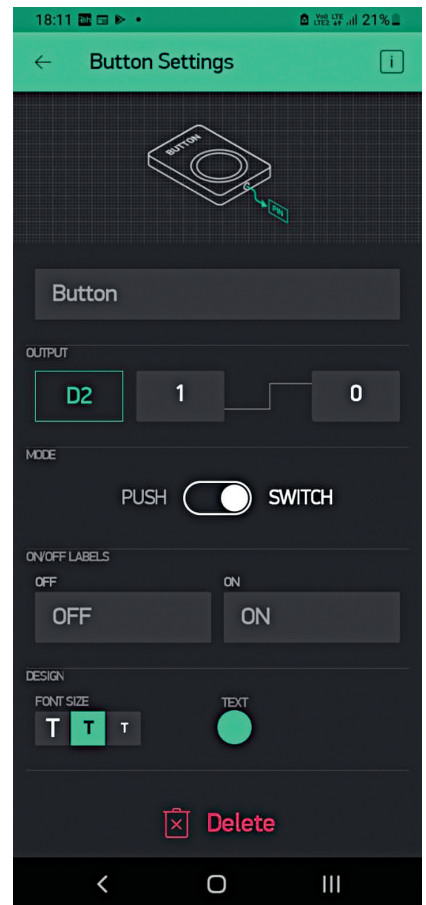


Fig. 21: Setting the button to switch mode

your time zone. Then click on 'Set the time' as shown in Fig. 20.

18. You will be prompted to take action. Choose 'Turn on D2' and select notification option and set your text like "Go to bed, it's time to sleep," and then click OK.

19. Click on Button to configure its settings. Select OUPUT as D2, replace '1' with '0' and '0' with '1' and change the mode from Push to Switch as shown in Fig. 21.

Next, connect Board1 and Board2 to the power supply. Click on Play icon; Blynk app will automatically connect to the NodeMCU boards. Turn on the lamp either by touching the D2 button from the Blynk app or by sitting on the chair. That's it! You are good to go! **EFY**

EFY Note
The source code
of this project
is available
for free download
at source.efymag.com

