

Introduction


- ❖ It is a device which combines manual feeding with automatic rolling and cutting.
- ❖ It can produce 2 mm flat noodles with uniform thickness and size.
- ❖ Spur Gears are used in the power transmission system.
- ❖ This machine uses rollers to flatten the dough to the required thickness.
- ❖ This machine uses cutters to form noodle strands.
- ❖ It is suitable for small and medium-scale noodle production.

Purposes of Noodles-Making Machine

- ❖ The main purpose of the project is to gain knowledge of design and fabrication of a semi-automatic noodles making machine.
- ❖ To reduce manual labor in noodle production.
- ❖ To produce noodles with uniform thickness.
- ❖ To provide simple and efficient operation for SMEs.

Working Procedure

- ❖ Spur gears in the power transmission system receive power from a 1.5 hp motor through the driving and driven pulleys.
- ❖ Feed the dough into the rollers.
- ❖ The Noodles-cutting shafts cut the dough sheet into 2 mm uniform noodle strands.

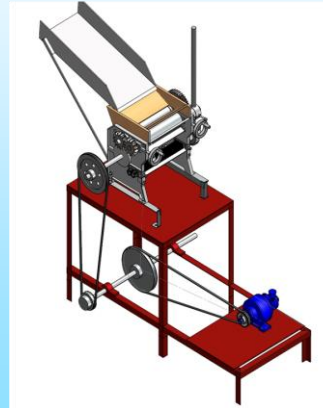

Components of Semi-automatic Noodles-Making



**Technological University
(Mandalay)**
Department of Mechanical Engineering


“Semi-Automatic Noodles-Making Machine”



Project Show



Labels of Semi-Automatic Noodles Making Machine

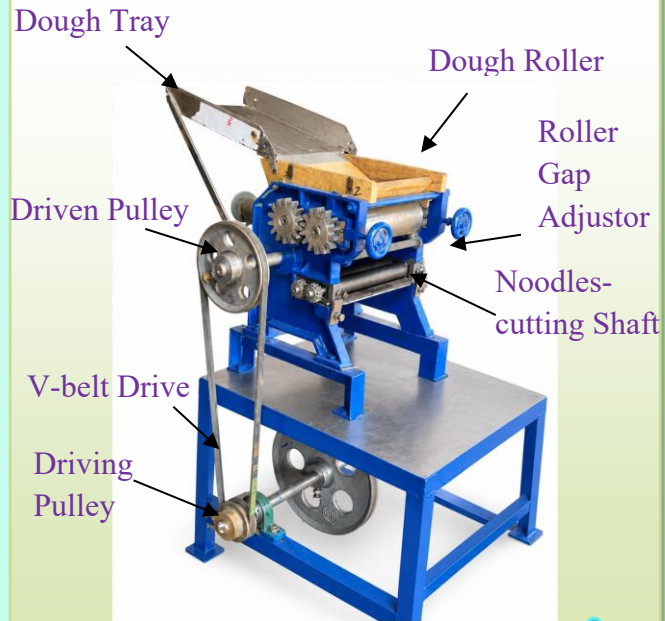

Fabrication Procedure


Materials

1. Motor
2. Pulley
3. V-Belt
4. Spur Gears
5. Dough Roller
6. Cutting Shafts
7. Brake
8. Thickness Adjustor
9. Dough Tray

Method

1. Measuring
2. Cutting
3. Welding
4. Inspecting

Fabrication Process

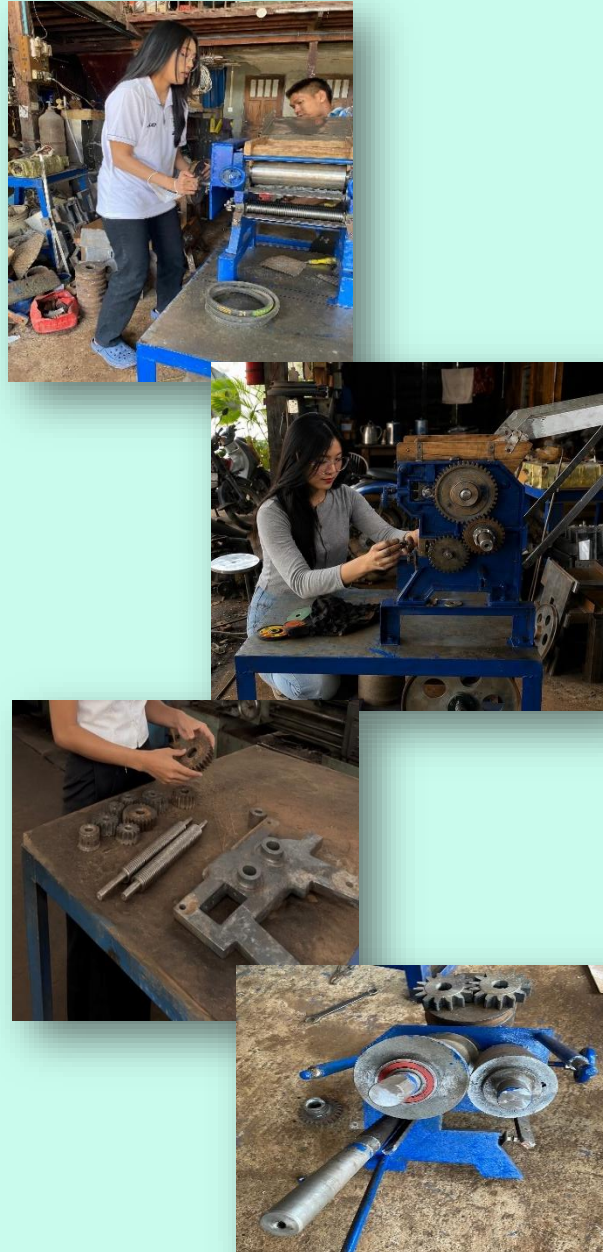

Performance Test



Performance Results

No	Weight of dough, W_d (g)	Weight of noodles before boiling, W_n (g)	Weight of noodles after boiling, W_b (g)	Weight of broken noodles, W_b (g)	Cutting time T , (s)	Capacity C , (kg/hr)	Efficiency η , (%)	Moisture Content, k (%)
1	1000	950	1680	70	53	114.11	95	63.5
2	1000	953	1683	74	54	112.2	95.3	63
3	1000	948	1658	68	51	117	94.8	64
Average Value		950.3	1674	71	53	115	95	63.5

Fabrication Procedure