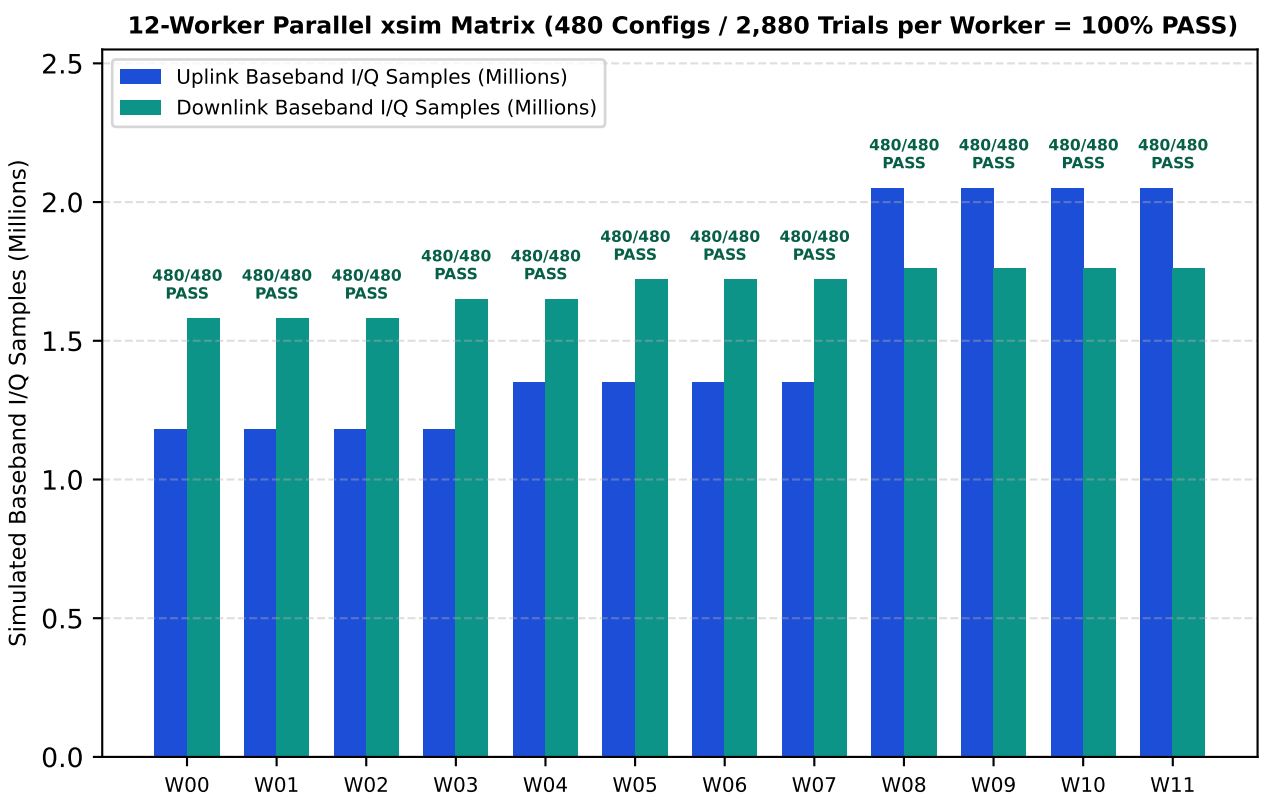
12-Worker Parallel xsim Matrix (480 Configs / 2,880 Trials per Worker = 100% PASS)
Uplink Baseband I/Q Samples (Millions)
Downlink Baseband I/Q Samples (Millions)
Simulated Baseband I/Q Samples (Millions)
480/480 PASS
W00
W01
W02
W03
W04
W05
W06
W07
W08
W09
W10
W11

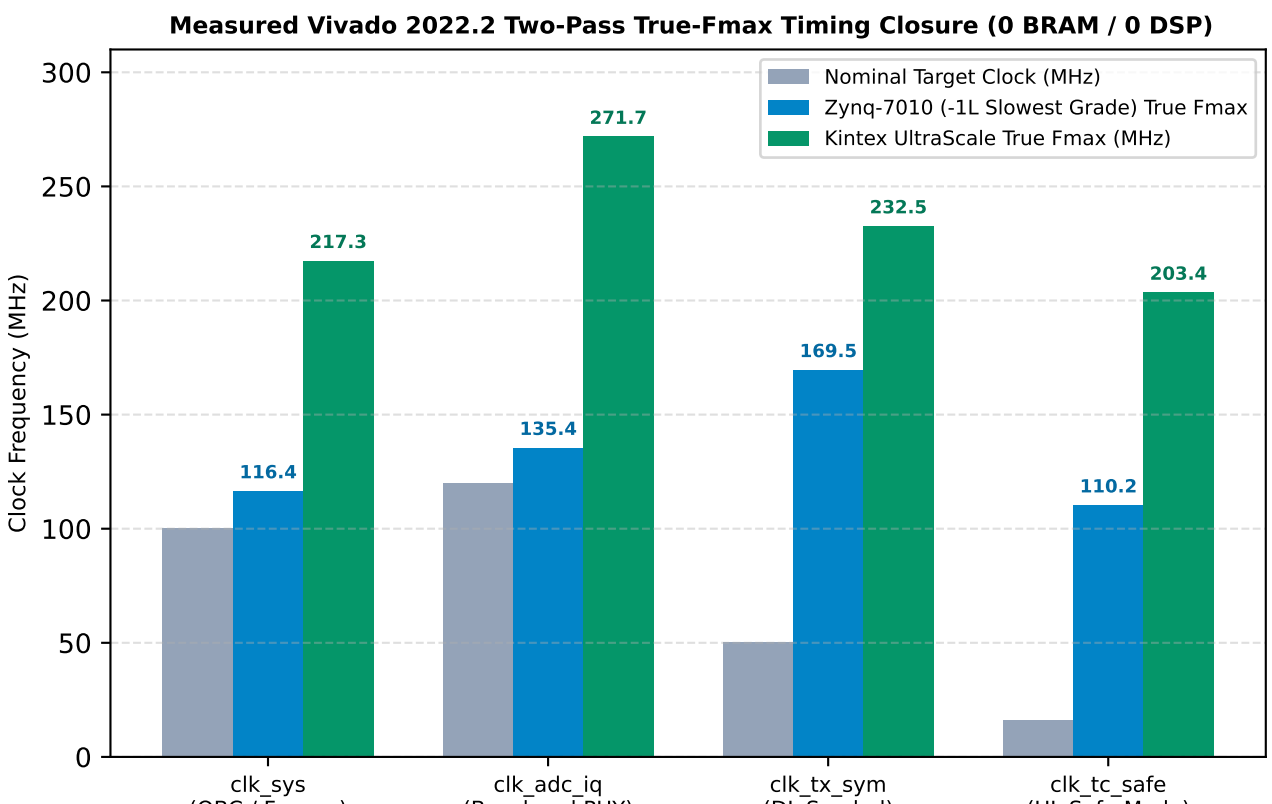
Measured Vivado 2022.2 Two-Pass True-Fmax Timing Closure (0 BRAM / 0 DSP)
Nominal Target Clock (MHz)
Zynq-7010 (-1L Slowest Grade) True Fmax
Kintex UltraScale True Fmax (MHz)
Clock Frequency (MHz)
116.4
217.3
135.4
271.7
169.5
232.5
110.2
203.4
clk_sys
(OBC / Framer)
clk_adc_iq
(Baseband PHY)
clk_tx_sym
(DL Symbol)
clk_tc_safe
(UL Safe-Mode)