

Fig. 5: Creating a new block

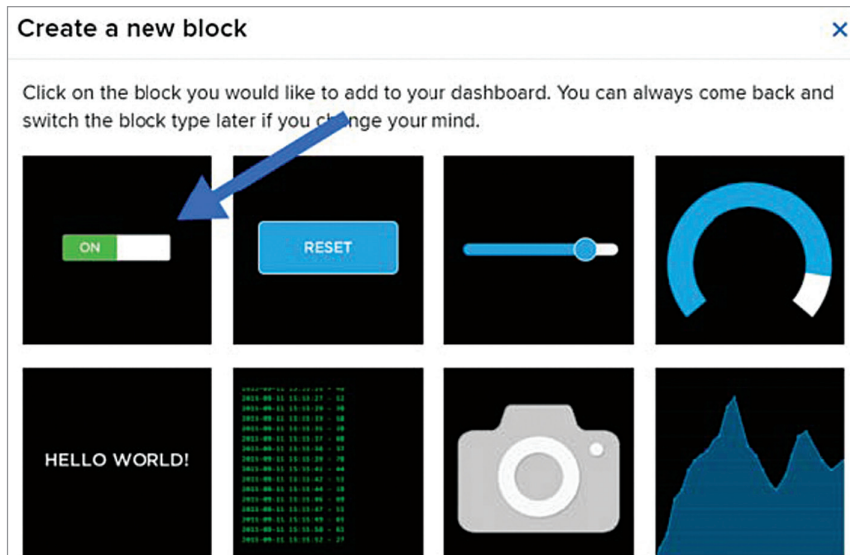


Fig. 6: Selecting toggle switch as your block

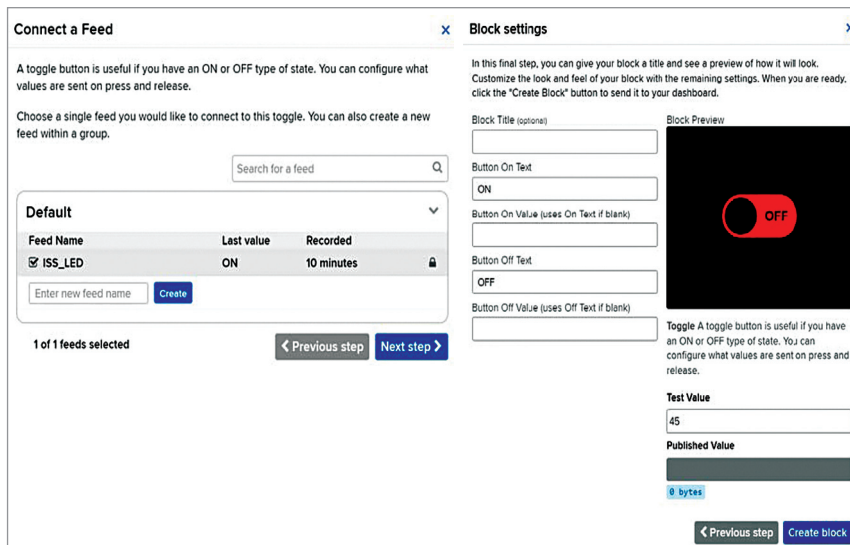


Fig. 7: Configuring the toggle switch

the stand, and the globe to work as a lamp.

For testing this project, you need Adafruit IO and IFTTT platforms. Adafruit IO is a cloud service

designed for the users to display, respond, and interact with their data safely and securely in the cloud. IFTTT derives its name from the programming conditional statement

“if this, then that” and is a software platform that connects apps, devices, and services from different developers to trigger one or more automations involving them.

To make the project, first set up Adafruit IO and then install the IFTTT app, which is easily available for free on internet. To set up Adafruit, open the website io.adafruit.com, create an account, and login. Then follow the steps mentioned below:

1. Click on Feeds in the top bar and select New Feed, as shown in Fig. 2.

Give a name to your feed. You may use the same name that has been used for the project (see Fig. 3), which is ISS_LED, as this will make the programming easier.

2. Click on Dashboards in the top bar and select New Dashboard, as shown in Fig. 4. Give it the same name as your feed, that is, ISS_LED.

3. Click on the dashboard you created and select the gear icon on the right (see Fig. 5). Then select ‘Create a new block’ and click on the toggle switch (see ON in Fig. 6).

4. Select your feed name (ISS_LED in this case) in the popup window and click on Next Step. In the next window, don’t change anything, just click Create Block.

5. Once your block has been created, click on My Key in the top bar (see Fig. 2) and note down your Username and Active Key, which is unique to your project. Do not share these with anyone as they may mess up your project (see Fig. 8).

Now that the Adafruit set up has been completed, you can set up IFTTT after downloading the IFTTT app (or you can just use the desktop site). To set up IFTTT, follow the steps below:

1. Click on Create (bottom left in Fig. 9) and select If This box. Search Space in the search bar and click on it. Click on ‘ISS passes over a specific location’ box and select your location.