

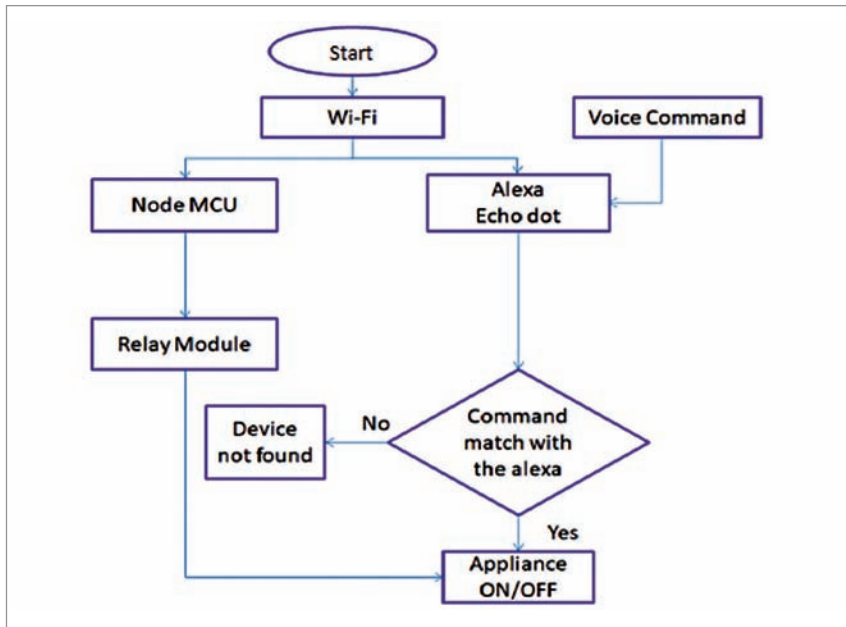


Fig. 5: Flow chart of the project

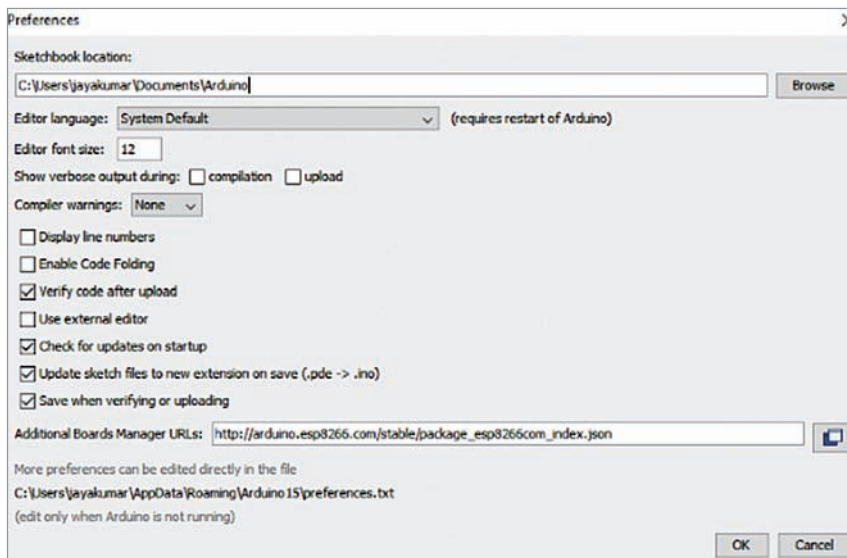


Fig. 6: Installing the boards

connected to external 5V DC supply. One terminal of the appliance is connected directly to the relay (normally open) and the other is in series with 220V AC supply and the relay pin (common).

Software

The software used for this project is Arduino for the microcontroller and Sinric from Alexa app to interface with the hardware. Install the Arduino software and then install

the necessary boards required for NodeMCU, as shown in Fig. 6.

Next, copy the below link and paste it in Boards Manager:

http://arduino.esp8266.com/stable/package_esp8266com_index.json

Click OK to close the preference tab. Go to Tools and Board, select Board Manager, and navigate to 'esp8266 by esp8266 community' and install the software for Arduino from there.

We are now ready to program



Don't Be A Loser!

You don't know how much you don't know.

Read

electronics
FOR YOU

to keep up-to-date with the tech world



To subscribe, visit efy.in or contact us at: 011-4059660
Email: support@efy.in

OR Scan This Code



Also available at all leading magazine outlets