



Make A 9V Battery Adaptor For Arduino Board

Amal Mathew

Arduino board requires a USB cable connected to a laptop/PC or an external AC/DC adaptor for power supply. If you want a portable Arduino based project, you need a battery for power supply. 9V PP3 is a popular battery and easily available in nearby general stores. So, we are going to make a DIY 9V battery adaptor for Arduino, as explained in this article. It works great for Arduino boards, development boards, evaluation boards, and more.

Normally, a DC jack/socket is provided on the Arduino board for external power adaptor, as shown in Fig. 1. Our project is to make a 9V battery adaptor plug to be used at DC jack/socket on the Arduino board.

This DIY 9V battery power adaptor is built using a drinking straw, aluminium foil, and snap connector, as shown in Fig. 2. The battery snap connector/clip may be taken from a dead 9V battery. The tools used for the project are shown in Fig. 3.

The following materials are required for this project:

- Plastic drinking straw
- Aluminium foil
- Pliers or screwdriver
- 9V PP3 battery
- Hook-up wires
- Glue gun
- Super glue
- Transparent tape
- Solder and soldering wire
- Scissors

Making a 2.1mm power plug

First, cut a 2cm long plastic straw from a drinking straw using a pair of scissors. Next, take two hook-up wires—red for positive wire and black for negative wire, each should be 10cm in length. Peel off some portion of the red wire's insulation cover from one of its ends, exposing



Fig. 1: Arduino board

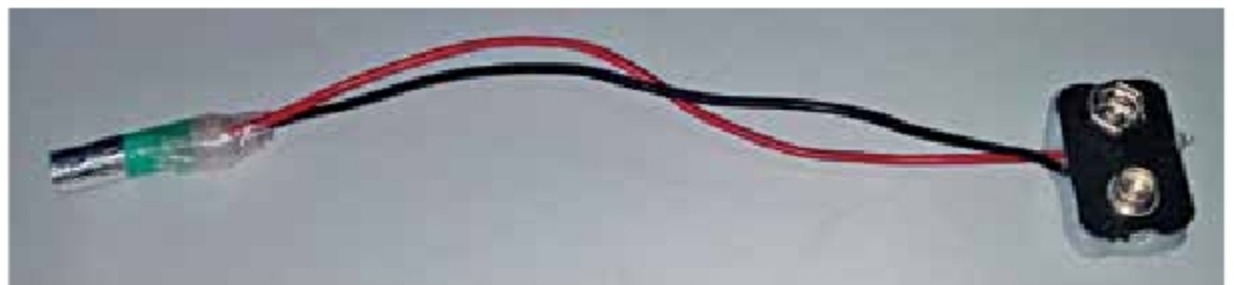


Fig. 2: 9V PP3 battery adaptor with snap connector



Fig. 3: Tools used in the project

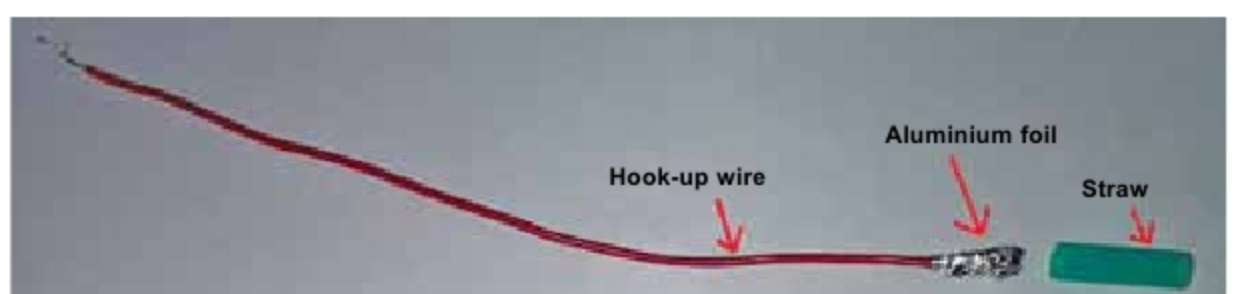


Fig. 4: Aluminium foil on the hook-up wire