

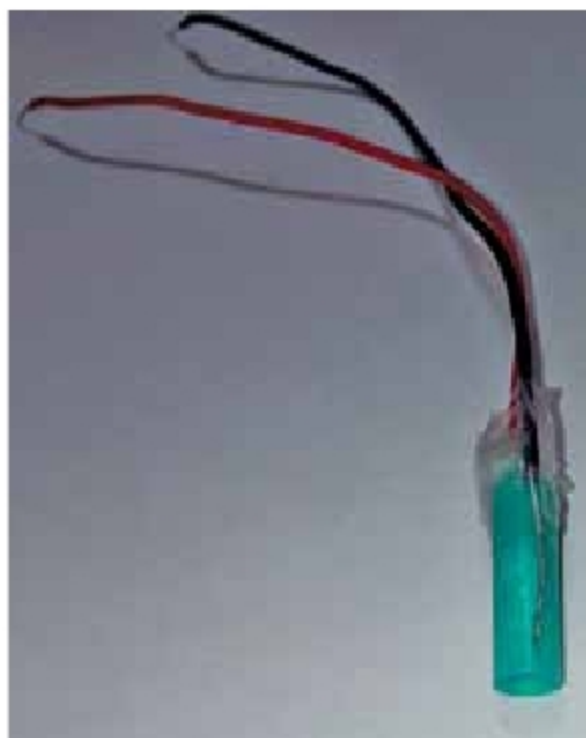


Fig. 5: Straw power plug



Fig. 6: Top and bottom portions of battery

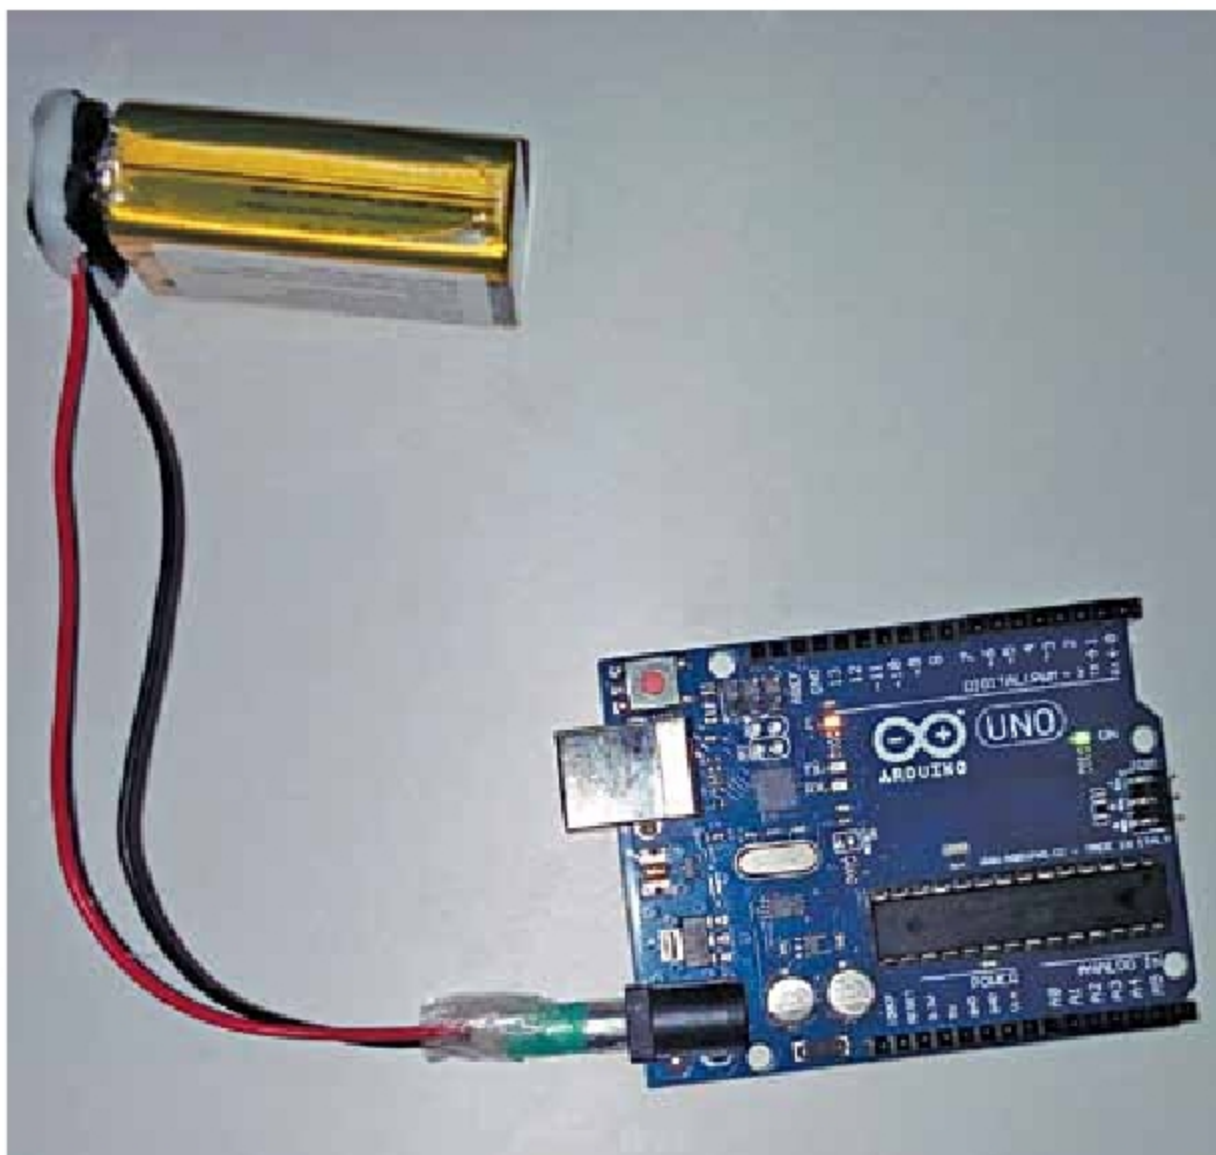


Fig. 9: Arduino board powered from a DIY 9V battery adaptor



Fig. 7: Dismantled parts of 9V battery

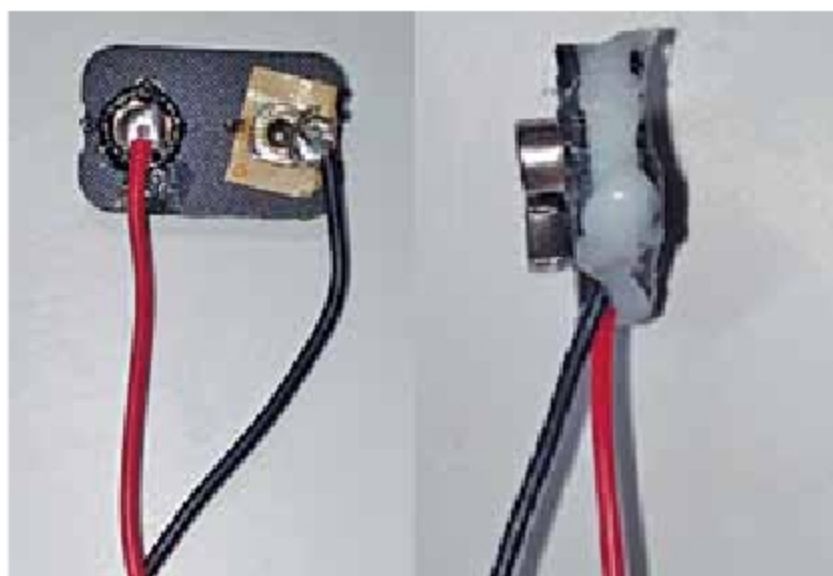


Fig. 8: Soldering and gluing the connector

around 1cm copper wire. Wrap a small piece of aluminium foil on the copper wire, as shown in Fig. 4. Place it inside the drinking straw and fix it using a glue gun.

Next, fix the black wire (after removing around 1cm insulation from its end) on the outer part of the straw using a transparent tape (Fig. 5). Make sure that some of the metallic/copper portion of the black wire is not covered with tape. To make it more rigid, fix the black wire on the straw using super glue.

Making a battery clip (snap connector)

It's a good idea to use the snap connector

from a dead 9V battery. This can be done by dismantling a dead 9V battery and then taking out the top and bottom parts of it, as shown in Fig. 6. You can dismantle the battery using pliers or screwdrivers. The dismantled parts of a 9V battery are shown in Fig. 7.

Connect the red and black wires on the snap connector, as shown in Fig. 8, by soldering at the appropriate positive and negative contacts. Paste the bottom portion on the snap connector using glue, as shown on the right side of Fig. 8.

You have successfully made a 9V adaptor for the Arduino board. Check continuity before connecting it to Arduino. Now, you can use your DIY 9V adaptor to power the Arduino board, as shown in Fig. 9. **EFY**



Amal Mathew is an electronics hobbyist