

```
x=(smoothThermistor.temperature);
update_button_list(buttons);
if (on_btn.justPressed()or command=='a') {
    tft.fillCircle(62, 35, 5, GREE);

    digitalWrite(led,HIGH);
    Serial.println("on");
}
if (off_btn.justPressed()or command=='c') {
    tft.fillCircle(62, 35, 5, MAROON);

    digitalWrite(led,LOW);
    Serial.println("off");
}
if (on_btn1.justPressed()or command=='d') {
    digitalWrite(led2,HIGH);

    tft.fillCircle(62, 54, 5, GREE);
    Serial.println("on2");
}
if (off_btn1.justPressed() or command=='e') {
    tft.fillCircle(62, 54, 5, MAROON);

    digitalWrite(led2,LOW);
    Serial.println("2");
}
tft.fillCircle(138, 80, 54, ORANGE);
```

Fig. 13: Setting touch button's functions

After connections are done, mount the TFT touch display shield on the Arduino Uno board. Then enclose all the components, including the Arduino board, TFT touch display shield, and relay module in a suitable plastic box, as shown in Fig. 17. Place TFT touch display carefully in the enclosure, as shown in Fig. 18. The final touch control panel on Android for wireless control is shown in Fig. 19.

Congratulations! Your smart touch switchboard is ready to use.

Testing

Check each connection carefully as one wrong con-

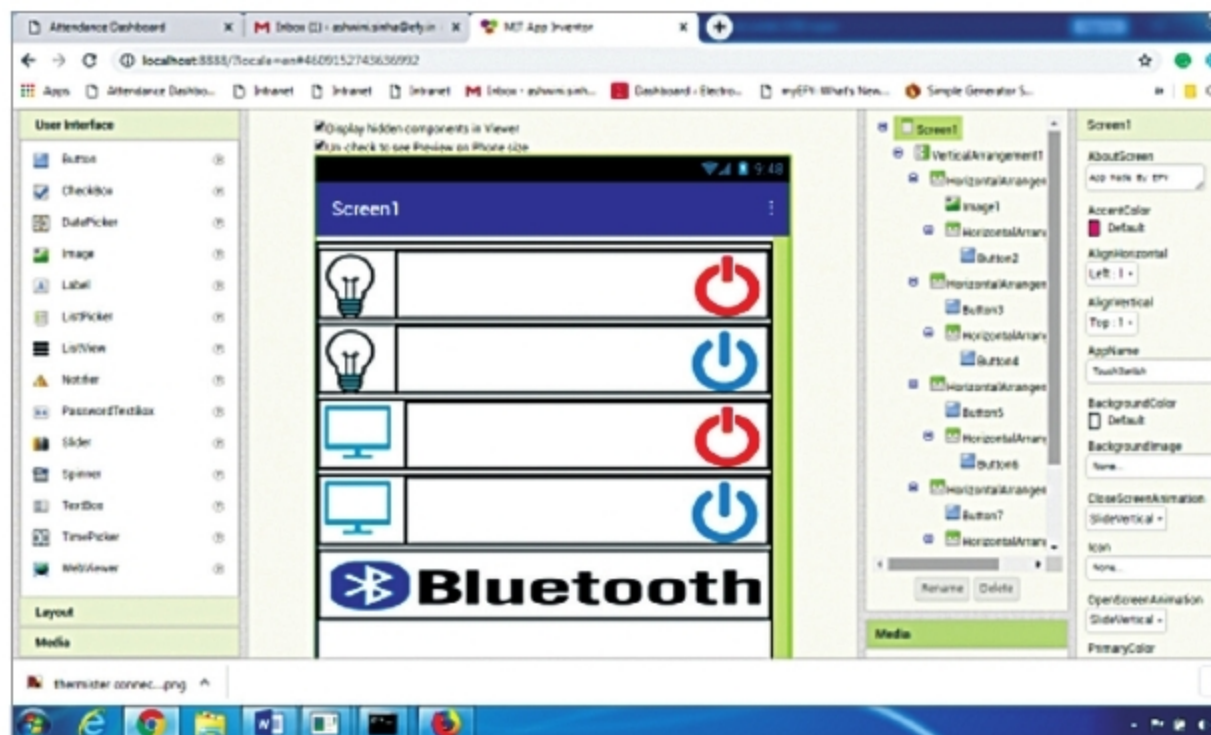


Fig. 14: App layout

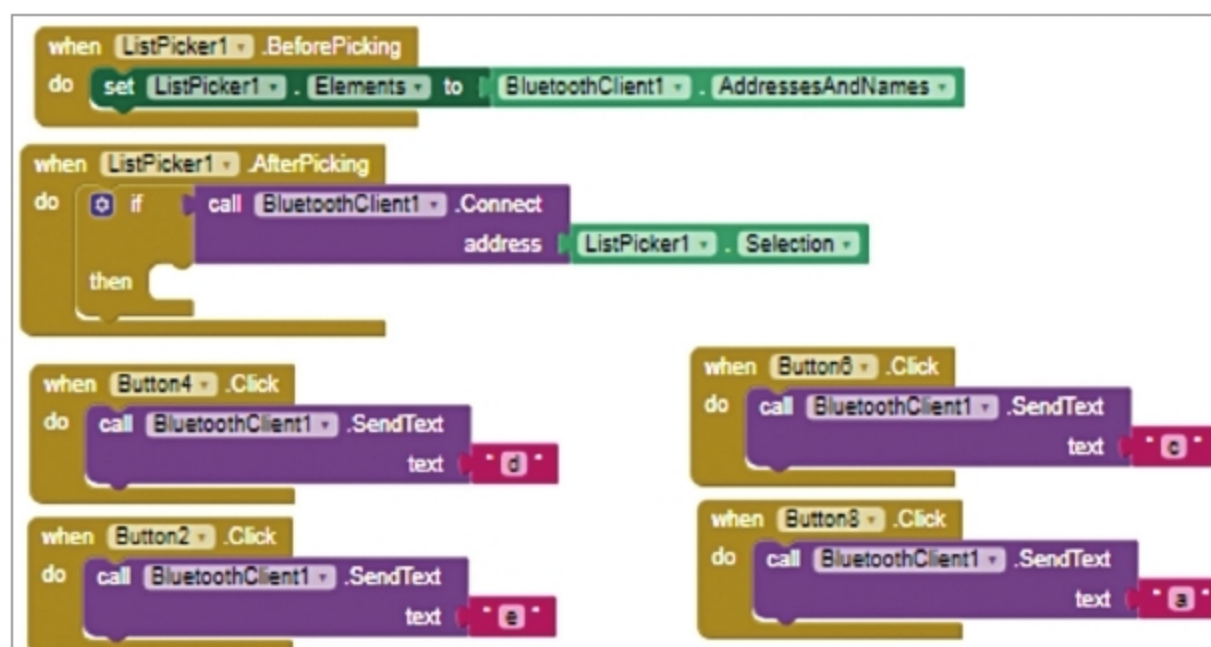


Fig. 15: MIT App Inventor code blocks

“Branding is what people say about you when you are not in the room.”



-Jeff Bezos

