

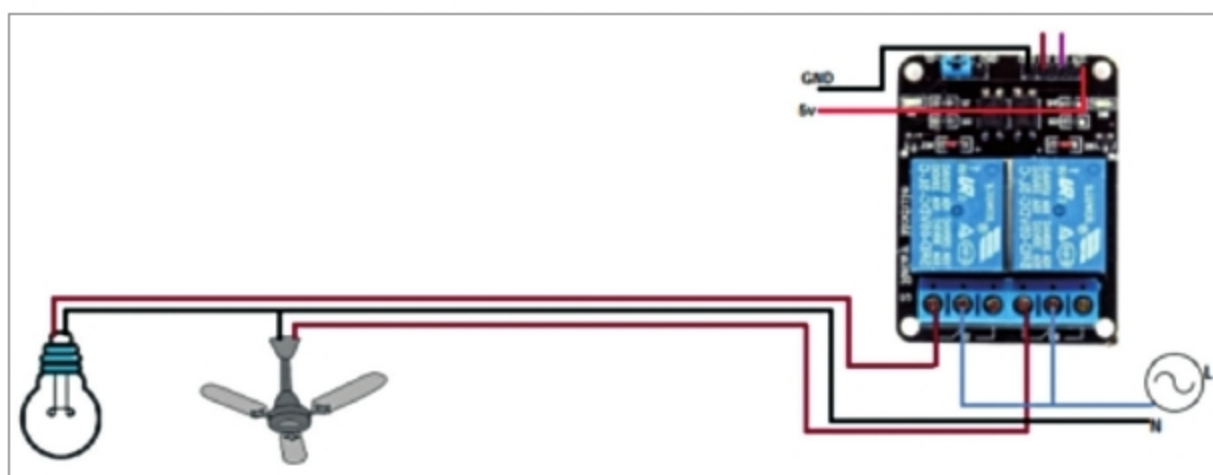


Fig. 7: Relay connections with bulb and fan



Fig. 8: Installation of gesture-controlled switch on wall switchboard



Fig. 9: Moving hand up in front of the contactless switch switches on light bulb

EFY Note

The source code of this project is available for free download at source.efymag.com

Arduino Connections with OLED and APDS Gesture Sensor

Table 2

Arduino Pro Micro	OLED and APDS 9960
SDA (Pin 2)	SDA
SCL (Pin 3)	SCL
GND	GND
VCC	VCC

Connections and testing

Connect the components as shown in Fig. 6, following Table 2. Then connect the 230V AC mains with the common pin of the relay module to control the light and fan as shown in Fig. 7.

Install the automatic contactless switch on the wall switchboard as shown in Fig. 8. Switch on 5V adaptor to power the device and relay module.

When you move your hand from down to up direction in front of the sensor, as shown in Fig. 9, light will switch on and at the same time an up arrow will be displayed on the OLED. If you move your hand from up to down position, the light will switch off and a down arrow will be displayed on the OLED.

Similarly, when you move your hand from left to right in front of the sensor, the fan will switch on and a left arrow symbol will be displayed on the OLED. If you move your hand from right to left, the fan will switch off and a right arrow will be displayed on the OLED. **EFY**

Ashwini Kumar Sinha is an electronics hobbyist and tech journalist at EFYi

What's New In Electronics & IoT
During These Challenging Times?

VISIT NOW <https://IndiaTechnologyWeek.com>



Visit 'Online Only' expo-cum-conference from the comfort of your HOME...

IndiaTechnologyWeek
@Home 2020

DECEMBER EDITION: 17-18 DEC, 2020