

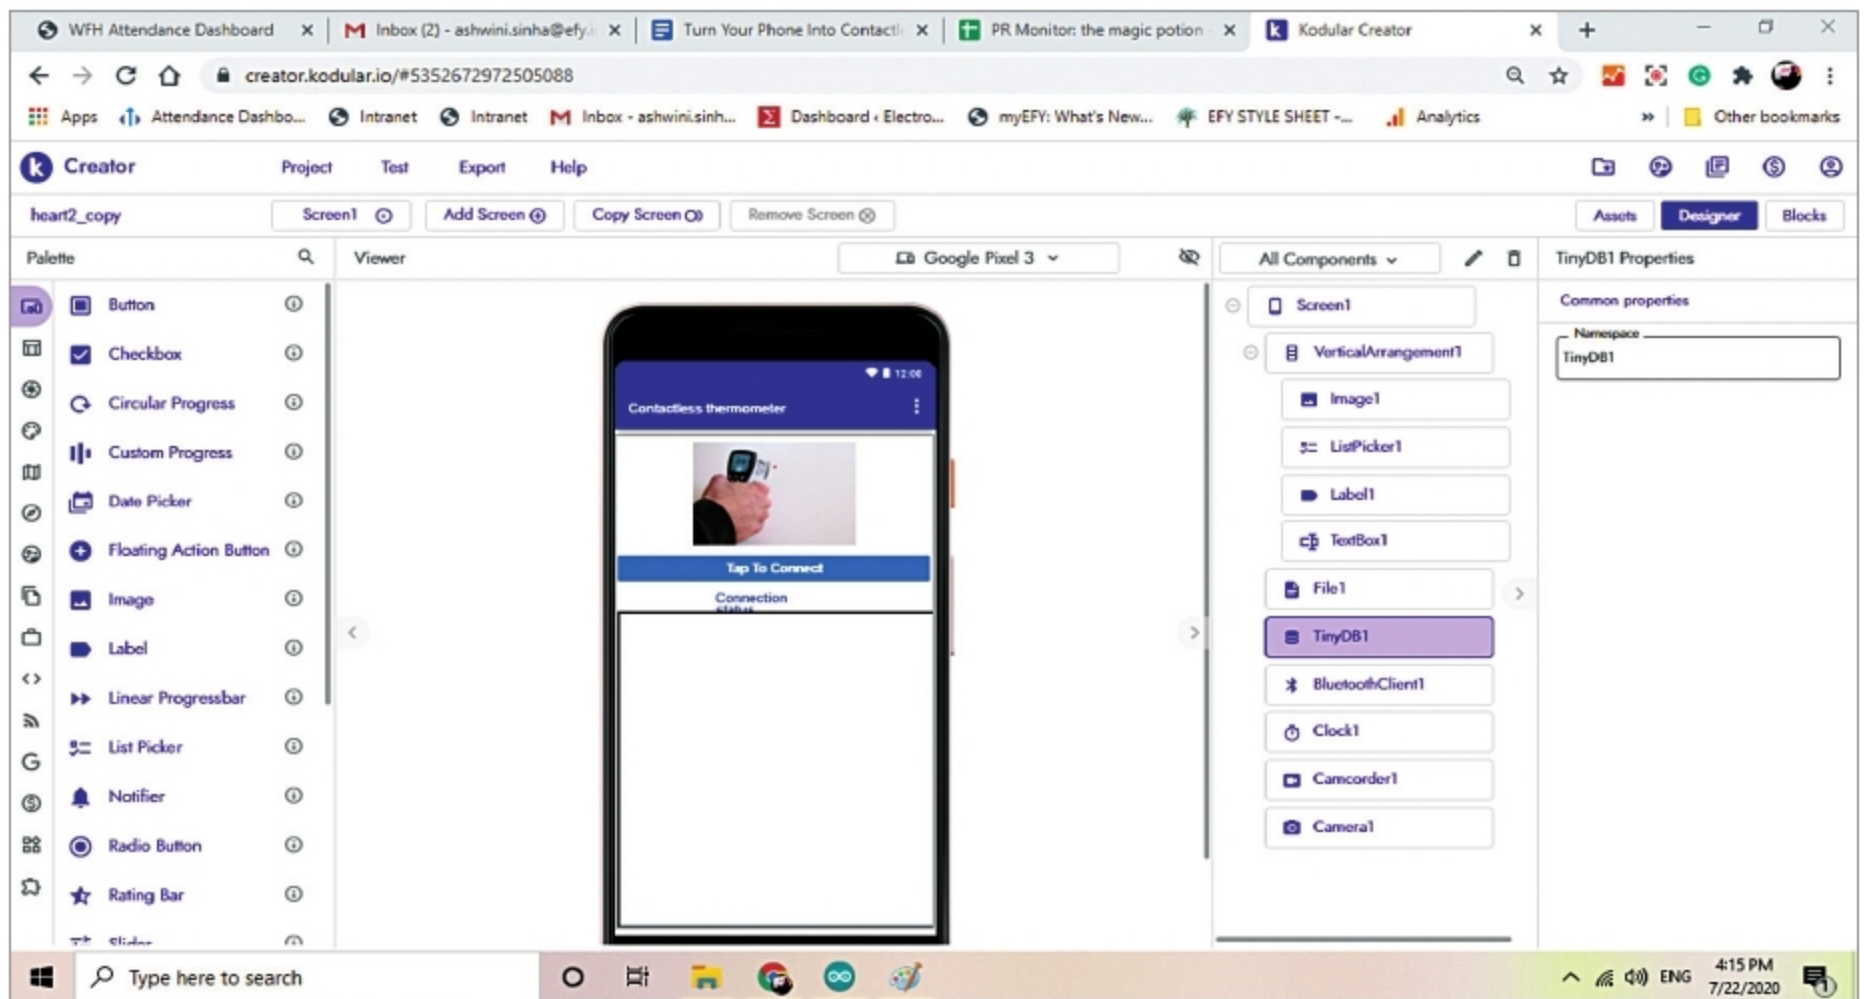


Fig. 4: App layout in Kodular platform

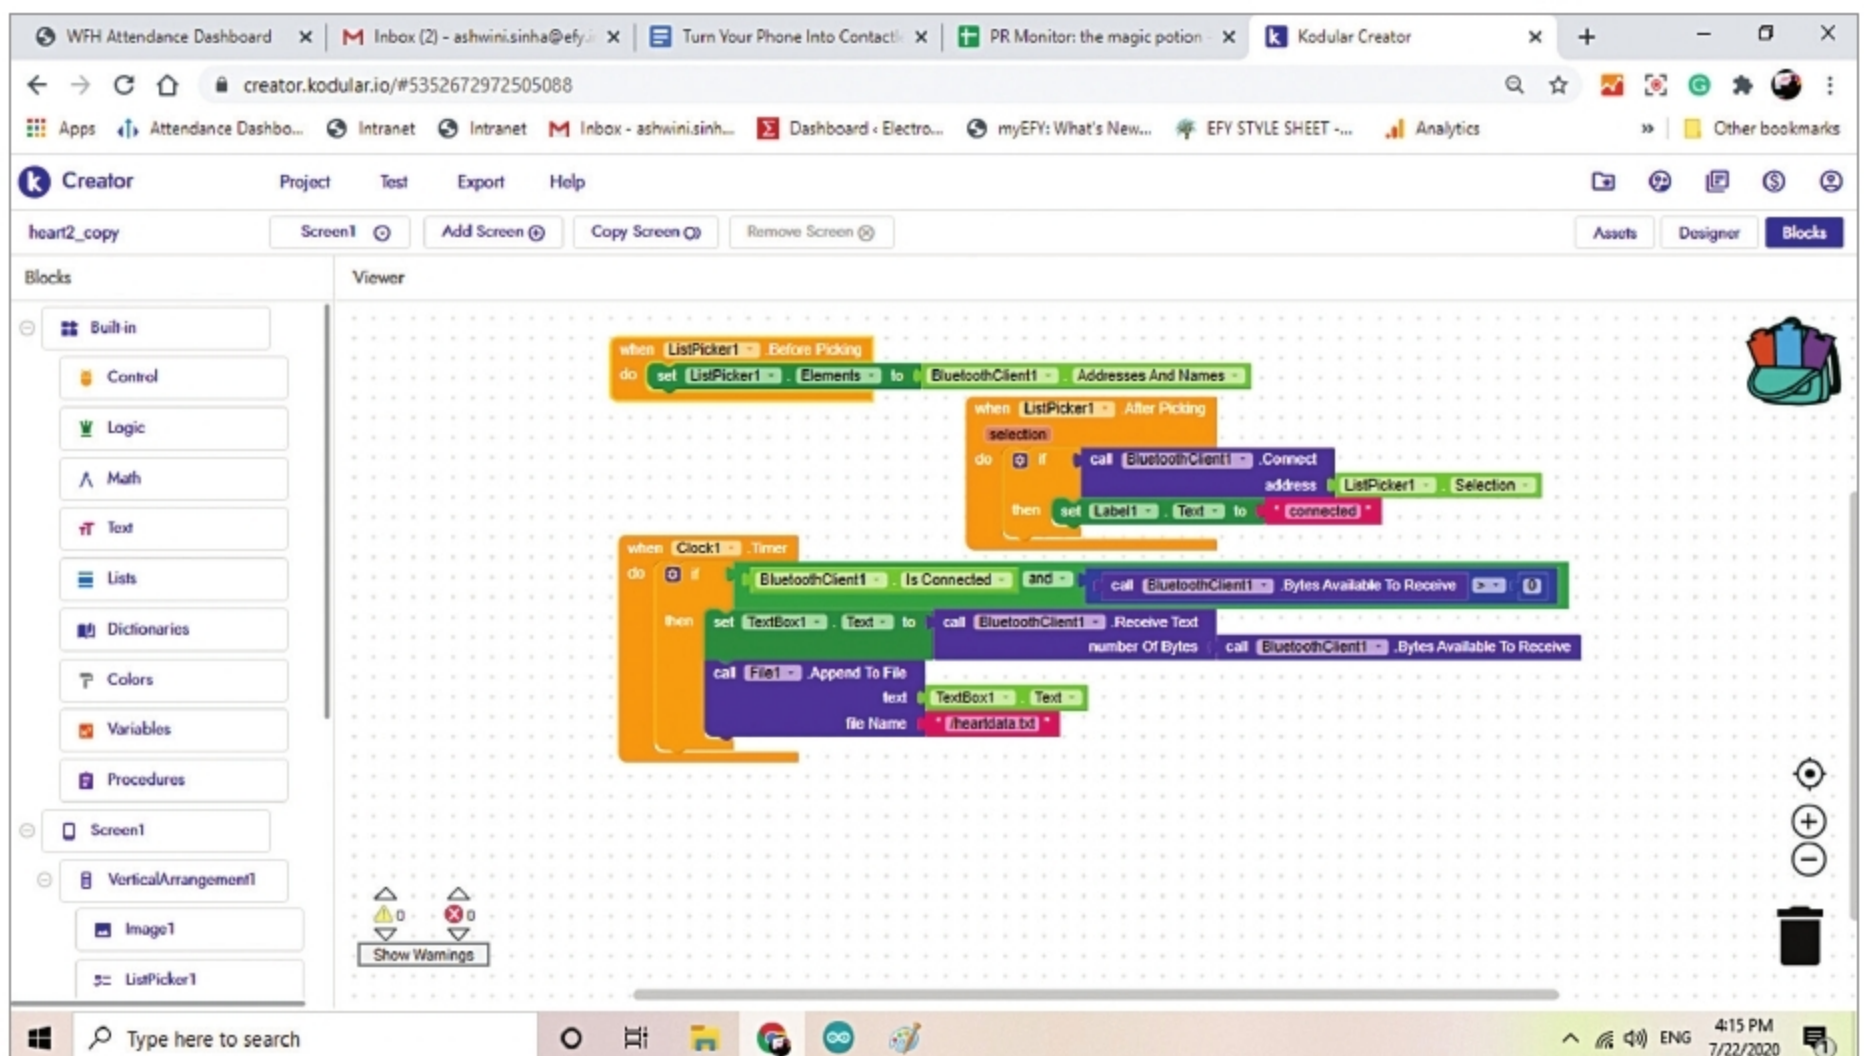


Fig. 5: Coding in Blocks section

the sensor readings and pass them to the `serial.println()` function (refer Fig. 2) so that when you connect the Bluetooth to the serial pin of Arduino, it transfers those readings to the Bluetooth module. You can also add an OLED display, but it is optional.

Connections

Next, make the connections as shown in Fig. 3. Make sure you connect power supply using a 9V PP3 battery. Positive wire of battery should connect to RAW pin and negative wire should connect to GND pin of Arduino

Pro Mini. After this, make an app for Bluetooth communications through which you will get live readings on your phone.

Android app development

To make an app, you can use app crea-