


R5 / shaped luminous gripping faces

Four-petal orthographic form study | all four at the same scale | no head or drive assembly

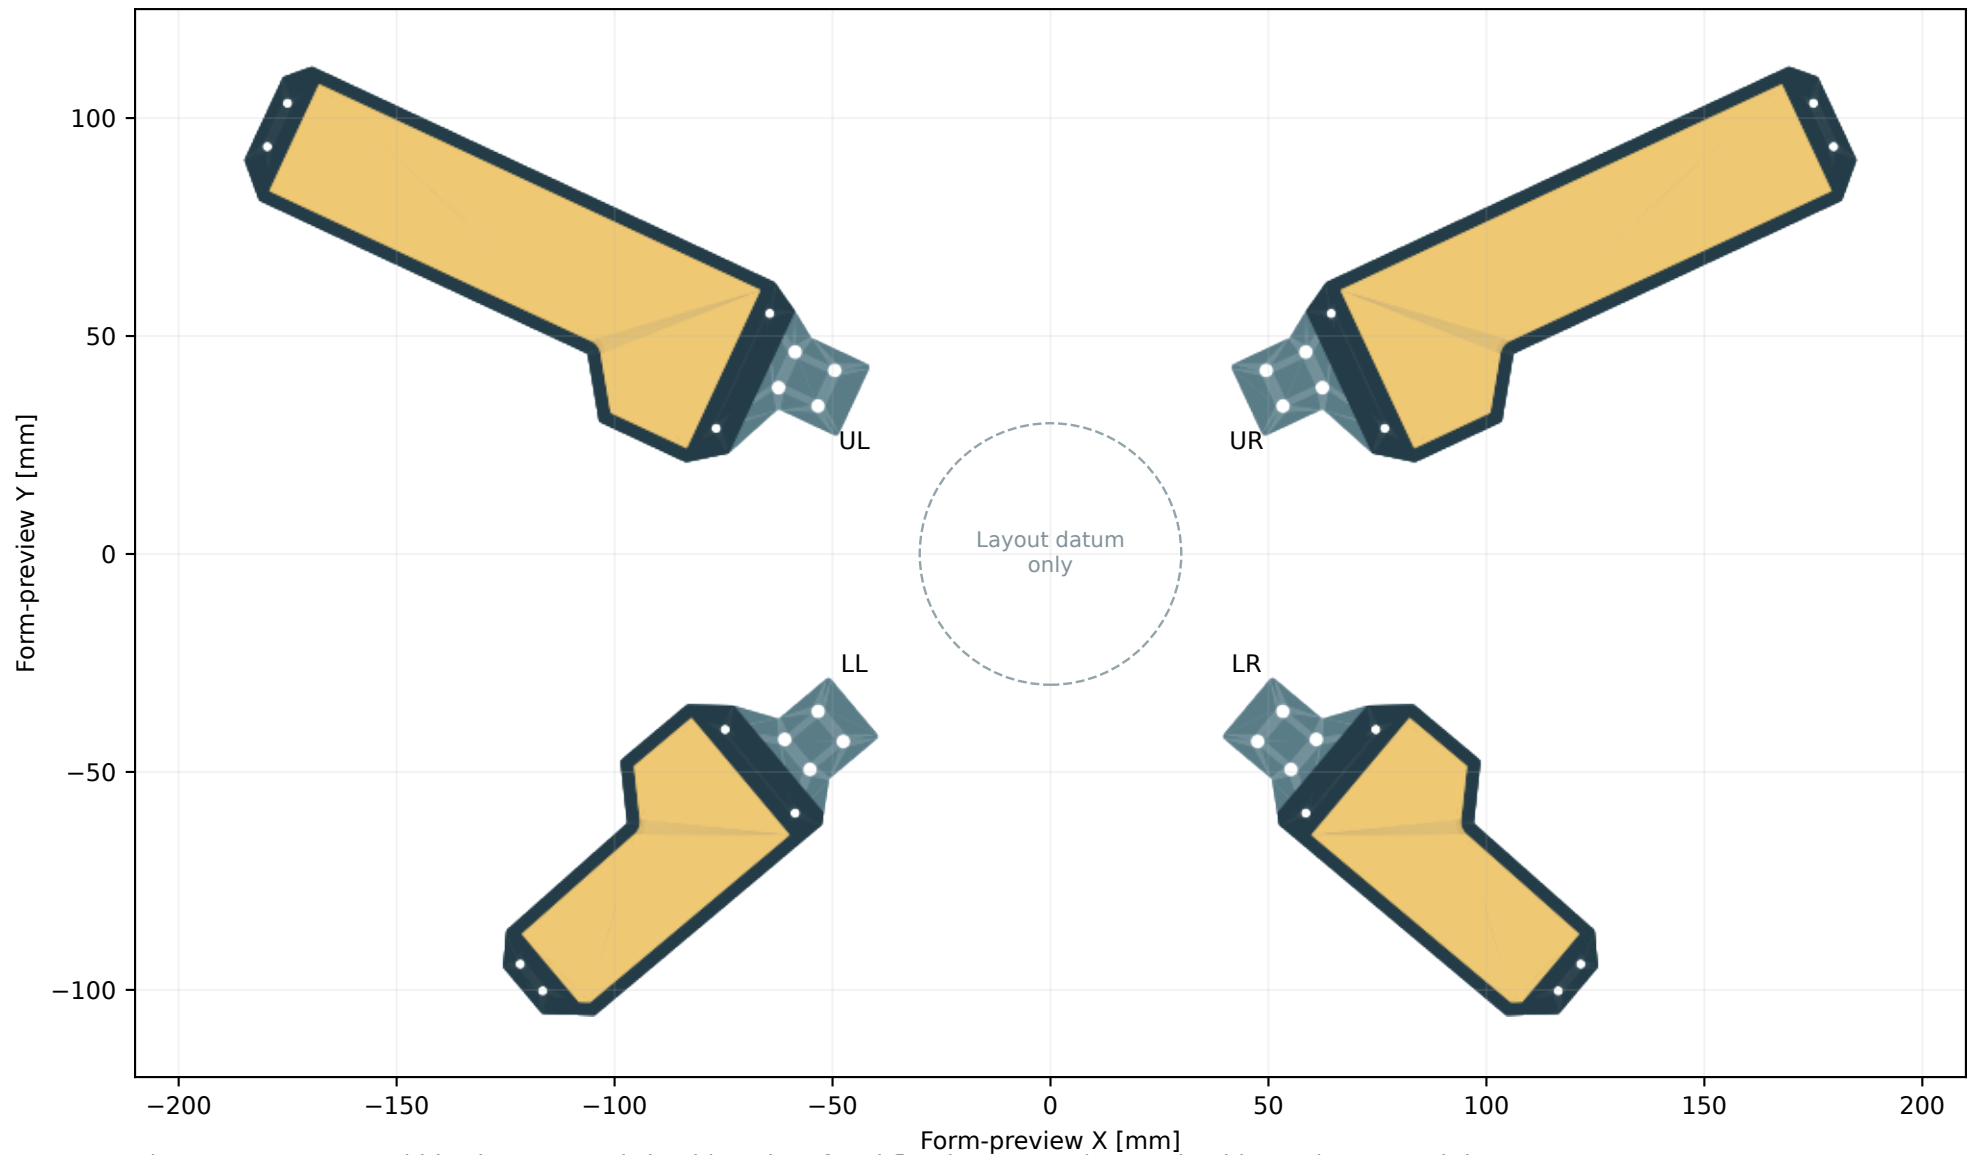


Upper: long near-constant-width wing, stepped shoulder, chamfered flat tip. Lower: shorter shoulder and truncated tip.

Gold area is the compliant illuminated contact face. Left-hand shapes are real mirror parts; conductive PCBs are not mirrored.


Contour parameters / right-hand parts

UPPER

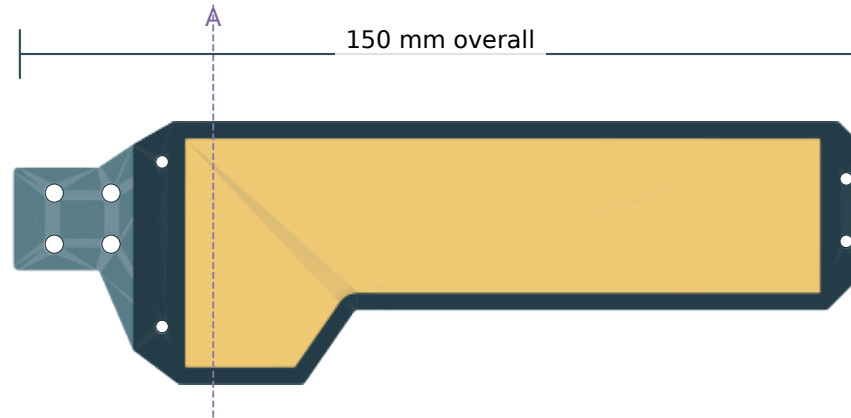

Width 46.0
Root 18.0
Stack 9.5
4 x D3.2 root
4 x D2.2 bezel
D4.2 x90deg CSK



LOWER

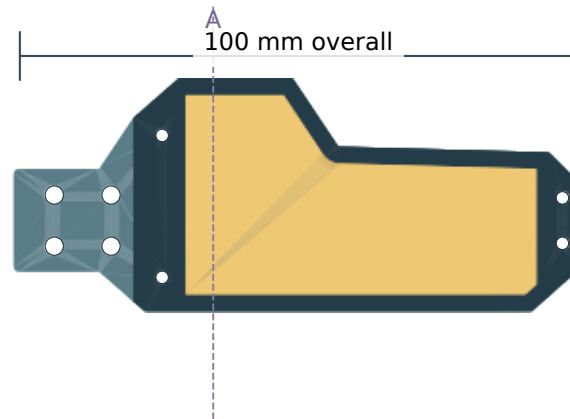

Width 41.0
Root 18.0
Stack 9.5
4 x D3.2 root
4 x D2.2 bezel
D4.2 x90deg CSK

Nominal contour corner R0.8. Shoulder stations and all contour vertices are in parameters.json / profiles.dxf.
Root holes are candidate flat-interface bores, not a released hinge. Fasteners, fits and process radii require review.

Luminous face load path / nominal sections

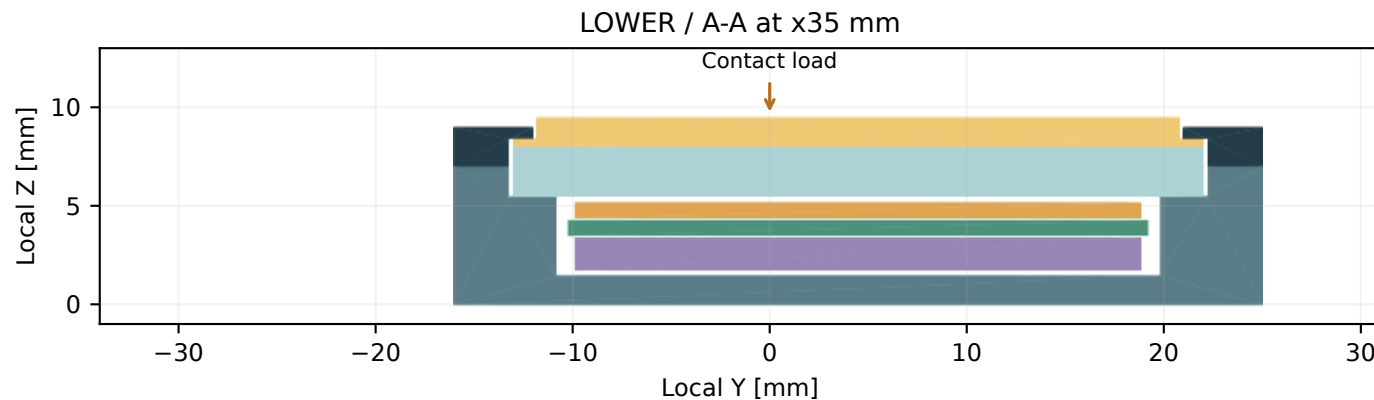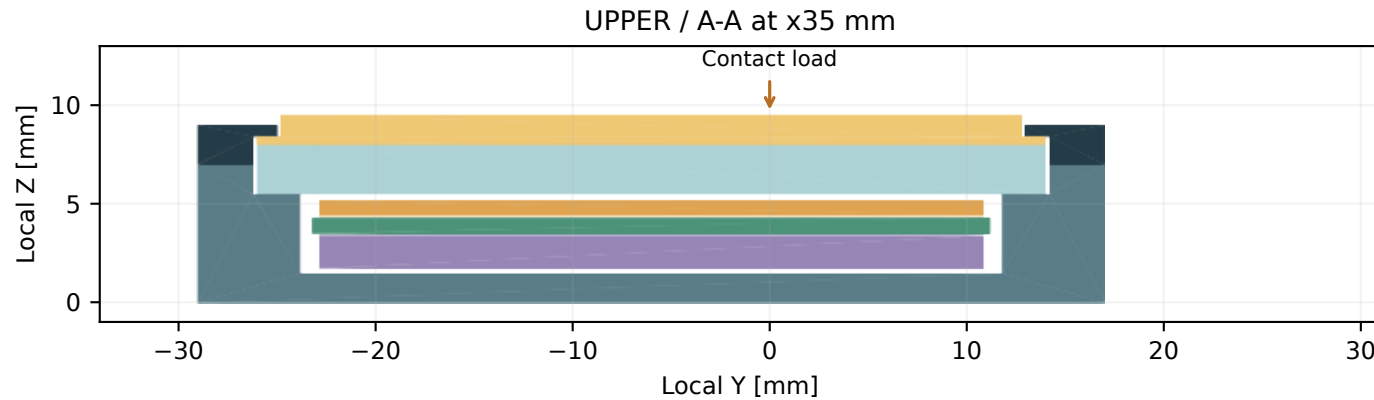

Z stack [mm]

9.5 compliant contact surface

9.0 metal bezel front

8.4 captured skin flange

8.0 PC cover front

5.5 cover support shelf

5.2 LED envelope limit

4.3 PCB top / 3.5 bottom

1.75 back-component limit

1.5 integral floor top

0.0 frame back

Object -> skin -> PC cover

-> perimeter shelf -> frame

-> candidate root attachment

Electronics carry no intended gripping reaction. Clearances are nominal and undeformed.

Transparent cover spans the electronic cavity and seats on a continuous perimeter ledge. Skin is mechanically captured.
No friction, stiffness, fatigue, optical uniformity, closed-state contact or 1-second motion qualification is claimed.