


A16-C03-root-front-holder


A16 root-cover addon | mm | supported, unpowered, unloaded FIT ONLY

XY all edges; hidden included

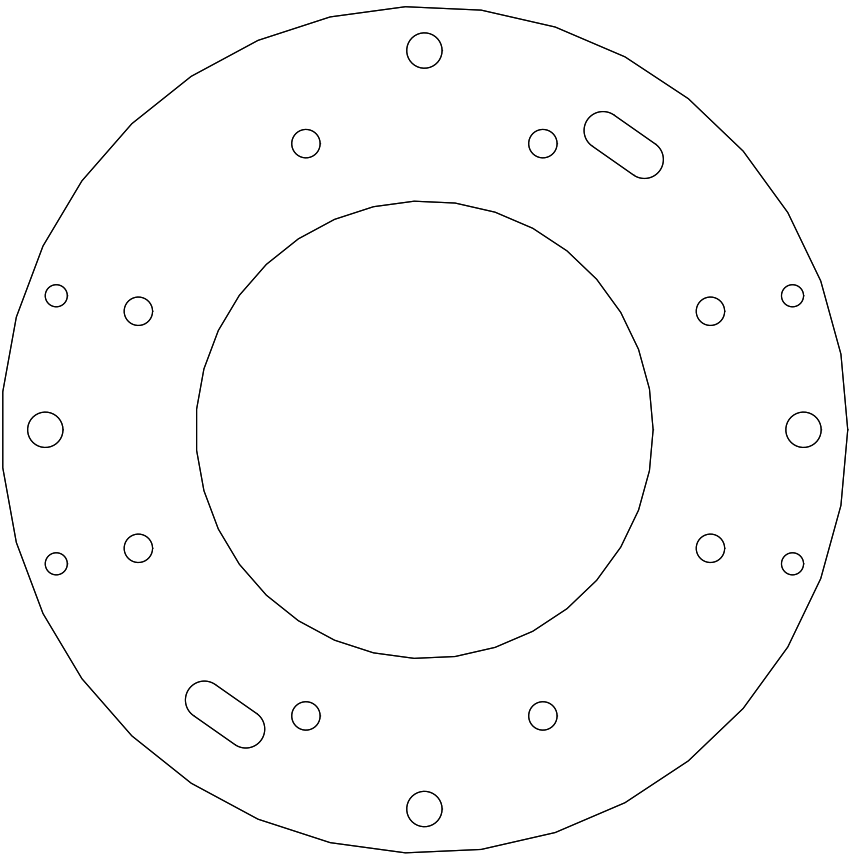


Overall 134.000 x134.000; scale0.836

XZ all edges; hidden included



Overall 134.000 x6.000; scale0.836

YZ all edges; hidden included



Overall 134.000 x6.000; scale0.836

4xD3.5 atR62;20/160/200/340deg. X=+/-58.2609,Y=+/-21.2052; source CAD is authoritative.

R102 plateZ-2.5..3.5; tabsZ4..7,3thick; washer fills0.5 gap. Two tabs per half, straight8-wide strips.

4xM3x16 +8xDIN125 OD7/ID3.2/H0.5 washers +4xM3 nuts AF5.5/H2.4. No plastic tapped threads.

Old R102 and two C02 root skins are replaced; do not stack/install duplicate source parts.

Cowl bottomJ1Z-89.8 /worldZ75.2; B06 neck topZ74. Nominal vertical service seam1.2mm.

Nominal trial linear +/-0.2 after coupons. Motor/base mounts and wire slots retain current source dimensions.


New screw grip9.5+head washer0.5; nutZ-4.9..-2.5, screw tipZ-8.5. Retention/load/thermal not qualified.

STEP and STL supplied for fit. Inspect internal supports, washer seats, actual tools and manual removal.

A16-C03-root-cowl-a


A16 root-cover addon | mm | supported, unpowered, unloaded FIT ONLY

XY all edges; hidden included

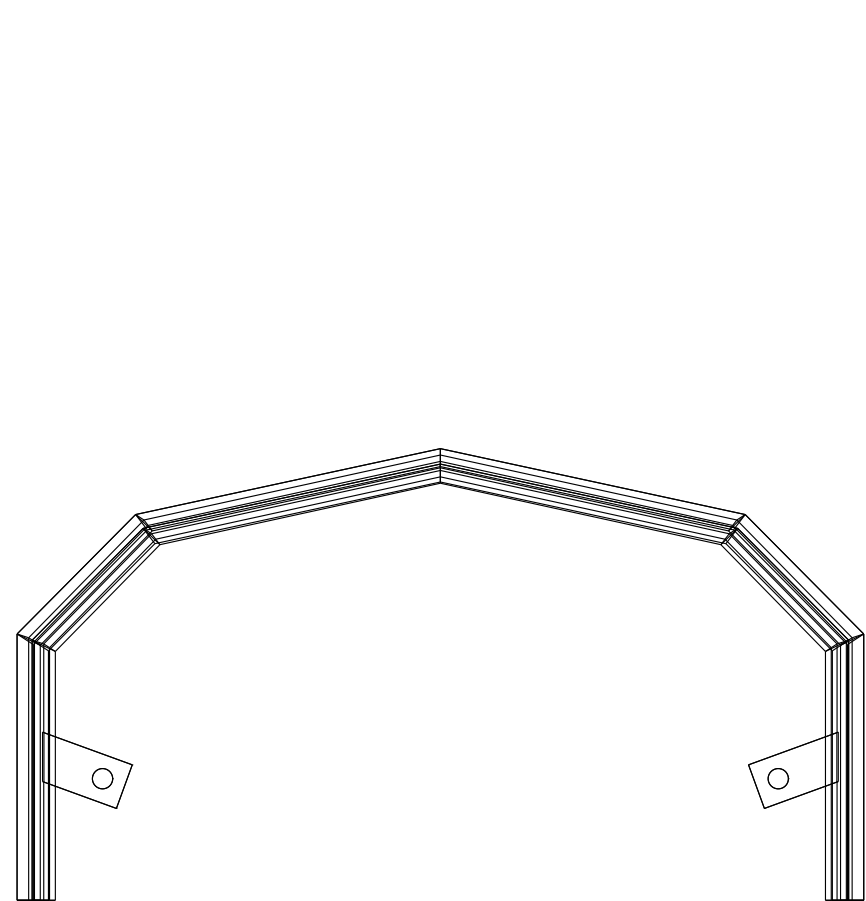


Overall 146.000 x77.850; scale0.767

XZ all edges; hidden included

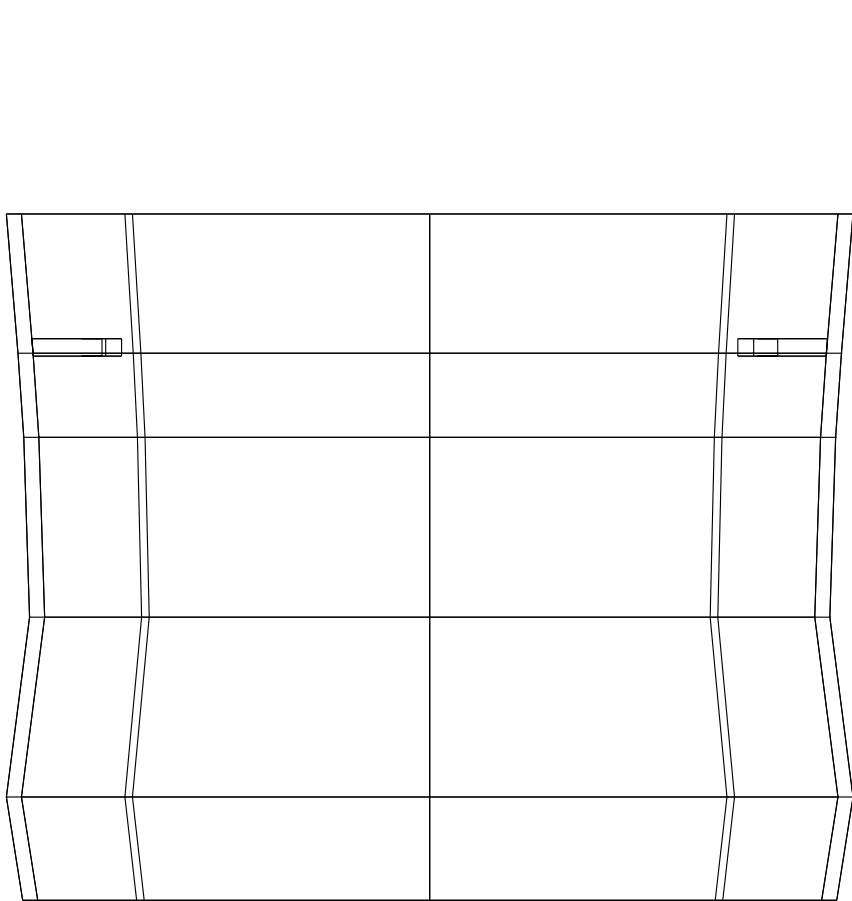

Overall 146.000 x118.300; scale0.767

YZ all edges; hidden included

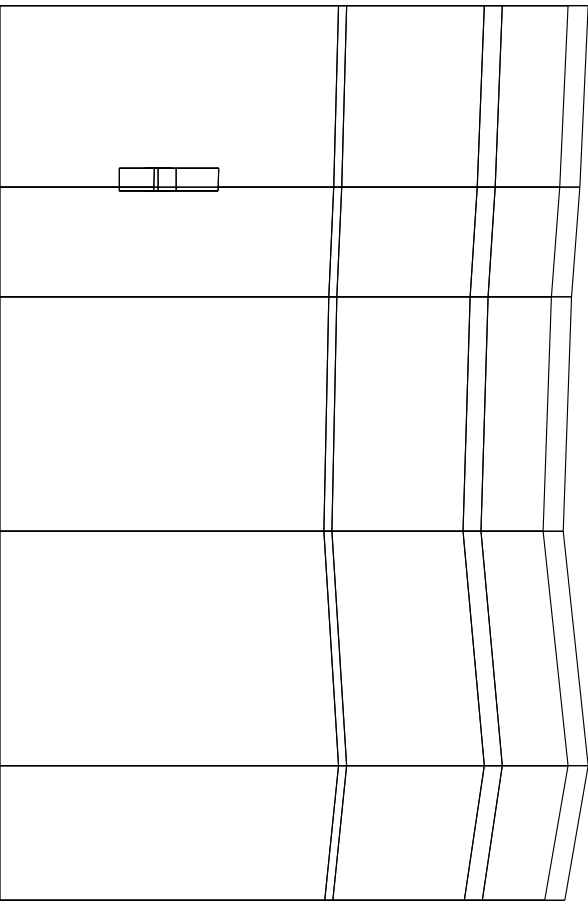

Overall 77.850 x118.300; scale1.000

4xD3.5 atR62;20/160/200/340deg. X=+/-58.2609,Y=+/-21.2052; source CAD is authoritative.

R102 plateZ-2.5..3.5; tabsZ4..7,3thick; washer fills0.5 gap. Two tabs per half, straight8-wide strips.

4xM3x16 +8xDIN125 OD7/ID3.2/H0.5 washers +4xM3 nuts AF5.5/H2.4. No plastic tapped threads.

Old R102 and two C02 root skins are replaced; do not stack/install duplicate source parts.

Cowl bottomJ1Z-89.8 /worldZ75.2; B06 neck topZ74. Nominal vertical service seam1.2mm.

Nominal trial linear +/-0.2 after coupns. Motor/base mounts and wire slots retain current source dimensions.


New screw grip9.5+head washer0.5; nutZ-4.9..-2.5, screw tipZ-8.5. Retention/load/thermal not qualified.

STEP and STL supplied for fit. Inspect internal supports, washer seats, actual tools and manual removal.

A16-C03-root-cowl-b


A16 root-cover addon | mm | supported, unpowered, unloaded FIT ONLY

XY all edges; hidden included

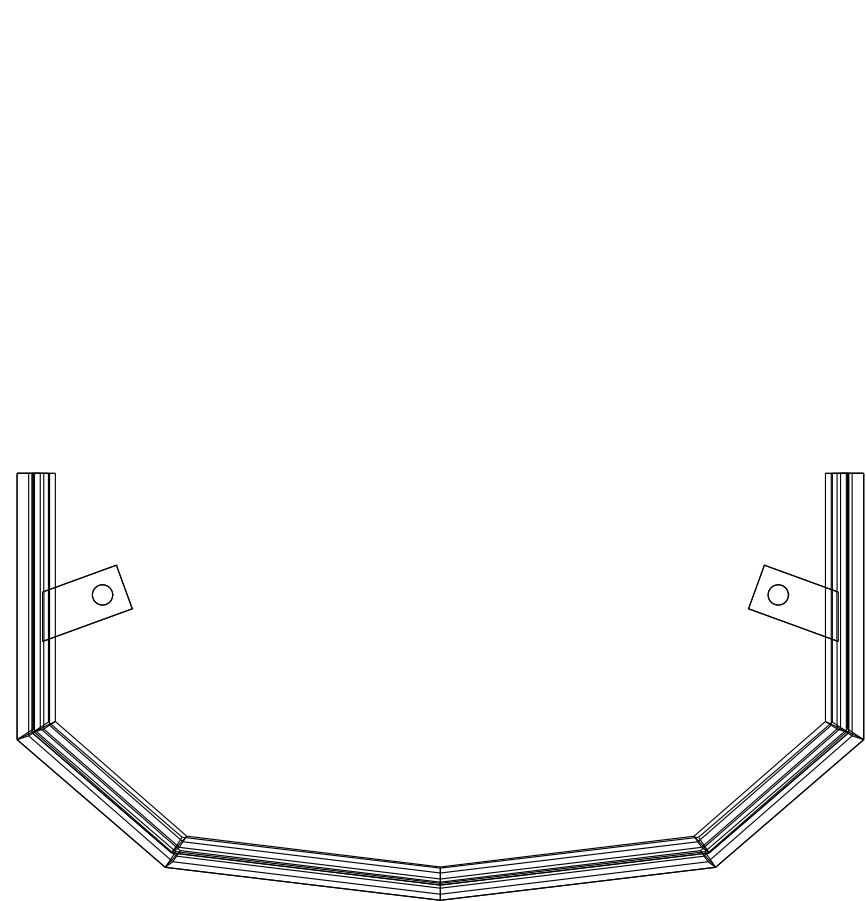


Overall 146.000 x73.590; scale0.767

XZ all edges; hidden included

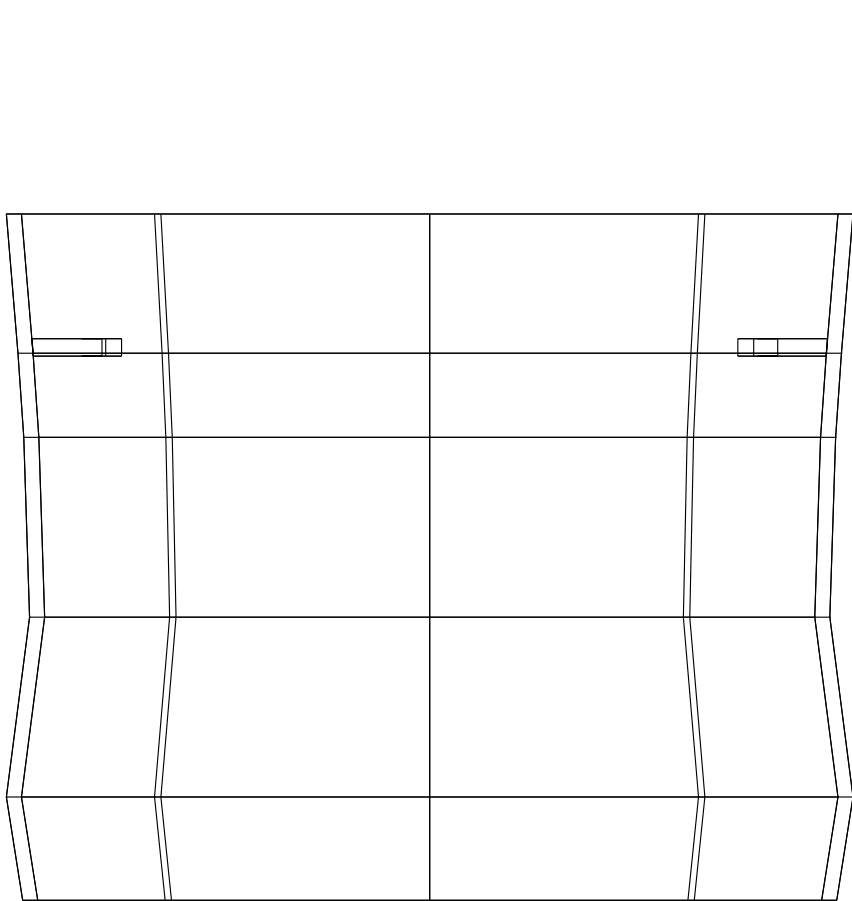

Overall 146.000 x118.300; scale0.767

YZ all edges; hidden included

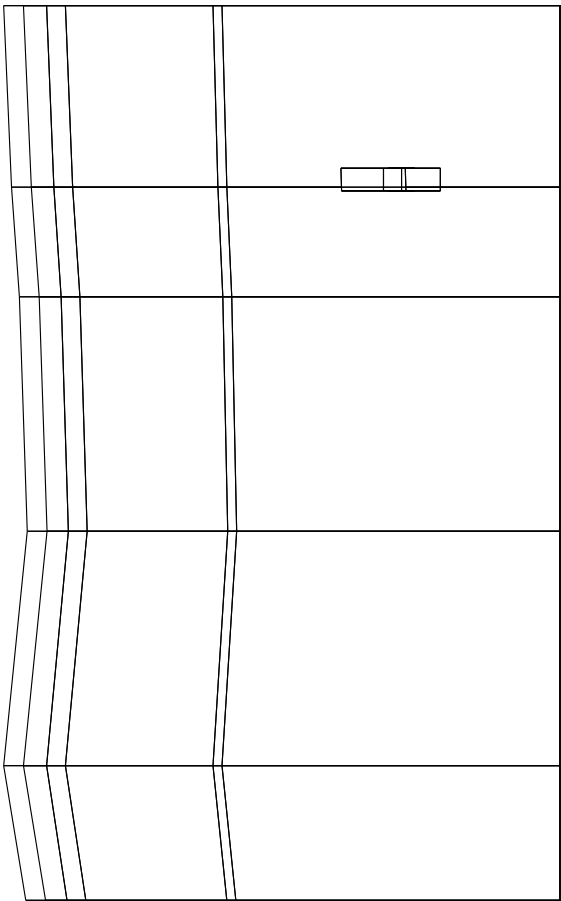

Overall 73.590 x118.300; scale1.000

4xD3.5 atR62;20/160/200/340deg. X=+/-58.2609,Y=+/-21.2052; source CAD is authoritative.

R102 plateZ-2.5..3.5; tabsZ4..7,3thick; washer fills0.5 gap. Two tabs per half, straight8-wide strips.

4xM3x16 +8xDIN125 OD7/ID3.2/H0.5 washers +4xM3 nuts AF5.5/H2.4. No plastic tapped threads.

Old R102 and two C02 root skins are replaced; do not stack/install duplicate source parts.

Cowl bottomJ1Z-89.8 /worldZ75.2; B06 neck topZ74. Nominal vertical service seam1.2mm.

Nominal trial linear +/-0.2 after coupons. Motor/base mounts and wire slots retain current source dimensions.

New screw grip9.5+head washer0.5; nutZ-4.9..-2.5, screw tipZ-8.5. Retention/load/thermal not qualified.

STEP and STL supplied for fit. Inspect internal supports, washer seats, actual tools and manual removal.