


A16-C06-upper-saddle-115-dorsal

mm | NOMINAL FIT ONLY | supported, unpowered, unloaded | original CAD axes

XY all edges, hidden included




Overall8.000 x38.000; scale1.000

XZ all edges, hidden included



Overall8.000 x26.848; scale1.000

YZ all edges, hidden included



Overall38.000 x26.848; scale1.000

STEP defines complete nominal geometry; native holes retained. mount-table.csv lists added centres/axes.

Heat-set pilotsD4.0; genuine ruthexRX-M3x5.7 /RX-M3Sx4.0,maximumOD4.6. Calibrate first.

See mount-table.csv: exact fixing centre/axis andmanifest for screw length, insert length and grip.

Replacement parts only: never stack old bracket or old cowl. Base and motor native datums unchanged.

Trial printed linear +/-0.2 after coupon calibration; inspect washer seating and de-support internal ears.

Source dimensions, thread engagement and hardware envelopes do not certify plastic retention or metal GD&T.

Three named static poses and empty straight hex-key space only; motion, actual tools and load not released.

A16-C06-upper-saddle-115-ventral

mm | NOMINAL FIT ONLY | supported, unpowered, unloaded | original CAD axes

XY all edges, hidden included




Overall8.000 x38.000; scale1.000

XZ all edges, hidden included



Overall8.000 x25.152; scale1.000

YZ all edges, hidden included



Overall38.000 x25.152; scale1.000

STEP defines complete nominal geometry; native holes retained. mount-table.csv lists added centres/axes.

Heat-set pilotsD4.0; genuine ruthexRX-M3x5.7 /RX-M3Sx4.0,maximumOD4.6. Calibrate first.

See mount-table.csv: exact fixing centre/axis andmanifest for screw length, insert length and grip.

Replacement parts only: never stack old bracket or old cowl. Base and motor native datums unchanged.

Trial printed linear +/-0.2 after coupon calibration; inspect washer seating and de-support internal ears.

Source dimensions, thread engagement and hardware envelopes do not certify plastic retention or metal GD&T.

Three named static poses and empty straight hex-key space only; motion, actual tools and load not released.

A16-C06-upper-saddle-200-dorsal

mm | NOMINAL FIT ONLY | supported, unpowered, unloaded | original CAD axes


XY all edges, hidden included

XZ all edges, hidden included


YZ all edges, hidden included



Overall8.000 x38.000; scale1.000



Overall8.000 x26.311; scale1.000



Overall38.000 x26.311; scale1.000

STEP defines complete nominal geometry; native holes retained. mount-table.csv lists added centres/axes.

Heat-set pilotsD4.0; genuine ruthexRX-M3x5.7 /RX-M3Sx4.0,maximumOD4.6. Calibrate first.

See mount-table.csv: exact fixing centre/axis andmanifest for screw length, insert length and grip.

Replacement parts only: never stack old bracket or old cowl. Base and motor native datums unchanged.

Trial printed linear +/-0.2 after coupon calibration; inspect washer seating and de-support internal ears.


Source dimensions, thread engagement and hardware envelopes do not certify plastic retention or metal GD&T.

Three named static poses and empty straight hex-key space only; motion, actual tools and load not released.

A16-C06-upper-saddle-200-ventral


mm | NOMINAL FIT ONLY | supported, unpowered, unloaded | original CAD axes

XY all edges, hidden included




Overall8.000 x38.000; scale1.000

XZ all edges, hidden included



Overall8.000 x24.644; scale1.000

YZ all edges, hidden included



Overall38.000 x24.644; scale1.000

STEP defines complete nominal geometry; native holes retained. mount-table.csv lists added centres/axes.

Heat-set pilotsD4.0; genuine ruthexRX-M3x5.7 /RX-M3Sx4.0,maximumOD4.6. Calibrate first.

See mount-table.csv: exact fixing centre/axis andmanifest for screw length, insert length and grip.

Replacement parts only: never stack old bracket or old cowl. Base and motor native datums unchanged.

Trial printed linear +/-0.2 after coupon calibration; inspect washer seating and de-support internal ears.


Source dimensions, thread engagement and hardware envelopes do not certify plastic retention or metal GD&T.

Three named static poses and empty straight hex-key space only; motion, actual tools and load not released.

A16-C06-upper-dorsal


mm | NOMINAL FIT ONLY | supported, unpowered, unloaded | original CAD axes

XY all edges, hidden included

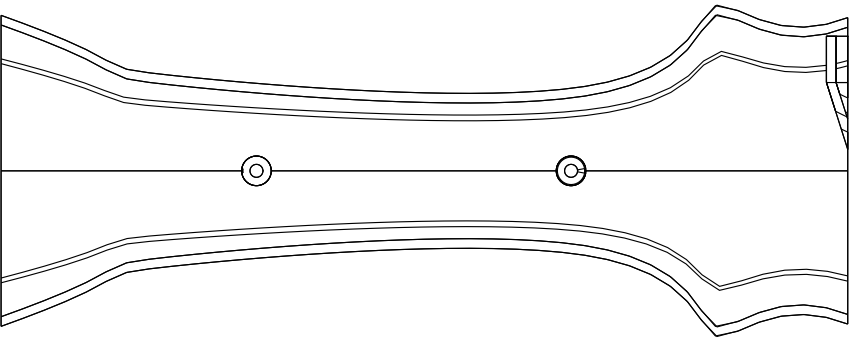


Overall228.750 x89.660; scale0.490

XZ all edges, hidden included

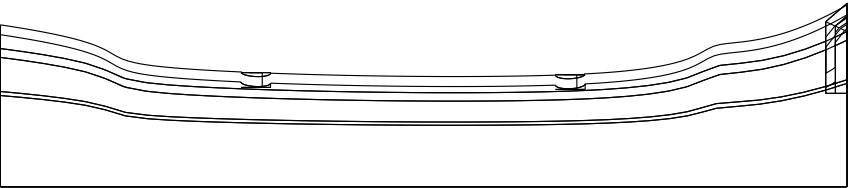

Overall228.750 x49.549; scale0.490

YZ all edges, hidden included

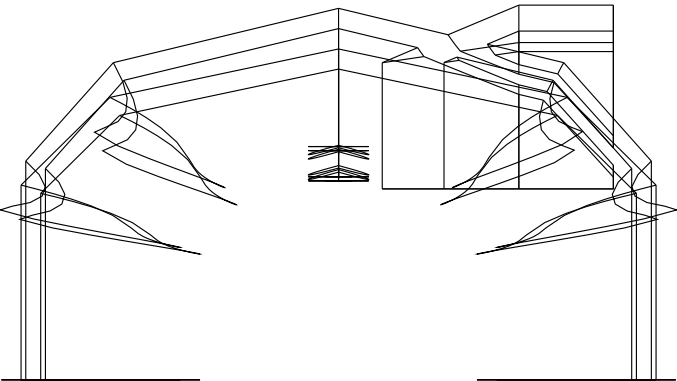

Overall89.660 x49.549; scale1.000

STEP defines complete nominal geometry; native holes retained. mount-table.csv lists added centres/axes.

Heat-set pilotsD4.0; genuine ruthexRX-M3x5.7 /RX-M3Sx4.0,maximumOD4.6. Calibrate first.

See mount-table.csv: exact fixing centre/axis andmanifest for screw length, insert length and grip.

Replacement parts only: never stack old bracket or old cowl. Base and motor native datums unchanged.

Trial printed linear +/-0.2 after coupon calibration; inspect washer seating and de-support internal ears.


Source dimensions, thread engagement and hardware envelopes do not certify plastic retention or metal GD&T.

Three named static poses and empty straight hex-key space only; motion, actual tools and load not released.

A16-C06-upper-ventral

mm | NOMINAL FIT ONLY | supported, unpowered, unloaded | original CAD axes

XY all edges, hidden included

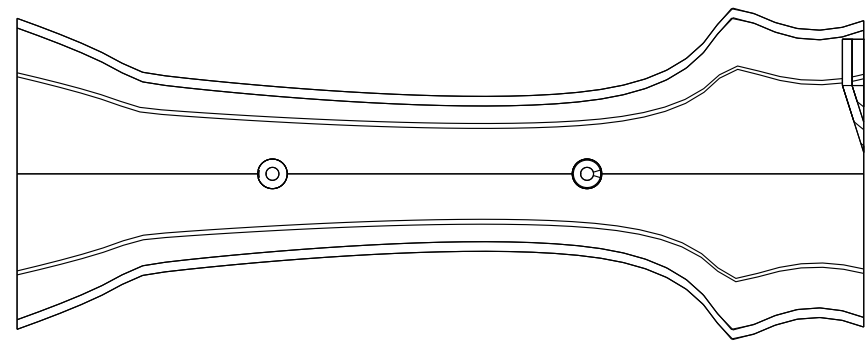


Overall228.750 x89.660; scale0.490

XZ all edges, hidden included



Overall228.750 x50.388; scale0.490

YZ all edges, hidden included

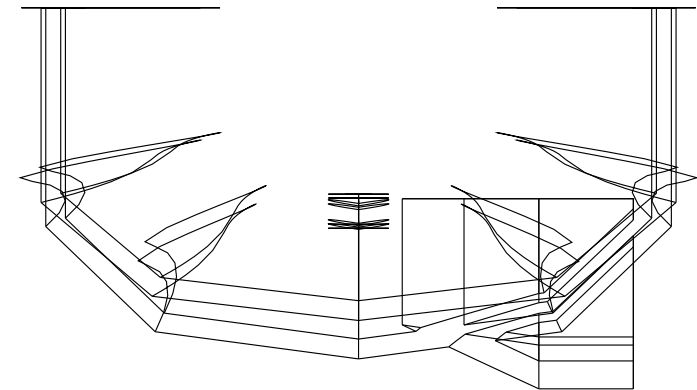

Overall89.660 x50.388; scale1.000

STEP defines complete nominal geometry; native holes retained. mount-table.csv lists added centres/axes.

Heat-set pilotsD4.0; genuine ruthexRX-M3x5.7 /RX-M3Sx4.0,maximumOD4.6. Calibrate first.

See mount-table.csv: exact fixing centre/axis andmanifest for screw length, insert length and grip.

Replacement parts only: never stack old bracket or old cowl. Base and motor native datums unchanged.

Trial printed linear +/-0.2 after coupon calibration; inspect washer seating and de-support internal ears.

Source dimensions, thread engagement and hardware envelopes do not certify plastic retention or metal GD&T.

Three named static poses and empty straight hex-key space only; motion, actual tools and load not released.


A16-C06-fore-spine-and-J5-ring

mm | NOMINAL FIT ONLY | supported, unpowered, unloaded | original CAD axes


XY all edges, hidden included

XZ all edges, hidden included


YZ all edges, hidden included

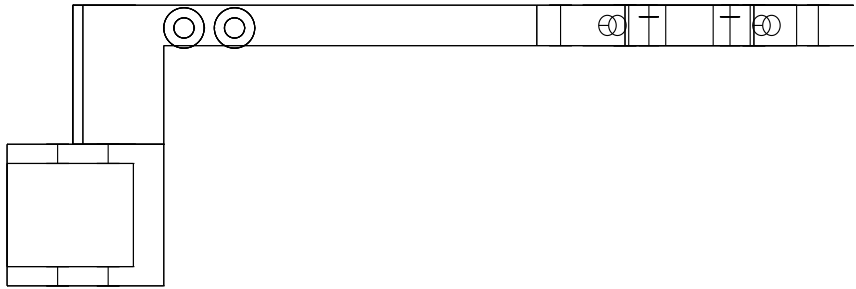

Overall167.500 x55.500; scale0.669

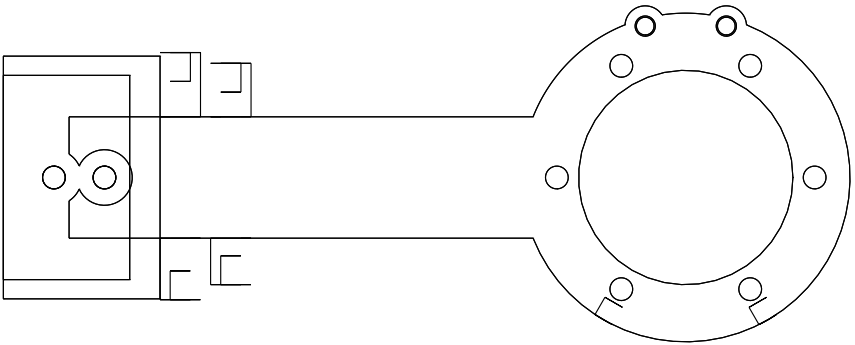

Overall167.500 x66.444; scale0.669

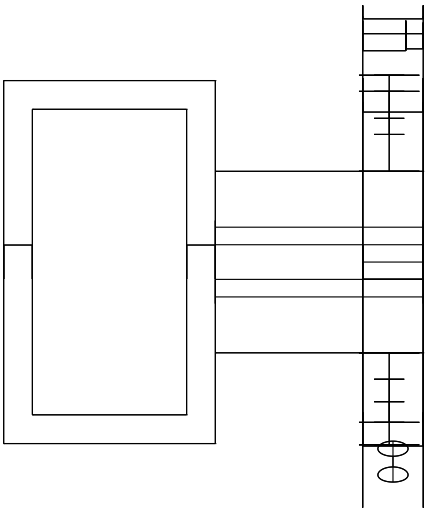

Overall55.500 x66.444; scale1.000

STEP defines complete nominal geometry; native holes retained. mount-table.csv lists added centres/axes.

Heat-set pilotsD4.0; genuine ruthexRX-M3x5.7 /RX-M3Sx4.0,maximumOD4.6. Calibrate first.

See mount-table.csv: exact fixing centre/axis andmanifest for screw length, insert length and grip.

Replacement parts only: never stack old bracket or old cowl. Base and motor native datums unchanged.

Trial printed linear +/-0.2 after coupon calibration; inspect washer seating and de-support internal ears.


Source dimensions, thread engagement and hardware envelopes do not certify plastic retention or metal GD&T.

Three named static poses and empty straight hex-key space only; motion, actual tools and load not released.

A16-C06-fore-dorsal


mm | NOMINAL FIT ONLY | supported, unpowered, unloaded | original CAD axes

XY all edges, hidden included

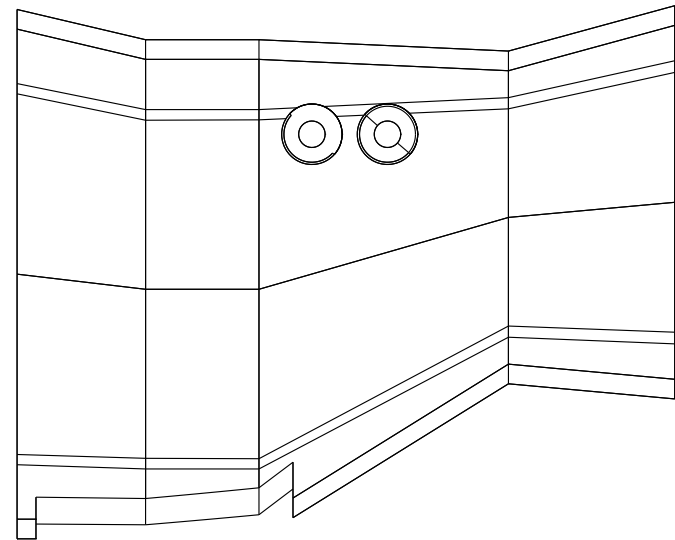


Overall87.000 x70.500; scale1.000

XZ all edges, hidden included

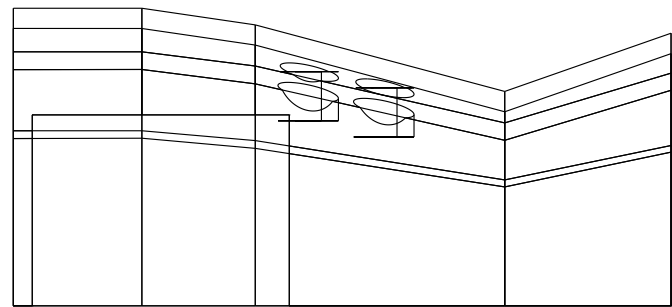

Overall87.000 x39.350; scale1.000

YZ all edges, hidden included

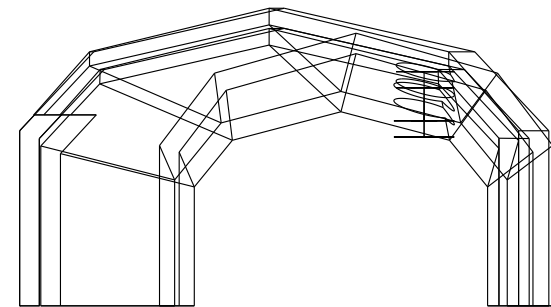

Overall70.500 x39.350; scale1.000

STEP defines complete nominal geometry; native holes retained. mount-table.csv lists added centres/axes.

Heat-set pilotsD4.0; genuine ruthexRX-M3x5.7 /RX-M3Sx4.0,maximumOD4.6. Calibrate first.

See mount-table.csv: exact fixing centre/axis andmanifest for screw length, insert length and grip.

Replacement parts only: never stack old bracket or old cowl. Base and motor native datums unchanged.

Trial printed linear +/-0.2 after coupon calibration; inspect washer seating and de-support internal ears.


Source dimensions, thread engagement and hardware envelopes do not certify plastic retention or metal GD&T.

Three named static poses and empty straight hex-key space only; motion, actual tools and load not released.

A16-C06-fore-ventral


mm | NOMINAL FIT ONLY | supported, unpowered, unloaded | original CAD axes

XY all edges, hidden included

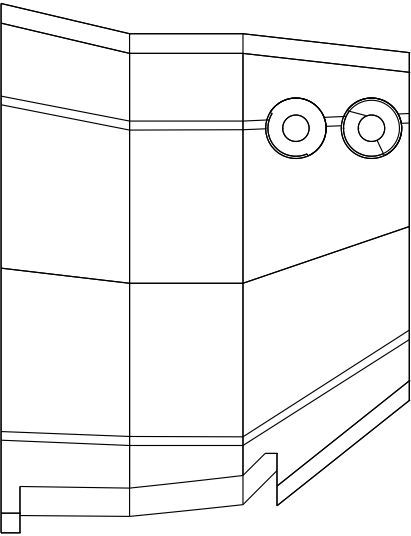


Overall54.000 x70.000; scale1.000

XZ all edges, hidden included

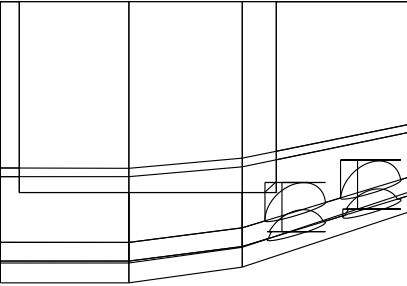

Overall54.000 x37.190; scale1.000

YZ all edges, hidden included

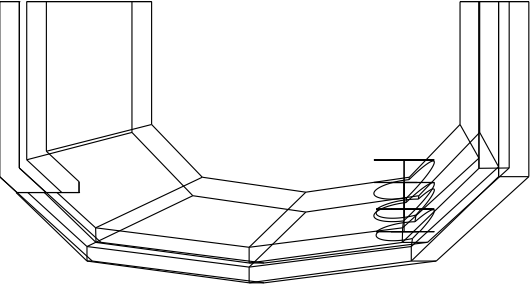

Overall70.000 x37.190; scale1.000

STEP defines complete nominal geometry; native holes retained. mount-table.csv lists added centres/axes.

Heat-set pilotsD4.0; genuine ruthexRX-M3x5.7 /RX-M3Sx4.0,maximumOD4.6. Calibrate first.

See mount-table.csv: exact fixing centre/axis andmanifest for screw length, insert length and grip.

Replacement parts only: never stack old bracket or old cowl. Base and motor native datums unchanged.

Trial printed linear +/-0.2 after coupon calibration; inspect washer seating and de-support internal ears.

Source dimensions, thread engagement and hardware envelopes do not certify plastic retention or metal GD&T.

Three named static poses and empty straight hex-key space only; motion, actual tools and load not released.