


A16-C05-J5-mount-plate


mm | NOMINAL FIT ONLY | supported, unpowered, unloaded | original CAD axes

XY all edges, hidden included

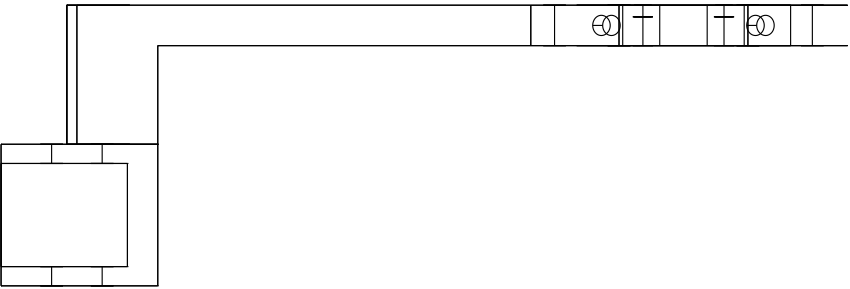


Overall167.500 x55.500; scale0.669

XZ all edges, hidden included

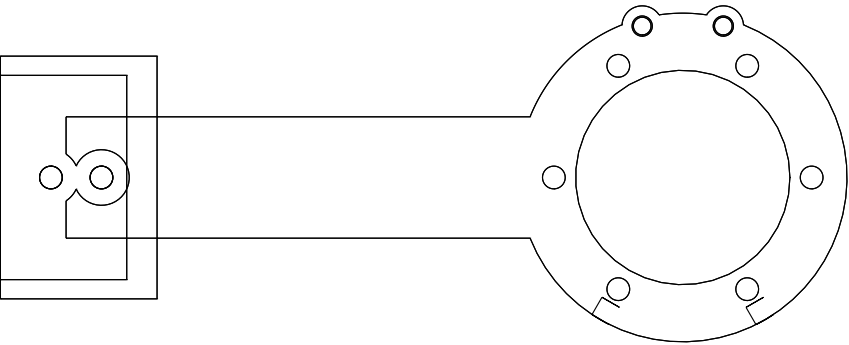

Overall167.500 x66.444; scale0.669

YZ all edges, hidden included

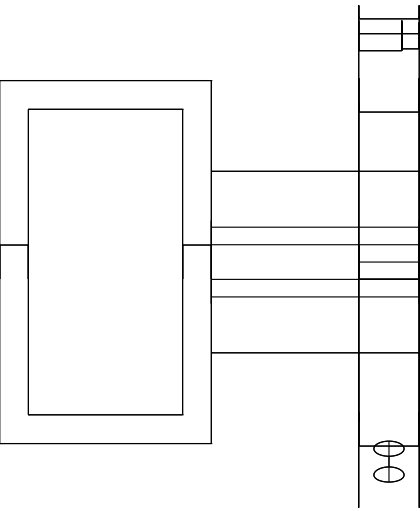

Overall55.500 x66.444; scale1.000

STEP defines complete nominal geometry; native holes retained. mount-table.csv lists added centres/axes.

Heat-set pilotsD4.0; genuine ruthexRX-M3x5.7 /RX-M3Sx4.0,maximumOD4.6. Calibrate first.

See mount-table.csv: exact fixing centre/axis andmanifest for screw length, insert length and grip.

Replacement parts only: never stack old bracket or old cowl. Base and motor native datums unchanged.

Trial printed linear +/-0.2 after coupon calibration; inspect washer seating and de-support internal ears.


Source dimensions, thread engagement and hardware envelopes do not certify plastic retention or metal GD&T.

Three named static poses and empty straight hex-key space only; motion, actual tools and load not released.

A16-C05-J5-cowl-a


mm | NOMINAL FIT ONLY | supported, unpowered, unloaded | original CAD axes

XY all edges, hidden included

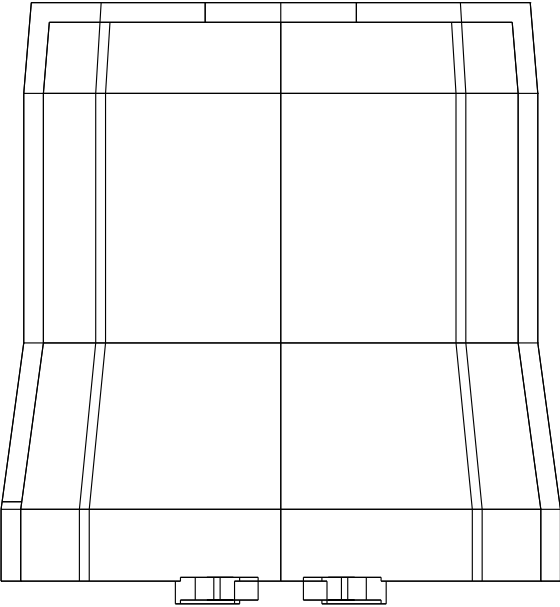


Overall74.000 x79.500; scale1.000

XZ all edges, hidden included

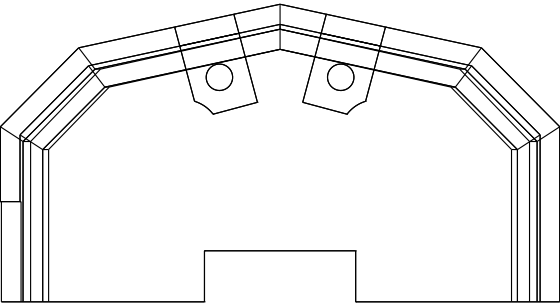

Overall74.000 x39.350; scale1.000

YZ all edges, hidden included

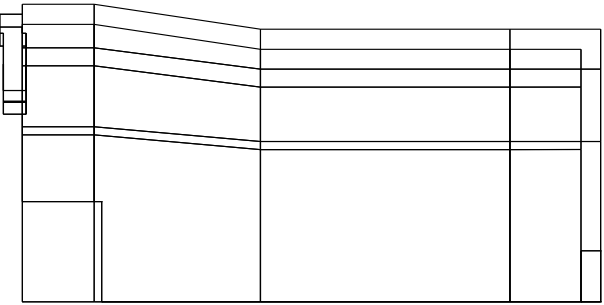

Overall79.500 x39.350; scale1.000

STEP defines complete nominal geometry; native holes retained. mount-table.csv lists added centres/axes.

Heat-set pilotsD4.0; genuine ruthexRX-M3x5.7 /RX-M3Sx4.0,maximumOD4.6. Calibrate first.

See mount-table.csv: exact fixing centre/axis andmanifest for screw length, insert length and grip.

Replacement parts only: never stack old bracket or old cowl. Base and motor native datums unchanged.

Trial printed linear +/-0.2 after coupon calibration; inspect washer seating and de-support internal ears.


Source dimensions, thread engagement and hardware envelopes do not certify plastic retention or metal GD&T.

Three named static poses and empty straight hex-key space only; motion, actual tools and load not released.

A16-C05-J5-cowl-b


mm | NOMINAL FIT ONLY | supported, unpowered, unloaded | original CAD axes

XY all edges, hidden included

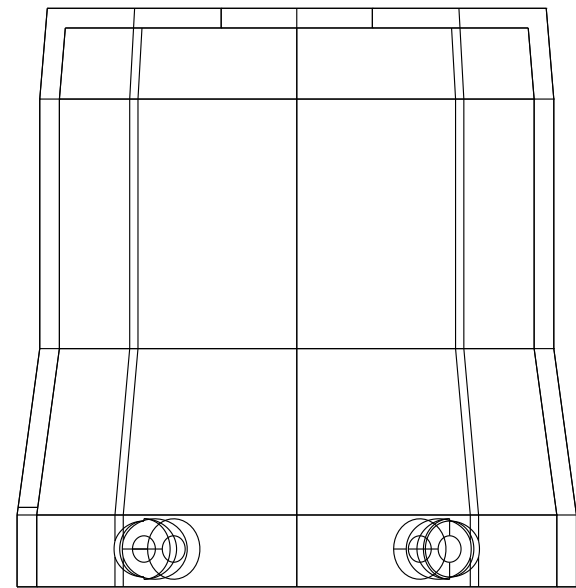


Overall74.000 x76.500; scale1.000

XZ all edges, hidden included

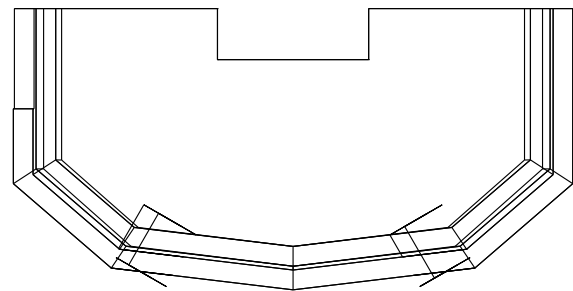

Overall74.000 x37.190; scale1.000

YZ all edges, hidden included

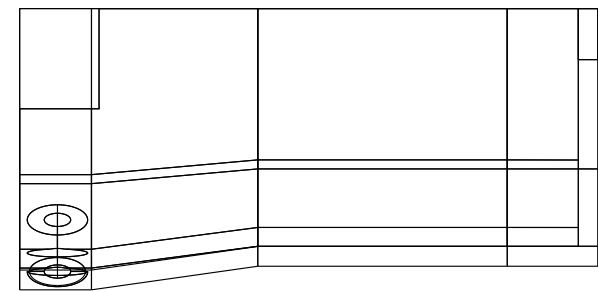

Overall76.500 x37.190; scale1.000

STEP defines complete nominal geometry; native holes retained. mount-table.csv lists added centres/axes.

Heat-set pilotsD4.0; genuine ruthexRX-M3x5.7 /RX-M3Sx4.0,maximumOD4.6. Calibrate first.

See mount-table.csv: exact fixing centre/axis andmanifest for screw length, insert length and grip.

Replacement parts only: never stack old bracket or old cowl. Base and motor native datums unchanged.

Trial printed linear +/-0.2 after coupon calibration; inspect washer seating and de-support internal ears.


Source dimensions, thread engagement and hardware envelopes do not certify plastic retention or metal GD&T.

Three named static poses and empty straight hex-key space only; motion, actual tools and load not released.

A16-C05-J6-mount-plate


mm | NOMINAL FIT ONLY | supported, unpowered, unloaded | original CAD axes

XY all edges, hidden included

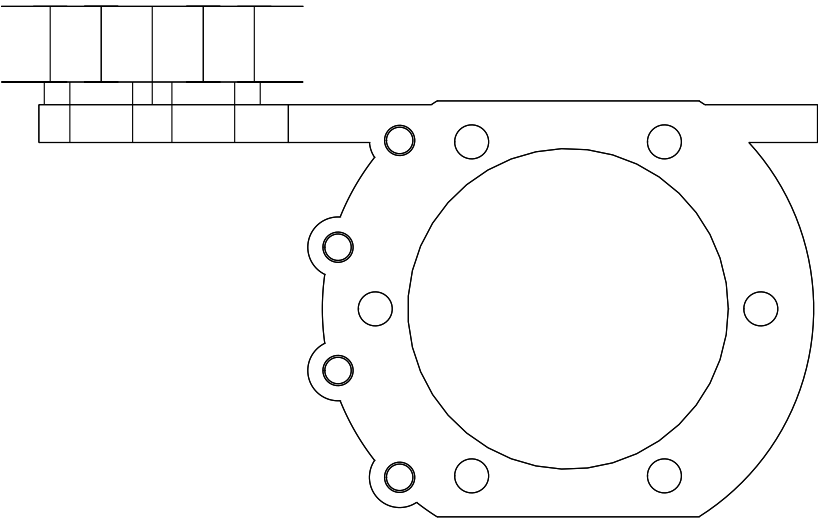


Overall108.000 x67.500; scale1.000

XZ all edges, hidden included

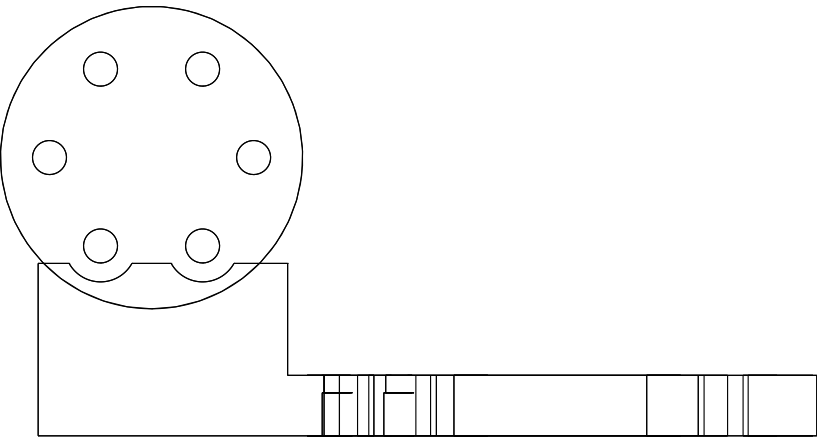

Overall108.000 x56.800; scale1.000

YZ all edges, hidden included

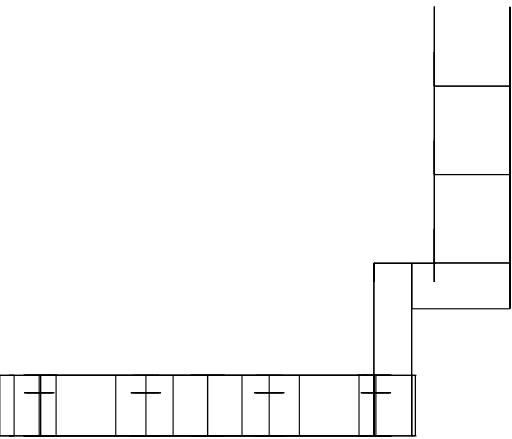

Overall67.500 x56.800; scale1.000

STEP defines complete nominal geometry; native holes retained. mount-table.csv lists added centres/axes.

Heat-set pilotsD4.0; genuine ruthexRX-M3x5.7 /RX-M3Sx4.0,maximumOD4.6. Calibrate first.

See mount-table.csv: exact fixing centre/axis andmanifest for screw length, insert length and grip.

Replacement parts only: never stack old bracket or old cowl. Base and motor native datums unchanged.

Trial printed linear +/-0.2 after coupon calibration; inspect washer seating and de-support internal ears.


Source dimensions, thread engagement and hardware envelopes do not certify plastic retention or metal GD&T.

Three named static poses and empty straight hex-key space only; motion, actual tools and load not released.

A16-C05-J6-cowl-a


mm | NOMINAL FIT ONLY | supported, unpowered, unloaded | original CAD axes

XY all edges, hidden included

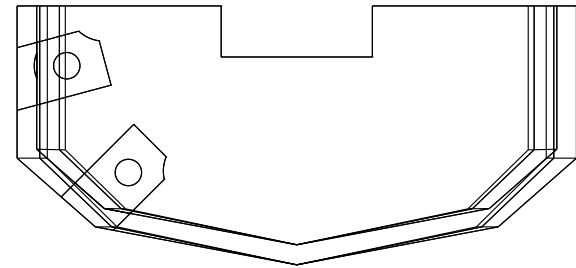


Overall74.000 x34.235; scale1.000

XZ all edges, hidden included

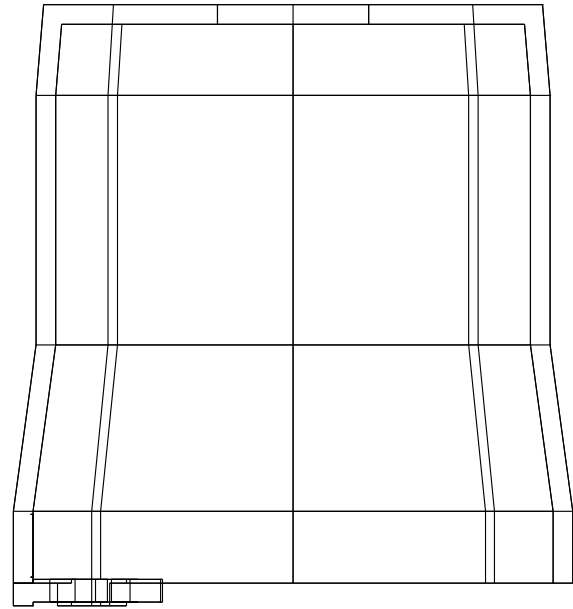

Overall74.000 x79.500; scale1.000

YZ all edges, hidden included

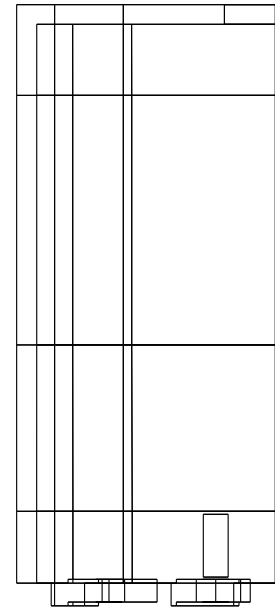

Overall34.235 x79.500; scale1.000

STEP defines complete nominal geometry; native holes retained. mount-table.csv lists added centres/axes.

Heat-set pilotsD4.0; genuine ruthexRX-M3x5.7 /RX-M3Sx4.0,maximumOD4.6. Calibrate first.

See mount-table.csv: exact fixing centre/axis andmanifest for screw length, insert length and grip.

Replacement parts only: never stack old bracket or old cowl. Base and motor native datums unchanged.

Trial printed linear +/-0.2 after coupon calibration; inspect washer seating and de-support internal ears.


Source dimensions, thread engagement and hardware envelopes do not certify plastic retention or metal GD&T.

Three named static poses and empty straight hex-key space only; motion, actual tools and load not released.

A16-C05-J6-cowl-b


mm | NOMINAL FIT ONLY | supported, unpowered, unloaded | original CAD axes

XY all edges, hidden included

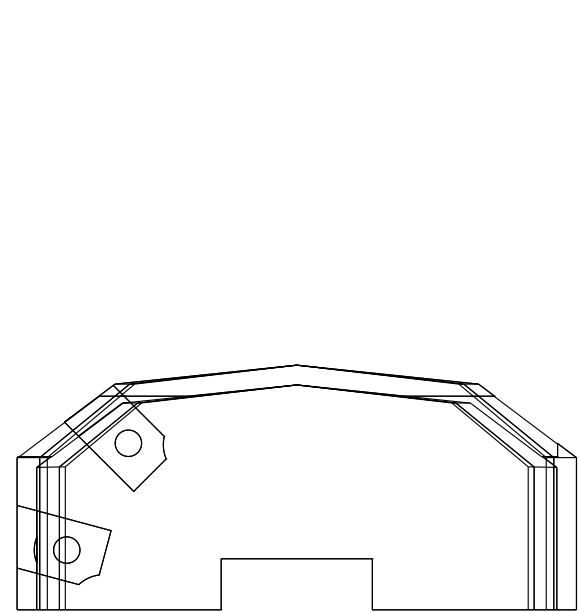


Overall74.000 x32.354; scale1.000

XZ all edges, hidden included

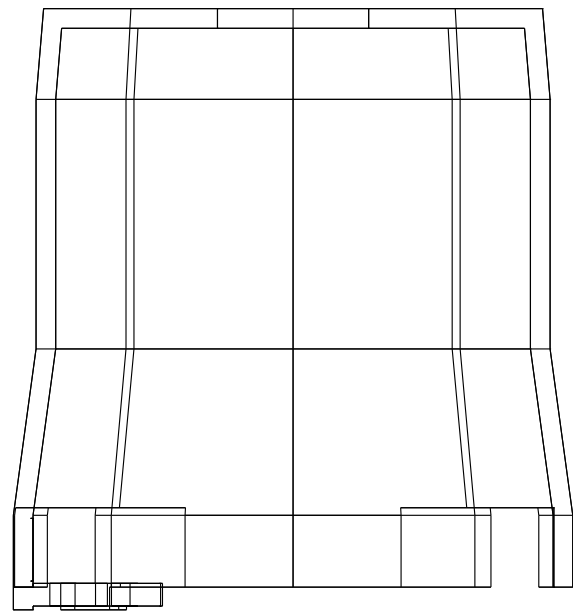

Overall74.000 x79.500; scale1.000

YZ all edges, hidden included

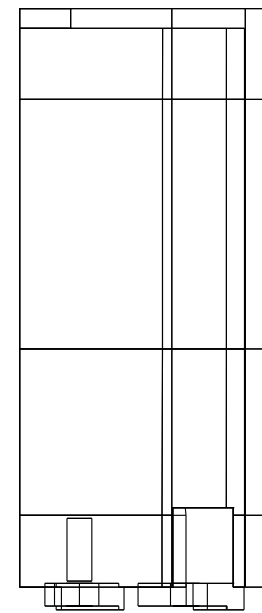

Overall32.354 x79.500; scale1.000

STEP defines complete nominal geometry; native holes retained. mount-table.csv lists added centres/axes.

Heat-set pilotsD4.0; genuine ruthexRX-M3x5.7 /RX-M3Sx4.0,maximumOD4.6. Calibrate first.

See mount-table.csv: exact fixing centre/axis andmanifest for screw length, insert length and grip.

Replacement parts only: never stack old bracket or old cowl. Base and motor native datums unchanged.

Trial printed linear +/-0.2 after coupon calibration; inspect washer seating and de-support internal ears.

Source dimensions, thread engagement and hardware envelopes do not certify plastic retention or metal GD&T.

Three named static poses and empty straight hex-key space only; motion, actual tools and load not released.


A16-C05-J7-bearing-housing

mm | NOMINAL FIT ONLY | supported, unpowered, unloaded | original CAD axes


XY all edges, hidden included

XZ all edges, hidden included


YZ all edges, hidden included

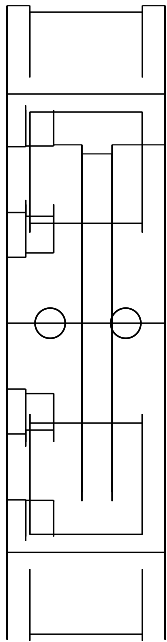

Overall20.900 x84.000; scale1.000

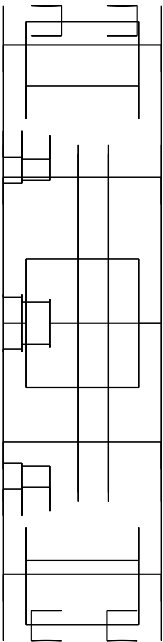

Overall20.900 x84.000; scale1.000

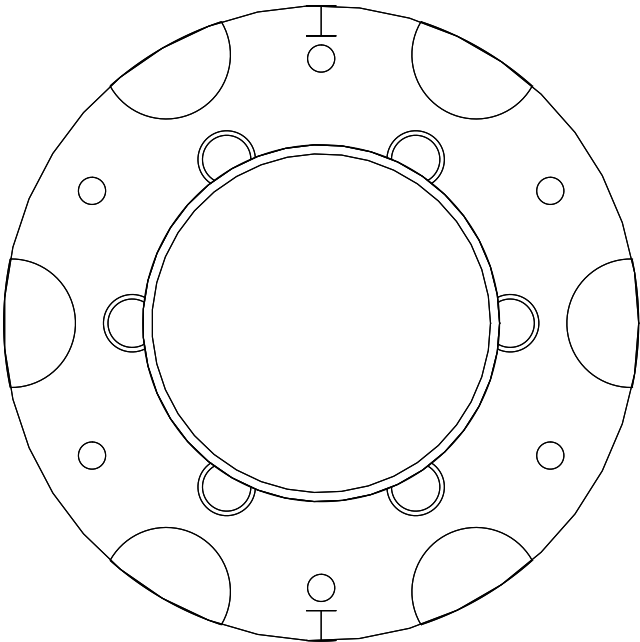

Overall84.000 x84.000; scale1.000

STEP defines complete nominal geometry; native holes retained. mount-table.csv lists added centres/axes.

Heat-set pilotsD4.0; genuine ruthexRX-M3x5.7 /RX-M3Sx4.0,maximumOD4.6. Calibrate first.

See mount-table.csv: exact fixing centre/axis andmanifest for screw length, insert length and grip.

Replacement parts only: never stack old bracket or old cowl. Base and motor native datums unchanged.

Trial printed linear +/-0.2 after coupon calibration; inspect washer seating and de-support internal ears.


Source dimensions, thread engagement and hardware envelopes do not certify plastic retention or metal GD&T.

Three named static poses and empty straight hex-key space only; motion, actual tools and load not released.

A16-C05-J7-cowl-a


mm | NOMINAL FIT ONLY | supported, unpowered, unloaded | original CAD axes

XY all edges, hidden included

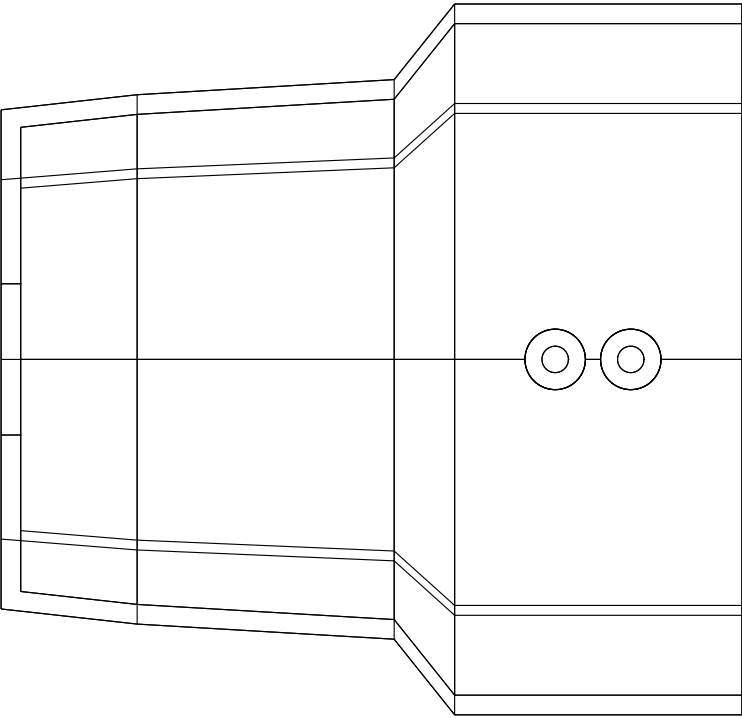


Overall98.000 x94.000; scale1.000

XZ all edges, hidden included

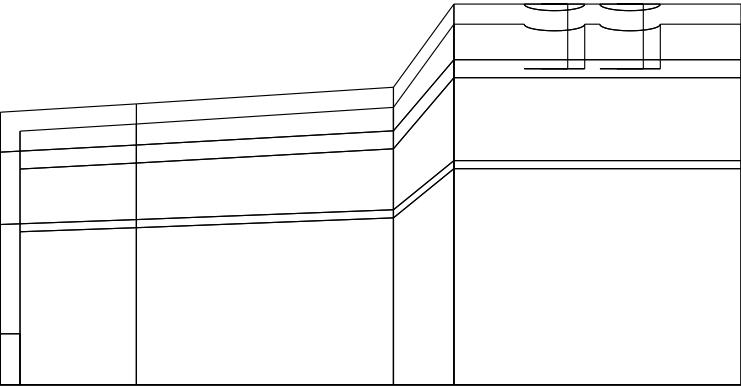

Overall98.000 x50.350; scale1.000

YZ all edges, hidden included

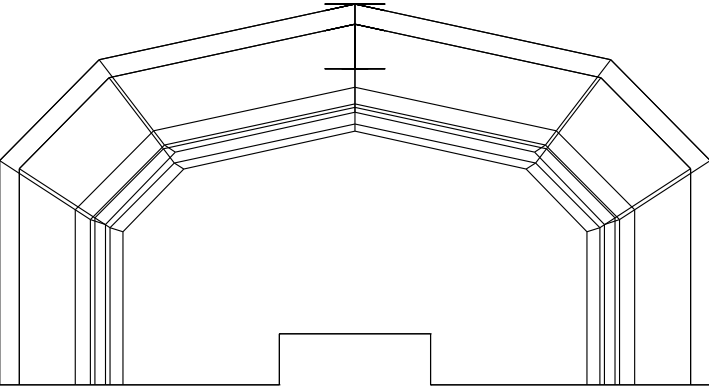

Overall94.000 x50.350; scale1.000

STEP defines complete nominal geometry; native holes retained. mount-table.csv lists added centres/axes.

Heat-set pilotsD4.0; genuine ruthexRX-M3x5.7 /RX-M3Sx4.0,maximumOD4.6. Calibrate first.

See mount-table.csv: exact fixing centre/axis andmanifest for screw length, insert length and grip.

Replacement parts only: never stack old bracket or old cowl. Base and motor native datums unchanged.

Trial printed linear +/-0.2 after coupon calibration; inspect washer seating and de-support internal ears.


Source dimensions, thread engagement and hardware envelopes do not certify plastic retention or metal GD&T.

Three named static poses and empty straight hex-key space only; motion, actual tools and load not released.

A16-C05-J7-cowl-b


mm | NOMINAL FIT ONLY | supported, unpowered, unloaded | original CAD axes

XY all edges, hidden included

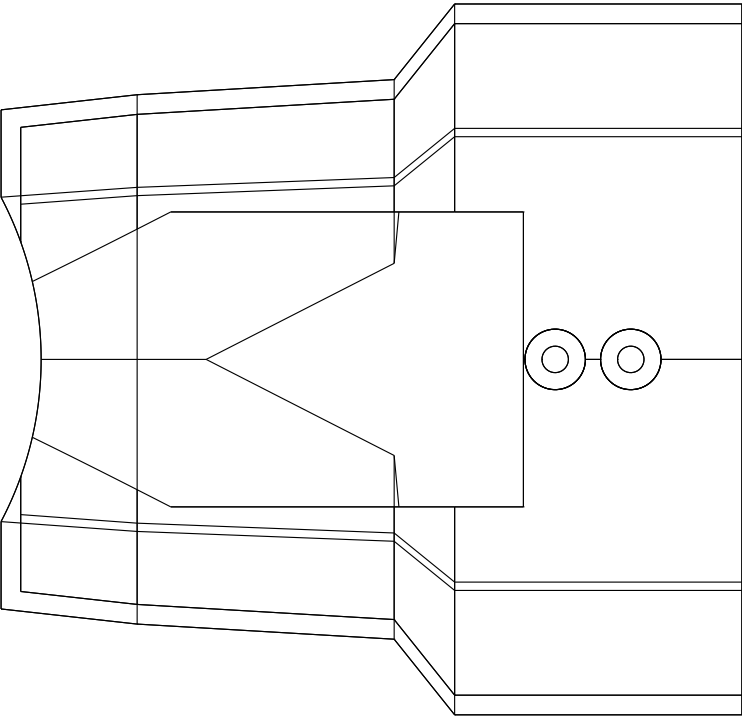


Overall98.000 x94.000; scale1.000

XZ all edges, hidden included

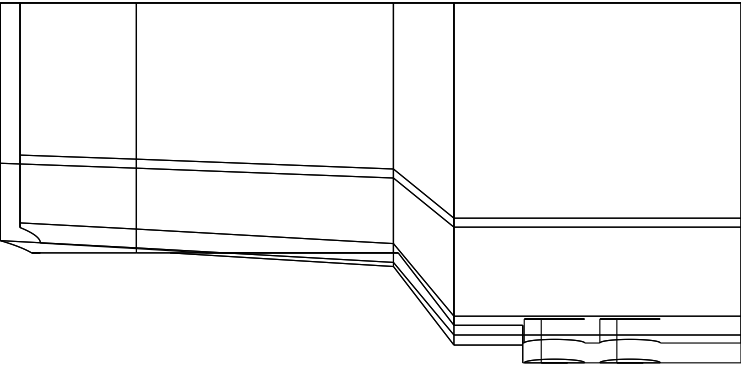

Overall98.000 x47.590; scale1.000

YZ all edges, hidden included

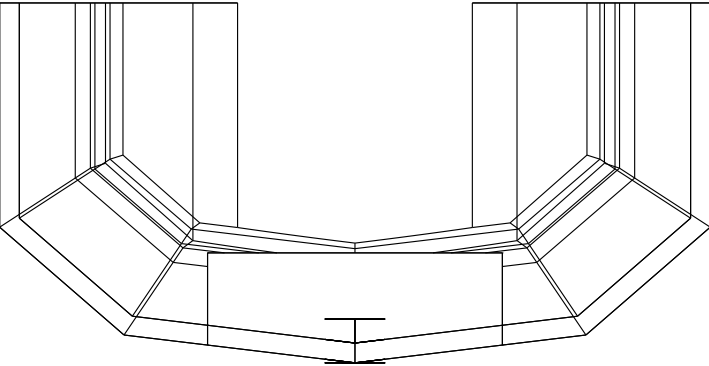

Overall94.000 x47.590; scale1.000

STEP defines complete nominal geometry; native holes retained. mount-table.csv lists added centres/axes.

Heat-set pilotsD4.0; genuine ruthexRX-M3x5.7 /RX-M3Sx4.0,maximumOD4.6. Calibrate first.

See mount-table.csv: exact fixing centre/axis andmanifest for screw length, insert length and grip.

Replacement parts only: never stack old bracket or old cowl. Base and motor native datums unchanged.

Trial printed linear +/-0.2 after coupon calibration; inspect washer seating and de-support internal ears.

Source dimensions, thread engagement and hardware envelopes do not certify plastic retention or metal GD&T.

Three named static poses and empty straight hex-key space only; motion, actual tools and load not released.