
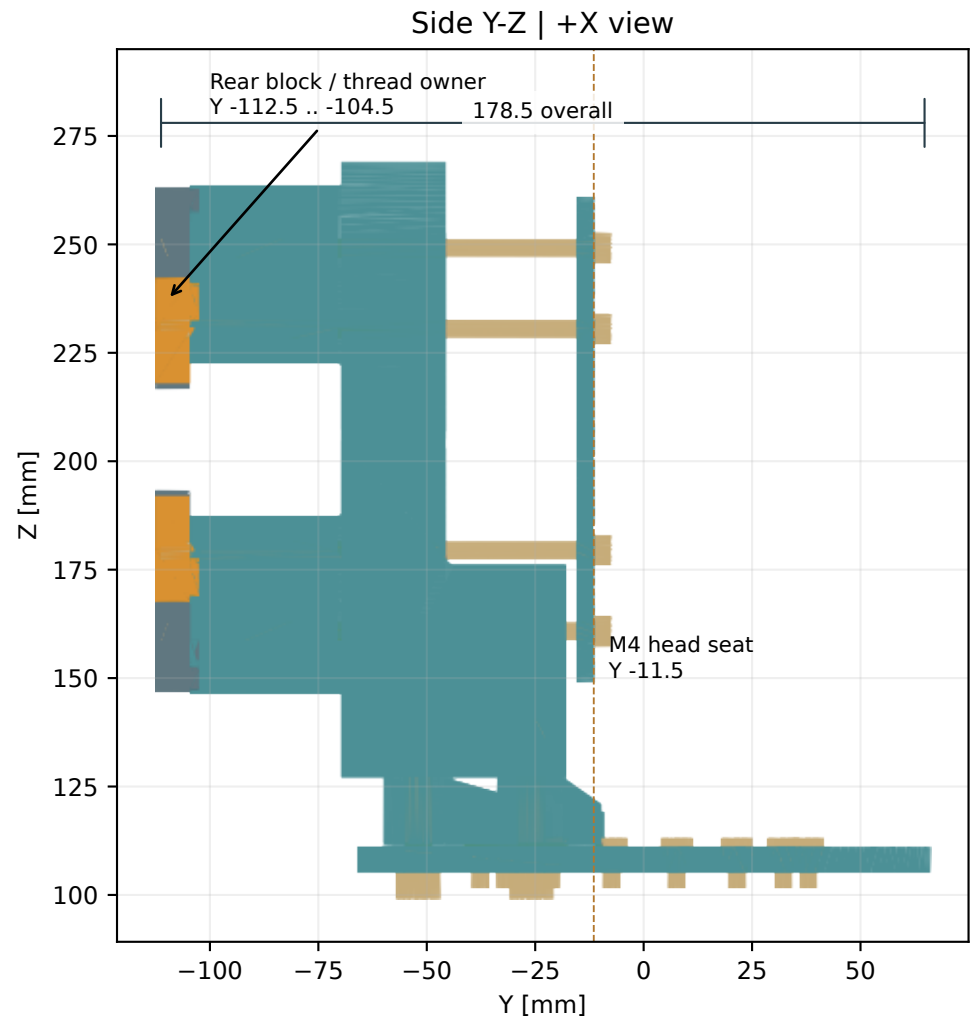


SHOULDER-RAISE03 | Local assembly reference

World home [mm] / J1 Z105.2 / J2 Z205.0 / all 39 parts follow J1 only

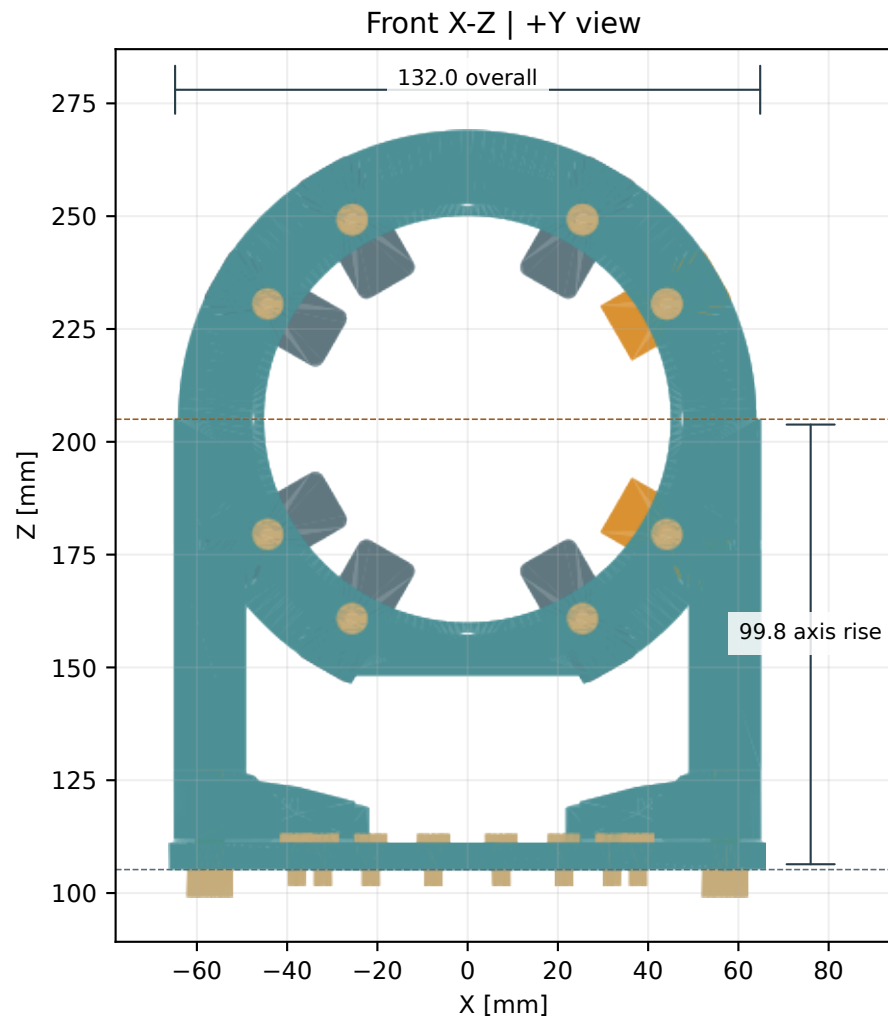

Included: 11 original metal parts + 28 nominal hardware envelopes. OEM motors are omitted from public CAD.


Original metal: 1.227752 kg | primary planning total: 1.427752 kg

Orange: PORT01 trimmed blocks 1 / 8. Gold: hardware envelopes. Shoulder height and forward clearance unchanged.

Nominal geometry only; not a manufacturing drawing. Tolerances, preload, plugs and full thread lengths remain open.

Connections and geometry-only print set

Original assembly; motors omitted

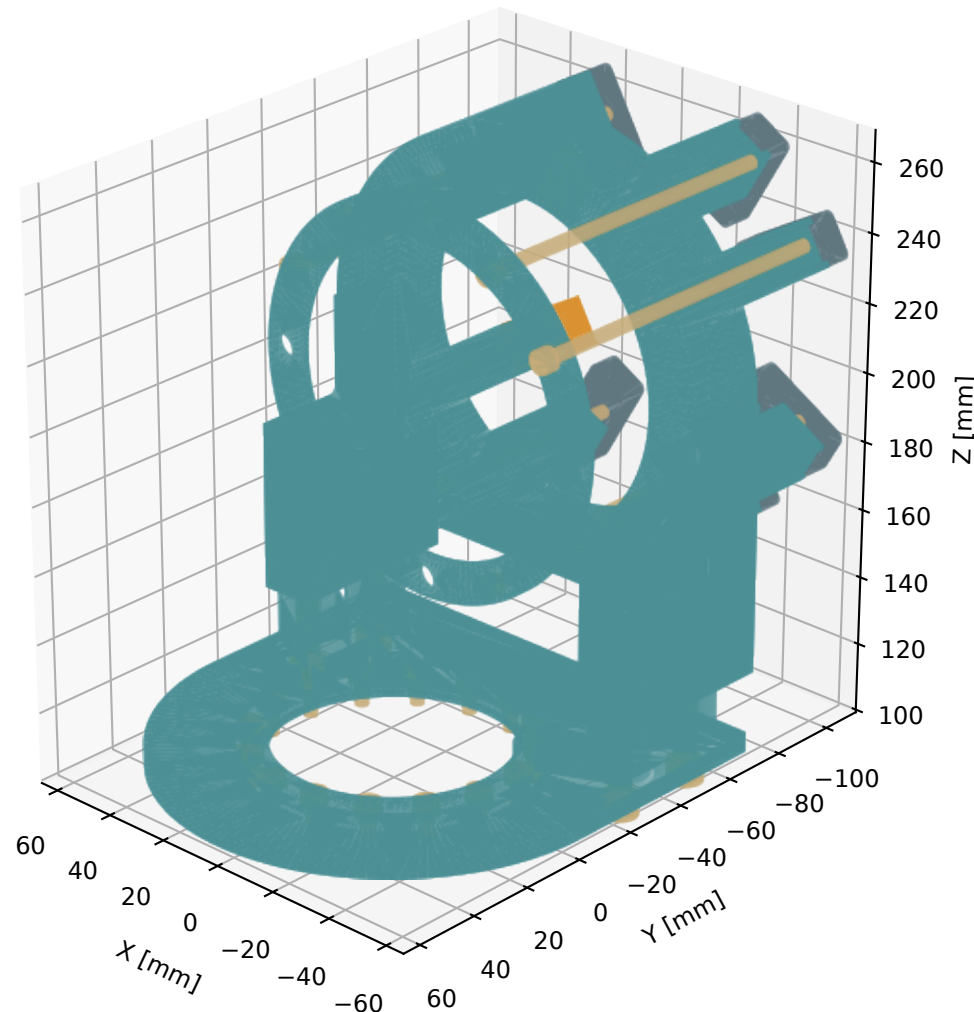

8 x Fabory 07000.040.100 (candidate)

M4 x 0.7 x 100, class 12.9, plain

Max head D7 x H4; AF3; thread b20

Y stack [mm]

Head bearing plane: -11.5

Thread start: -91.5

Block entry: -104.5

Screw tip: -111.5

Block rear: -112.5

Grip 93 / geometric entry 7 / tip gap 1

Effective complete-thread entry: TBD

Nominal head bearing footprint

22.580 mm² each at max head diameter

Same-force pressure ratio vs old: 1.1088

No preload / wrench torque selected.

Geometry-only print set: 11 individual original parts. Each STL has a declared reversible print-frame transform.

Do not energize motors or apply a payload/preload through printed parts. No inserts or printed threads are qualified.