
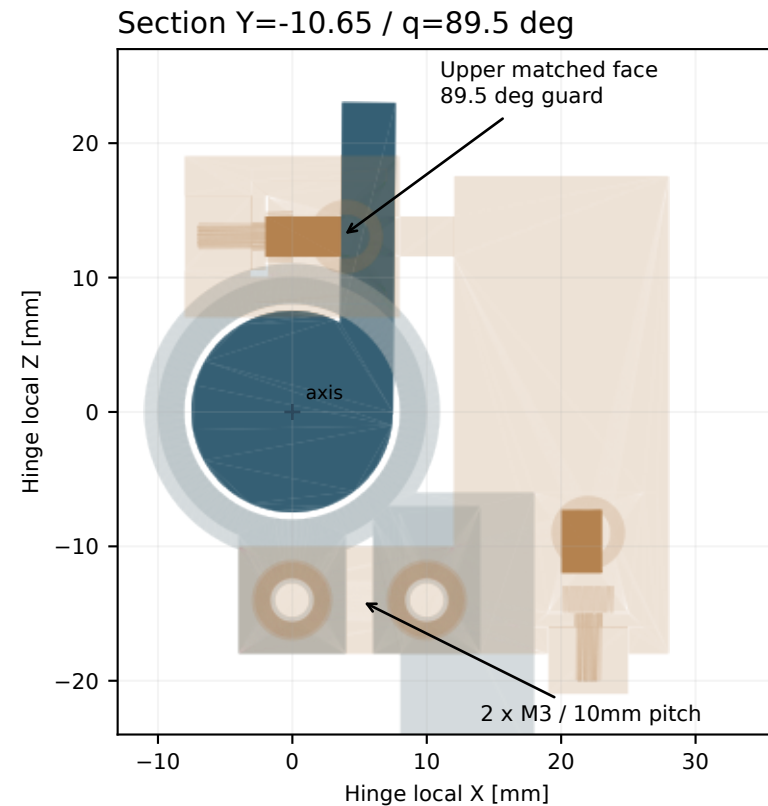


R5 / guarded hinge stops on the translating carrier

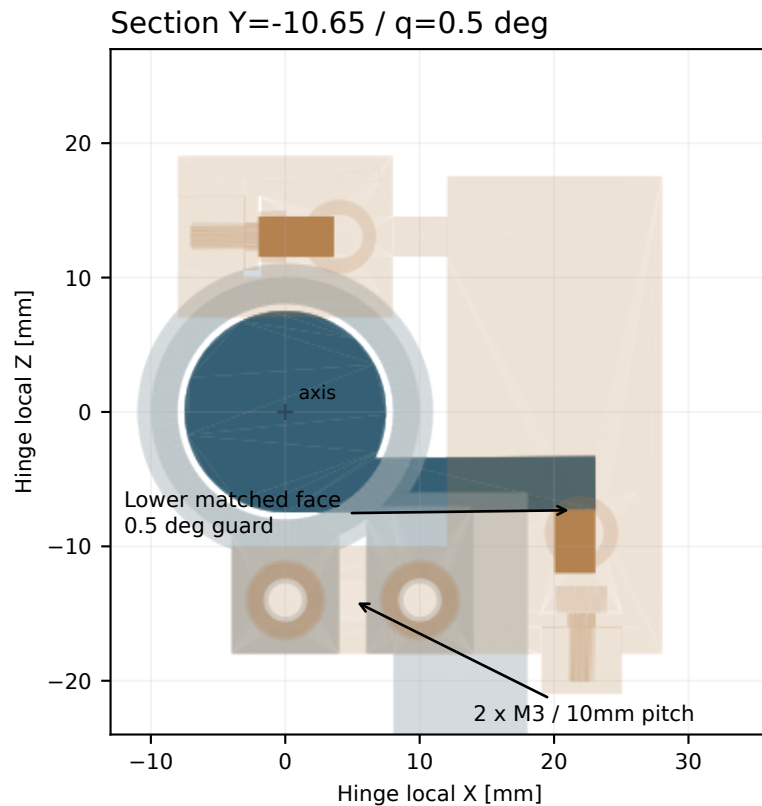

Nominal contact: 6.9003 mm² per end; the original steel cradle is unchanged.

The 0.5 deg guards reserve angular room for calibration and deformation; no physical tolerance budget is closed.

At q89.5 the stop blocks further closing. It cannot react the opposite opening moment of object grip.

Slot8.3 / followerD8 permits a nearby assembly band reaching about -1.540..91.540 deg (sampled).

A clipped nominal path fits the ideal groove, but two rigid constraints can still jam with runout or tolerance.

This candidate is an angle fence, not a controller, a return mechanism or proof of contact with a slot wall.

Stop module / sections / nominal fixing and adjustment

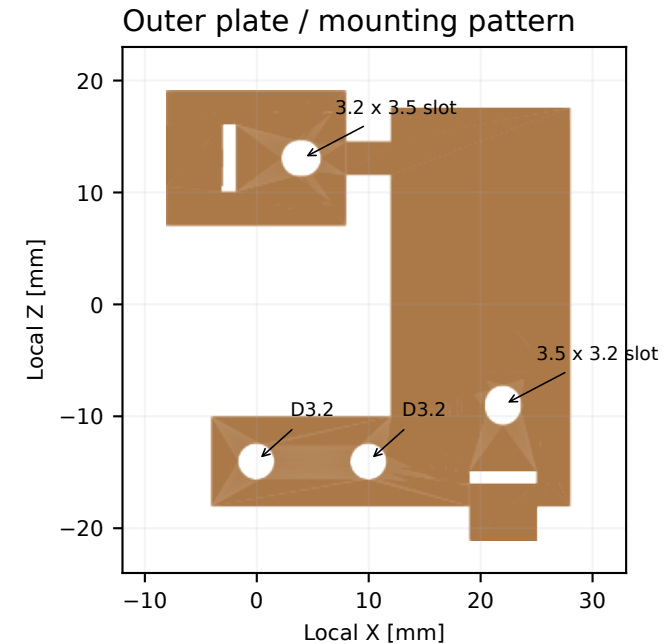
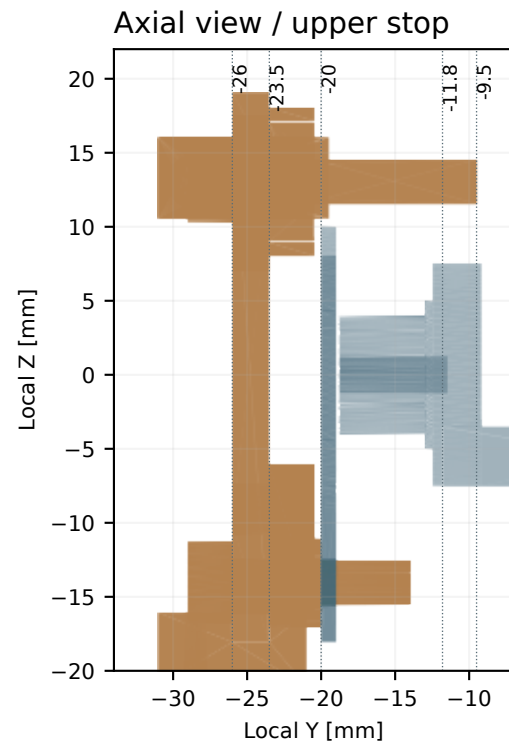


Plate: 2.5 thick at Y-26..-23.5; spacers D6/D3.2 x 3.5 to original cap Y-20.

Replace only two negative-side M3x6 by nominal M3x12: same end Y-14, original 5mm Al engagement.

Bridge clamp: M3x6; upper steel engagement 3.0mm / lower 3.5mm. Retained backing shims: 1.00mm nominal.

Upper contact tongue: Y-23.5..-9.5, Z 11.5..14.5; lower: X 20..23, same Y. CAD defines angled faces.

Assembly: off-palm, guide absent; fit backing shims and M2 retainers before the adjacent M3 clamp screws.

Fit module at an intermediate angle, then install the fixed guide and measure both stop angles.

Flat shims change first-contact angle and create edge contact: regrind or remeasure contact before loading.

Two inline cap screws leave peel/preload and thin-cap compliance unresolved. Impact torque is unspecified.