



ODRADEK / MOLDED PAD KEYS

UPPER finger | all dimensions mm | nominal prototype / NOT RELEASED

BACK VIEW / coupon outline only

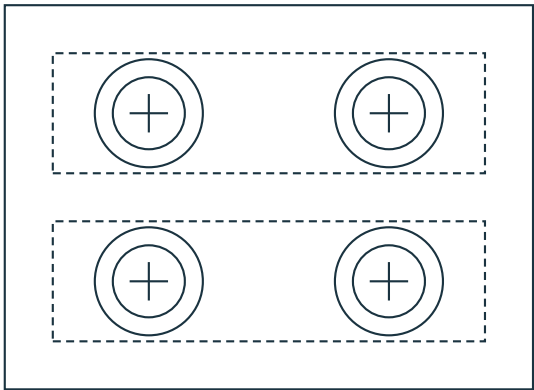

Dashed: two pad footprints, 18 x 5, centers y = +/-3.5
Coupon: x = -20...+2; y = -8...+8; z = 0...6
Full blade retains CONTACT02 outline; toe datum x = 0

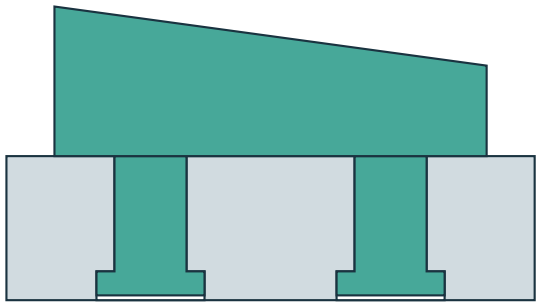

A-A / through y = +/-3.5

Soft undercuts are cast in place; no adhesive strength credited.


DIMENSION / FEATURE TABLE

Blade datum: toe X=0, center Y=0, back Z=0.
Full blade length 150; thickness 6.
4 x through hole diameter 3.0, axis +Z.
4 x backside counterbore diameter 4.5, depth 1.2.
Hole centers: X=-14 / -4; Y=-3.5 / +3.5.
Hole pitch X=10; pair pitch Y=7.
Soft head diameter 4.5; Z=0.2...1.2.
Soft stem diameter 3.0; Z=1.2...6.
Soft back recess 0.2; head thickness 1.0.
2 x pad plan: X=-18...0; width 5.
Pad top $Z = 11 + (X+9) * (-0.136731445)$.
Pad thickness: X=-18: 6.230583; X=0: 3.769417.
Pad wedge reference $q = 97.785854$ deg.
Min. nominal bore-to-outline ligament: 1.736737.
Material: blade 6061-T6 candidate; soft DS30 candidate.
Prototype coupons: printed geometry, NOT load-rated.
Deburr hole edges; radius/tolerance/shrinkage not frozen.
Do not machine or mold as a released load-bearing part.


ODRADEK / MOLDED PAD KEYS

LOWER finger | all dimensions mm | nominal prototype / NOT RELEASED

BACK VIEW / coupon outline only

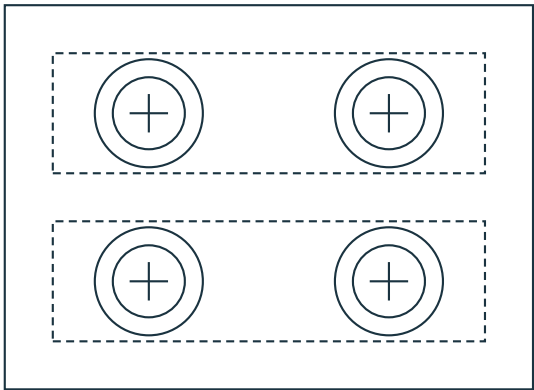

Dashed: two pad footprints, 18 x 5, centers y = +/-3.5
Coupon: x = -20...+2; y = -8...+8; z = 0...6
Full blade retains CONTACT02 outline; toe datum x = 0

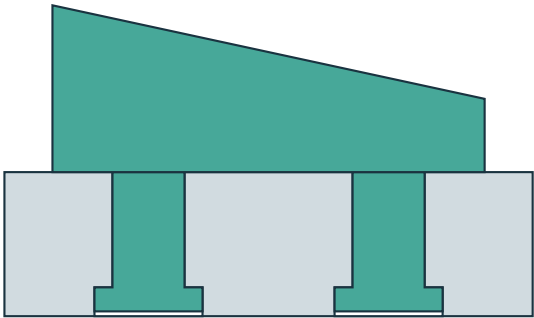

A-A / through y = +/-3.5

Soft undercuts are cast in place; no adhesive strength credited.

DIMENSION / FEATURE TABLE

Blade datum: toe X=0, center Y=0, back Z=0.
Full blade length 100; thickness 6.
4 x through hole diameter 3.0, axis +Z.
4 x backside counterbore diameter 4.5, depth 1.2.
Hole centers: X=-14 / -4; Y=-3.5 / +3.5.
Hole pitch X=10; pair pitch Y=7.
Soft head diameter 4.5; Z=0.2...1.2.
Soft stem diameter 3.0; Z=1.2...6.
Soft back recess 0.2; head thickness 1.0.
2 x pad plan: X=-18...0; width 5.
Pad top $Z = 11 + (X+9) * (-0.216423601)$.
Pad thickness: X=-18: 6.947812; X=0: 3.052188.
Pad wedge reference $q = 102.211820$ deg.
Min. nominal bore-to-outline ligament: 1.750000.
Material: blade 6061-T6 candidate; soft DS30 candidate.
Prototype coupons: printed geometry, NOT load-rated.
Deburr hole edges; radius/tolerance/shrinkage not frozen.
Do not machine or mold as a released load-bearing part.