

A16-R104-spacer-1 / ALL FOUR IDENTICAL SLEEVES


mm | STOCK CUT / DRILL TRIAL | source CAD coordinates | supported, unpowered, unloaded

XY all edges, hidden included




BREP span12.000x12.000; scale1.000

XZ all edges, hidden included



BREP span12.000x96.500; scale1.000

YZ all edges, hidden included



BREP span12.000x96.500; scale1.000

Qty4 equal stock steel sleeves; OD12 / ID6; axial cut96.5 +/-0.1mm.

Square both ends and deburr. Equal-length full annular seating; not printed columns.

No threads or cross holes. See current assembly07 for plate stack, not the historical R102 stack.

Prototype dimensions only. Material certification, structural loads and production GD&T unqualified.


A16-S105-upper-stock-tube

mm | STOCK CUT / DRILL TRIAL | source CAD coordinates | supported, unpowered, unloaded


XY all edges, hidden included

XZ all edges, hidden included


YZ all edges, hidden included



BREP span220.000x20.000; scale0.527

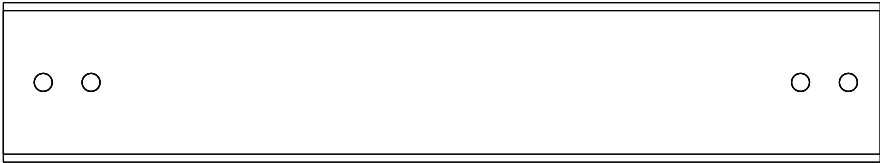

BREP span220.000x40.000; scale0.527



BREP span20.000x40.000; scale1.000

Qty1 stock6061-T6 rectangular tube20x40x2; cut length220mm. Nominal trial only.

Datum A=cut beginning (minimumCAD X); datum B=bottom(minimumCAD Z); datum C=outer20-wide side.

4xD4.5 THRU both20-width walls, X from datum A: 10, 22, 200, 212mm; Z from B=20mm.

Saw/drill/deburr with fixture; supported-fit targets length+/-0.2 and hole position+/-0.2mm.


Eight OD8/ID4.5/L16 anti-crush sleeves across both tubes; confirm actual inside width before clamping.

Prototype dimensions only. Material certification, structural loads and production GD&T unqualified.

A16-S108-fore-stock-tube


mm | STOCK CUT / DRILL TRIAL | source CAD coordinates | supported, unpowered, unloaded

XY all edges, hidden included

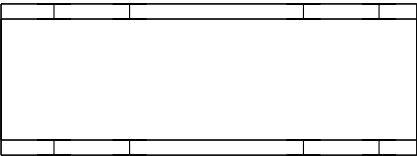


BREP span55.000x20.000; scale1.000

XZ all edges, hidden included

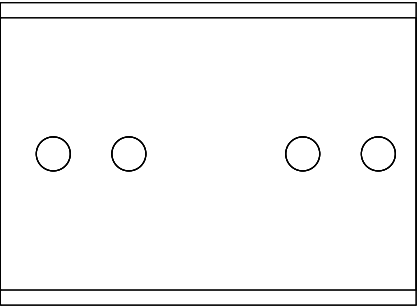

BREP span55.000x40.000; scale1.000

YZ all edges, hidden included



BREP span20.000x40.000; scale1.000

Qty1 stock6061-T6 rectangular tube20x40x2; cut length55mm. Nominal trial only.

Datum A=cut beginning (minimumCAD X); datum B=bottom(minimumCAD Z); datum C=outer20-wide side.

4xD4.5 THRU both20-width walls, X from datum A: 7, 17, 40, 50mm; Z from B=20mm.

Saw/drill/deburr with fixture; supported-fit targets length+/-0.2 and hole position+/-0.2mm.

Eight OD8/ID4.5/L16 anti-crush sleeves across both tubes; confirm actual inside width before clamping.

Prototype dimensions only. Material certification, structural loads and production GD&T unqualified.