
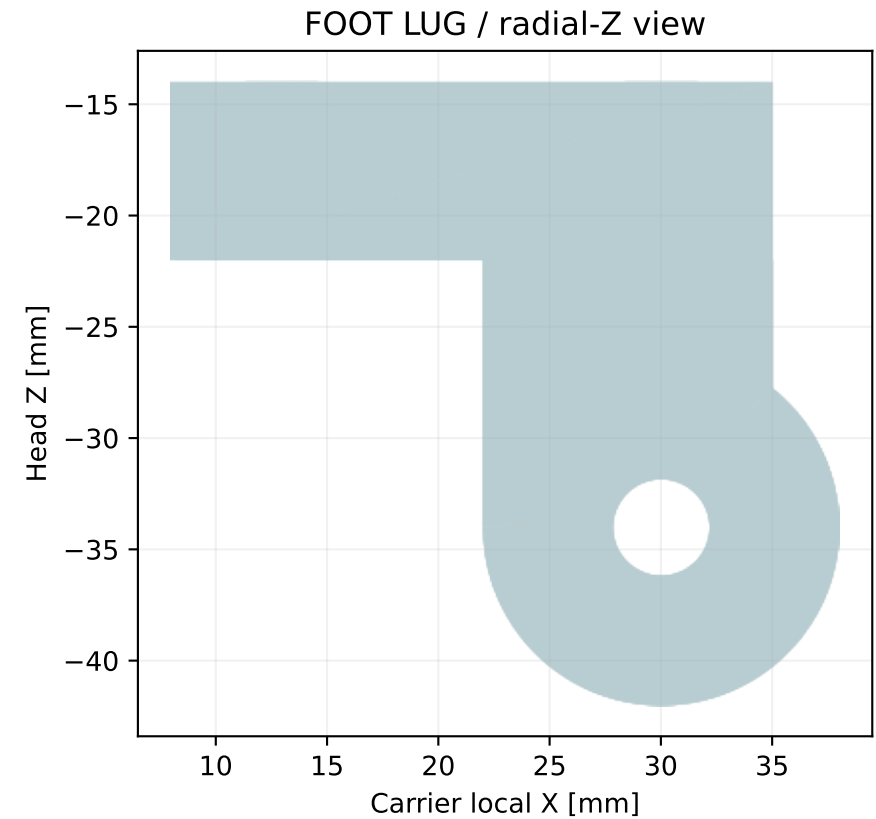


R5-SYNC01 / nominal links and root attachment

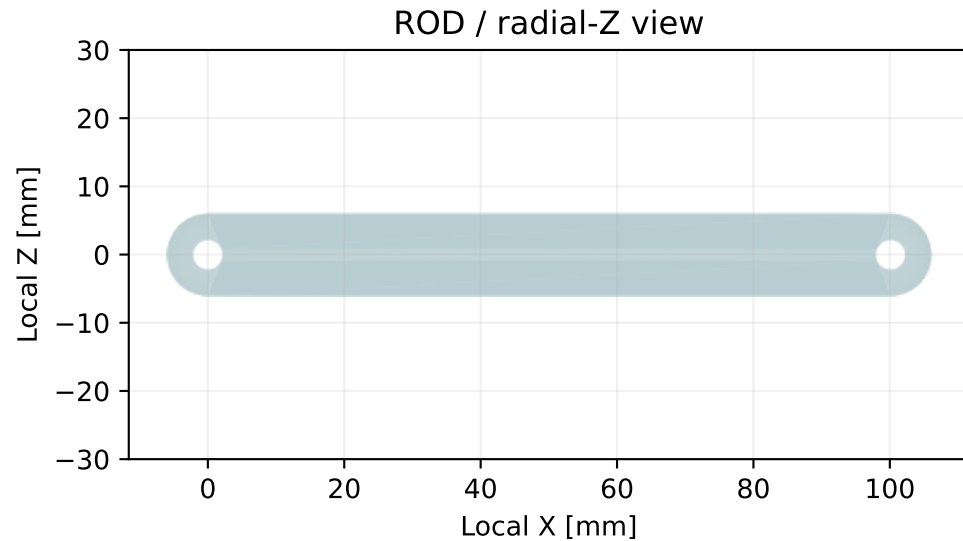



ROD: pin centers 100; end R6; Y thickness 6; two D4.3 through holes along Y.

LUG: base X8..35 / Y +/-12 / head Z-22..-14; four nominal M4 tap drills D3.3 at X13/30,Y+/-8.

Lug pin axis [30,0,-34]; ear inner Y +/-4.2, outer +/-8.2; D4.3 through pin bores.

Common alloy density 2700 kg/m³ is a mass assumption. No pin retention, bearing fits, tap class or preload release.

R5-SYNC01 / shared axial spider

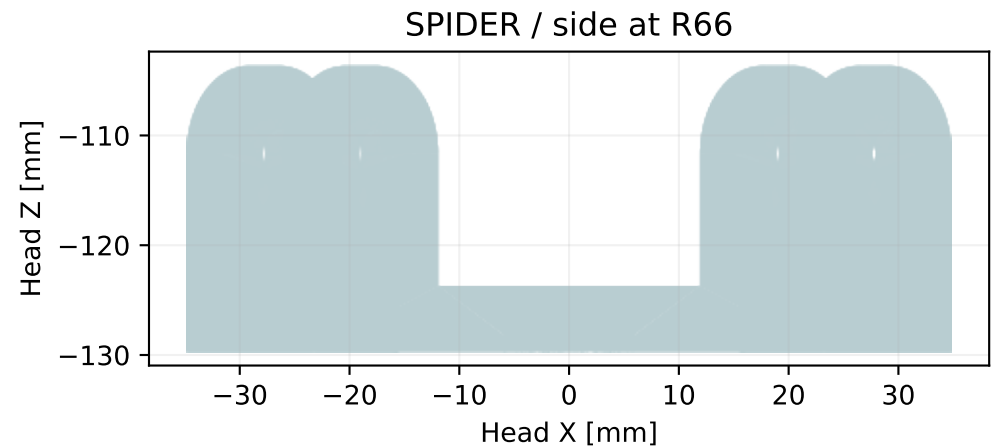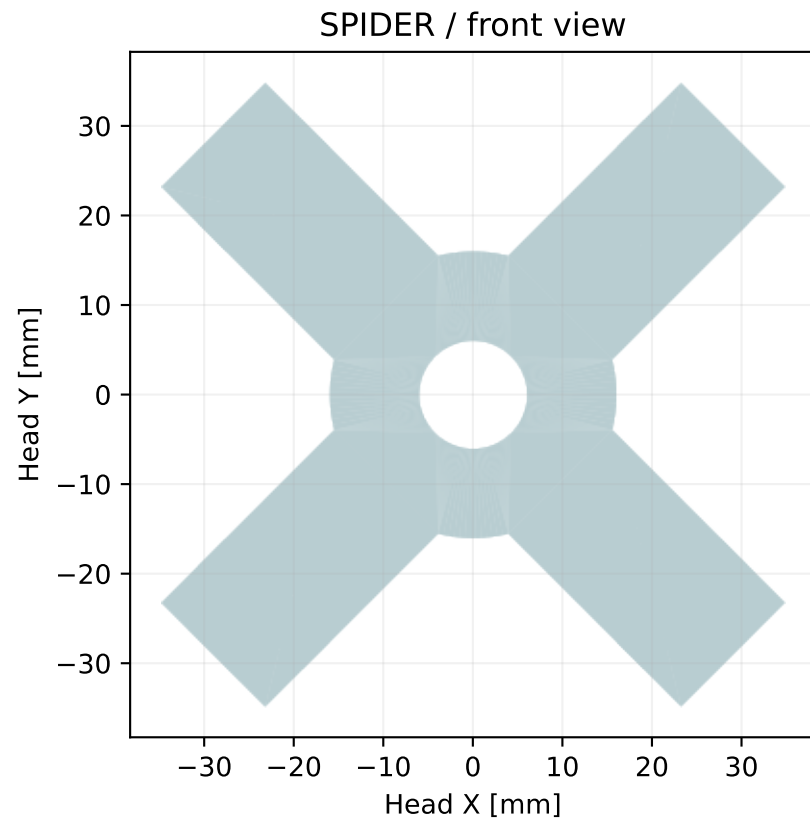

Four pin axes: radius33 at azimuth45/135/225/315; local pin Z0; D4.3 through tangent bores.

Spoke plate: local Z-18..-12; central hub OD32 / provisional D12 clearance.

This hub is NOT the selected KSS nut interface; larger flange, bearing/anti-rotation, shaft and mount still need design.

$R=3+\sqrt{100^2-h^2}$, $h47.49737..96$; outer pin Z-34; spider pin plane $Z=-34-h$ [mm].