


AUROMIX / ODRADEK | B06-LOAD-02-STANDALONE

B06-101-LOAD-DECK

TOP XY - fitted view (NTS)

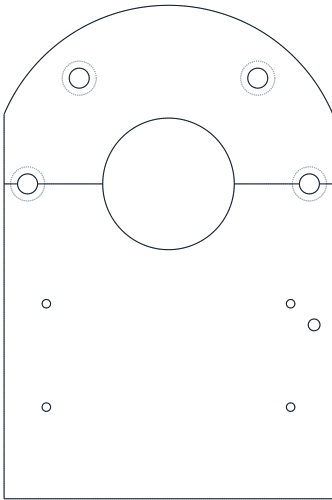

FRONT XZ - fitted view (NTS)



SIDE YZ - fitted view (NTS)



ENVELOPE / GLOBAL ASSEMBLY DATUM

X [-70.000, 70.000] Y [-59.000, 151.000] Z [2.000, 17.000]

Overall 140.000 x 210.000 x 15.000; material S355; exact STEP: B06-101-LOAD-DECK.step

Assembly origin: X0 centreline; Y75 arm axis; Z0 tabletop. Ordinate features below use these datums.

Metal general linear +/-0.10; hole centres +/-0.10; cut silicone +/-0.50; threads as called out; deburr R0.5.

CNC profile and drill/counterbore; weld assembly B06-W01
15 mm finished thickness; rear Y-59, table rear edge Y-45; corners deburr R0.5
Datum A upper Z17; flatness0.15 after welding; no polymer carries arm preload

FEATURES: entry X/Y/Z ; axis ; bore/depth ; machining callout

0.000/75.000/2.000 ; [0/0/1] ; D56.000 x 15.000 ; D56 THRU; harness passage
-60.000/75.000/2.000 ; [0/0/1] ; D8.500 x 15.000 ; D8.5 THRU
-60.000/75.000/2.000 ; [0/0/1] ; D14.500 x 8.500 ; BOTTOM CBORE D14.5 x8.5; M8x20 ISO4762; underhead Z10.5
60.000/75.000/2.000 ; [0/0/1] ; D8.500 x 15.000 ; D8.5 THRU
60.000/75.000/2.000 ; [0/0/1] ; D14.500 x 8.500 ; BOTTOM CBORE D14.5 x8.5; M8x20 ISO4762; underhead Z10.5
-38.000/120.000/2.000 ; [0/0/1] ; D8.500 x 15.000 ; D8.5 THRU
-38.000/120.000/2.000 ; [0/0/1] ; D14.500 x 8.500 ; BOTTOM CBORE D14.5 x8.5; M8x20 ISO4762; underhead Z10.5
38.000/120.000/2.000 ; [0/0/1] ; D8.500 x 15.000 ; D8.5 THRU
38.000/120.000/2.000 ; [0/0/1] ; D14.500 x 8.500 ; BOTTOM CBORE D14.5 x8.5; M8x20 ISO4762; underhead Z10.5
-52.000/-20.000/2.000 ; [0/0/1] ; D3.600 x 15.000 ; D3.6 THRU; clearance for PCB screw tip, no electrical board contact
-52.000/24.000/2.000 ; [0/0/1] ; D3.600 x 15.000 ; D3.6 THRU; clearance for PCB screw tip, no electrical board contact
52.000/-20.000/2.000 ; [0/0/1] ; D3.600 x 15.000 ; D3.6 THRU; clearance for PCB screw tip, no electrical board contact
52.000/24.000/2.000 ; [0/0/1] ; D3.600 x 15.000 ; D3.6 THRU; clearance for PCB screw tip, no electrical board contact
62.000/15.000/17.000 ; [0/0/-1] ; D5.000 x 12.000 ; M6x1-6H; full thread9; drill12; dedicated chassis bonding point


AUROMIX / ODRADEK | B06-LOAD-02-STANDALONE

B06-102-REAR-WEB

TOP XY - fitted view (NTS)



FRONT XZ - fitted view (NTS)

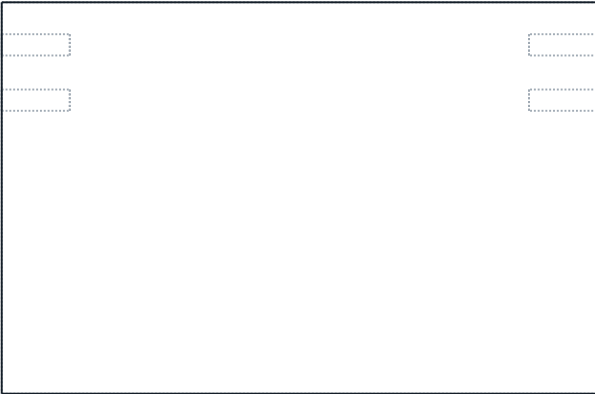

SIDE YZ - fitted view (NTS)



ENVELOPE / GLOBAL ASSEMBLY DATUM

X [-70.000, 70.000] Y [-59.000, -51.000] Z [-90.000, 2.000]

Overall 140.000 x 8.000 x 92.000; material S355; exact STEP: B06-102-REAR-WEB.step

Assembly origin: X0 centreline; Y75 arm axis; Z0 tabletop. Ordinate features below use these datums.

Metal general linear +/-0.10; hole centres +/-0.10; cut silicone +/-0.50; threads as called out; deburr R0.5.


CNC plate profile/drill/tap; weld B06-W01
8 mm thickness; top Z2; rear Y-59; F6 continuous fillet welds at upper and lower plate joints
Front fillet ends at Y-45, clear of desk; machine datums after weld/stress relief; no weld in desk pad seat

FEATURES: entry X/Y/Z ; axis ; bore/depth ; machining callout

-70.000/-55.000/-80.000 ; [1/0/0] ; D5.000 x 16.000 ; M6x1-6H; full thread13; drill16; shelf hanger
-70.000/-55.000/-67.000 ; [1/0/0] ; D5.000 x 16.000 ; M6x1-6H; full thread13; drill16; shelf hanger
70.000/-55.000/-80.000 ; [-1/0/0] ; D5.000 x 16.000 ; M6x1-6H; full thread13; drill16; shelf hanger
70.000/-55.000/-67.000 ; [-1/0/0] ; D5.000 x 16.000 ; M6x1-6H; full thread13; drill16; shelf hanger

B06-103-LOWER-JAW

TOP XY - fitted view (NTS)

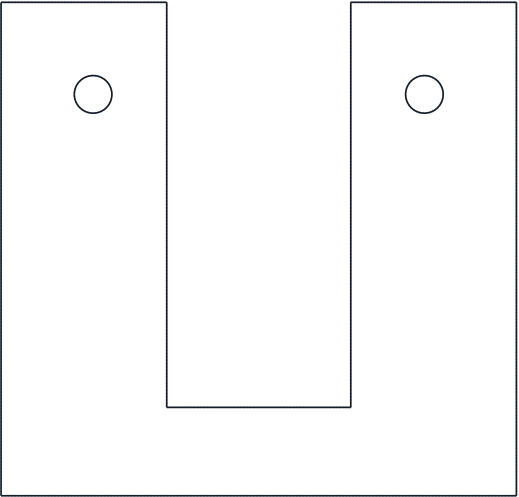

FRONT XZ - fitted view (NTS)



SIDE YZ - fitted view (NTS)



ENVELOPE / GLOBAL ASSEMBLY DATUM

X [-70.000, 70.000] Y [-59.000, 75.000] Z [-104.000, -90.000]

Overall 140.000 x 134.000 x 14.000; material S355; exact STEP: B06-103-LOWER-JAW.step

Assembly origin: X0 centreline; Y75 arm axis; Z0 tabletop. Ordinate features below use these datums.

Metal general linear +/-0.10; hole centres +/-0.10; cut silicone +/-0.50; threads as called out; deburr R0.5.

CNC profile/drill/tap; weld B06-W01

14 mm finished thickness; two full steel threaded legs

M12 thrust screws turn from BELOW with AF6 key; no side knob hidden behind the box

FEATURES: entry X/Y/Z ; axis ; bore/depth ; machining callout


-45.000/50.000/-104.000 ; [0/0/1] ; D10.200 x 14.000 ; M12x1.75-6H THRU; deburr both entries0.5; DIN6332 M12x100

45.000/50.000/-104.000 ; [0/0/1] ; D10.200 x 14.000 ; M12x1.75-6H THRU; deburr both entries0.5; DIN6332 M12x100

AUROMIX / ODRADEK | B06-LOAD-02-STANDALONE

B06-104-LOAD-FLANGE

TOP XY - fitted view (NTS)

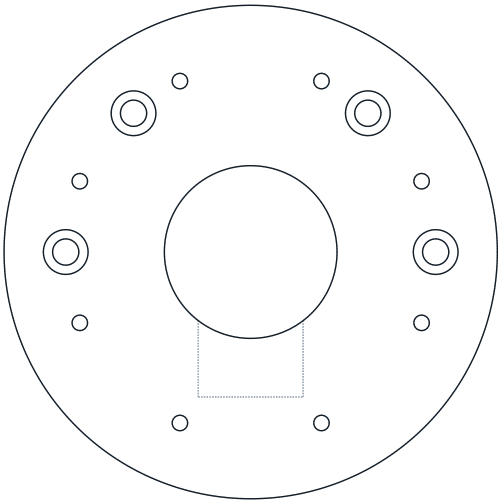

FRONT XZ - fitted view (NTS)



SIDE YZ - fitted view (NTS)



ENVELOPE / GLOBAL ASSEMBLY DATUM

X [-80.000, 80.000] Y [-5.000, 155.000] Z [46.000, 58.000]

Overall 160.000 x 160.000 x 12.000; material 6061-T651; exact STEP: B06-104-LOAD-FLANGE.step

Assembly origin: X0 centreline; Y75 arm axis; Z0 tabletop. Ordinate features below use these datums.

Metal general linear +/-0.10; hole centres +/-0.10; cut silicone +/-0.50; threads as called out; deburr R0.5.

CNC turn/mill + drill/tap; clear anodize, mask datums
OD160/ID56 x12; upper mating datum Z58 flatness0.1; 8xM6 PCD120 phase22.5deg; interface-contract.json governs
Bottom open cable pocket X±17/Y28..83/Z46..48; breaks into central bore
No motor dependency: independent test adapter or arm module fits this same base interface

FEATURES: entry X/Y/Z ; axis ; bore/depth ; machining callout


55.433/97.961/46.000 ; [0/0/1] ; D5.000 x 12.000 ; M6x1-6H THRU; PCD120, 22.5deg + k45deg
22.961/130.433/46.000 ; [0/0/1] ; D5.000 x 12.000 ; M6x1-6H THRU; PCD120, 22.5deg + k45deg
-22.961/130.433/46.000 ; [0/0/1] ; D5.000 x 12.000 ; M6x1-6H THRU; PCD120, 22.5deg + k45deg
-55.433/97.961/46.000 ; [0/0/1] ; D5.000 x 12.000 ; M6x1-6H THRU; PCD120, 22.5deg + k45deg
-55.433/52.039/46.000 ; [0/0/1] ; D5.000 x 12.000 ; M6x1-6H THRU; PCD120, 22.5deg + k45deg
-22.961/19.567/46.000 ; [0/0/1] ; D5.000 x 12.000 ; M6x1-6H THRU; PCD120, 22.5deg + k45deg
22.961/19.567/46.000 ; [0/0/1] ; D5.000 x 12.000 ; M6x1-6H THRU; PCD120, 22.5deg + k45deg
55.433/52.039/46.000 ; [0/0/1] ; D5.000 x 12.000 ; M6x1-6H THRU; PCD120, 22.5deg + k45deg
-60.000/75.000/46.000 ; [0/0/1] ; D8.500 x 12.000 ; D8.5 THRU
-60.000/75.000/58.000 ; [0/0/-1] ; D14.500 x 8.500 ; TOP CBORE D14.5 x8.5; M8x16 ISO4762; underhead Z49.5
60.000/75.000/46.000 ; [0/0/1] ; D8.500 x 12.000 ; D8.5 THRU
60.000/75.000/58.000 ; [0/0/-1] ; D14.500 x 8.500 ; TOP CBORE D14.5 x8.5; M8x16 ISO4762; underhead Z49.5
-38.000/120.000/46.000 ; [0/0/1] ; D8.500 x 12.000 ; D8.5 THRU
-38.000/120.000/58.000 ; [0/0/-1] ; D14.500 x 8.500 ; TOP CBORE D14.5 x8.5; M8x16 ISO4762; underhead Z49.5
38.000/120.000/46.000 ; [0/0/1] ; D8.500 x 12.000 ; D8.5 THRU
38.000/120.000/58.000 ; [0/0/-1] ; D14.500 x 8.500 ; TOP CBORE D14.5 x8.5; M8x16 ISO4762; underhead Z49.5

REVIEW CANDIDATE - NOT COMPLETE BASE MANUFACTURING RELEASE


Units mm. Do not scale drawing. Exact STEP profile governs. Sheet 4/15

B06-105-POST-1


TOP XY - fitted view (NTS)

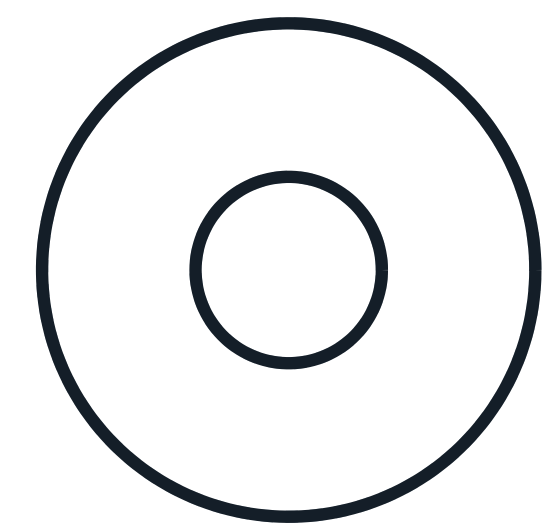

FRONT XZ - fitted view (NTS)

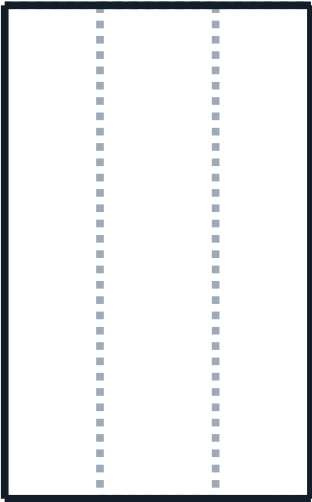

SIDE YZ - fitted view (NTS)

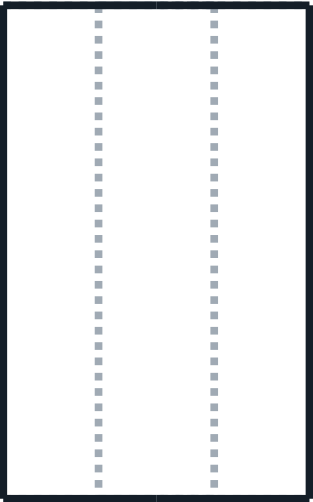

ENVELOPE / GLOBAL ASSEMBLY DATUM

X [-69.000, -51.000] Y [66.000, 84.000] Z [17.000, 46.000]

Overall 18.000 x 18.000 x 29.000; material 6061-T651; exact STEP: B06-105-POST-1.step

Assembly origin: X0 centreline; Y75 arm axis; Z0 tabletop. Ordinate features below use these datums.

Metal general linear +/-0.10; hole centres +/-0.10; cut silicone +/-0.50; threads as called out; deburr R0.5.

Turn + through drill/tap

Four identical OD18 x29 spacers; ends parallel0.05


M8 full through thread; top bolt engagement12.5, bottom13.5 mm; nominal tip gap3.0 mm

FEATURES: entry X/Y/Z ; axis ; bore/depth ; machining callout

-60.000/75.000/17.000 ; [0/0/1] ; D6.800 x 29.000 ; M8x1.25-6H THRU; ends chamfer0.5

B06-106-DESK-PAD

TOP XY - fitted view (NTS)

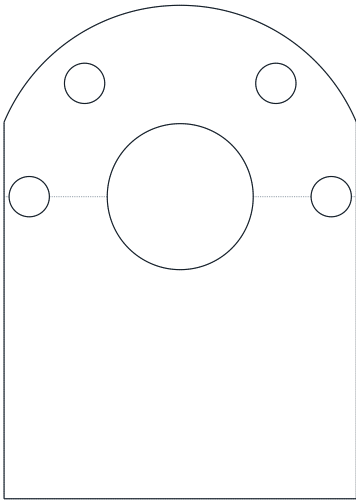

FRONT XZ - fitted view (NTS)



SIDE YZ - fitted view (NTS)



ENVELOPE / GLOBAL ASSEMBLY DATUM

X [-70.000, 70.000] Y [-45.000, 151.000] Z [0.000, 2.000]

Overall 140.000 x 196.000 x 2.000; material silicone; exact STEP: B06-106-DESK-PAD.step

Assembly origin: X0 centreline; Y75 arm axis; Z0 tabletop. Ordinate features below use these datums.

Metal general linear +/-0.10; hole centres +/-0.10; cut silicone +/-0.50; threads as called out; deburr R0.5.

Cut 2 mm solid silicone, nominal60A; bond to deck
Friction and desk-surface compression require bench test


FEATURES: entry X/Y/Z ; axis ; bore/depth ; machining callout

B06-107-SPREADER-1

TOP XY - fitted view (NTS)



FRONT XZ - fitted view (NTS)



SIDE YZ - fitted view (NTS)



ENVELOPE / GLOBAL ASSEMBLY DATUM

X [10.000, 80.000] Y [5.000, 95.000] Z [-40.000, -32.000]

Overall 70.000 x 90.000 x 8.000; material 6061-T651; exact STEP: B06-107-SPREADER-1.step

Assembly origin: X0 centreline; Y75 arm axis; Z0 tabletop. Ordinate features below use these datums.

Metal general linear +/-0.10; hole centres +/-0.10; cut silicone +/-0.50; threads as called out; deburr R0.5.

CNC flat plate; R2 edge breaks

Foot bears directly on metal at (X±45,Y50); swivel foot retained by its supplied retaining spring

Place spreader during installation; pad must cover the entire contact footprint


FEATURES: entry X/Y/Z ; axis ; bore/depth ; machining callout

B06-108-PRESS-PAD-1

TOP XY - fitted view (NTS)



FRONT XZ - fitted view (NTS)



SIDE YZ - fitted view (NTS)



ENVELOPE / GLOBAL ASSEMBLY DATUM

X [10.000, 80.000] Y [5.000, 95.000] Z [-32.000, -30.000]

Overall 70.000 x 90.000 x 2.000; material silicone; exact STEP: B06-108-PRESS-PAD-1.step

Assembly origin: X0 centreline; Y75 arm axis; Z0 tabletop. Ordinate features below use these datums.


Metal general linear +/-0.10; hole centres +/-0.10; cut silicone +/-0.50; threads as called out; deburr R0.5.

Cut 2 mm solid silicone60A; bond to spreader


FEATURES: entry X/Y/Z ; axis ; bore/depth ; machining callout

B06-201-HANGER--1

TOP XY - fitted view (NTS)

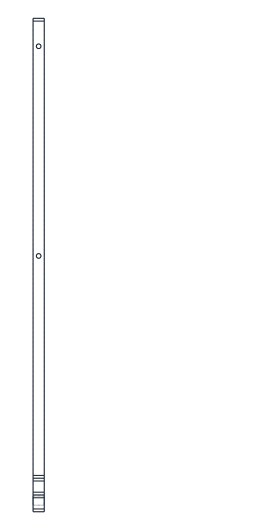

FRONT XZ - fitted view (NTS)

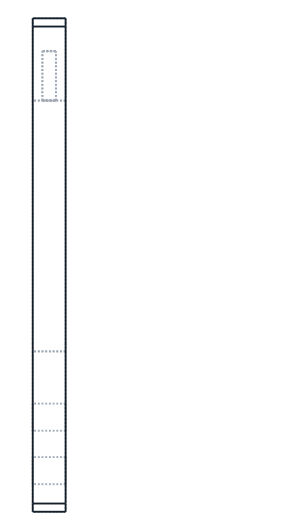

SIDE YZ - fitted view (NTS)



ENVELOPE / GLOBAL ASSEMBLY DATUM

X [-78.000, -70.000] Y [-63.000, 290.000] Z [-177.000, -57.000]

Overall 8.000 x 353.000 x 120.000; material 6061-T651; exact STEP: B06-201-HANGER--1.step

Assembly origin: X0 centreline; Y75 arm axis; Z0 tabletop. Ordinate features below use these datums.

Metal general linear +/-0.10; hole centres +/-0.10; cut silicone +/-0.50; threads as called out; deburr R0.5.

CNC profile from8 mm plate + drill/tap
Inward cantilever height20 mm; remove hanger independently of desk clamp; deburr R0.5

FEATURES: entry X/Y/Z ; axis ; bore/depth ; machining callout

- 78.000/-55.000/-80.000 ; [1/0/0] ; D6.600 x 8.000 ; D6.6 THRU; M6x20 + washer
- 78.000/-55.000/-67.000 ; [1/0/0] ; D6.600 x 8.000 ; D6.6 THRU; M6x20 + washer
- 74.000/120.000/-157.000 ; [0/0/-1] ; D3.300 x 12.000 ; M4x0.7-6H; full thread9; drill12; tray attachment
- 74.000/270.000/-157.000 ; [0/0/-1] ; D3.300 x 12.000 ; M4x0.7-6H; full thread9; drill12; tray attachment

B06-201-HANGER-1

TOP XY - fitted view (NTS)



FRONT XZ - fitted view (NTS)



SIDE YZ - fitted view (NTS)



ENVELOPE / GLOBAL ASSEMBLY DATUM

X [70.000, 78.000] Y [-63.000, 290.000] Z [-177.000, -57.000]

Overall 8.000 x 353.000 x 120.000; material 6061-T651; exact STEP: B06-201-HANGER-1.step

Assembly origin: X0 centreline; Y75 arm axis; Z0 tabletop. Ordinate features below use these datums.

Metal general linear +/-0.10; hole centres +/-0.10; cut silicone +/-0.50; threads as called out; deburr R0.5.

CNC profile from8 mm plate + drill/tap
Inward cantilever height20 mm; remove hanger independently of desk clamp; deburr R0.5


FEATURES: entry X/Y/Z ; axis ; bore/depth ; machining callout

- 78.000/-55.000/-80.000 ; [-1/0/0] ; D6.600 x 8.000 ; D6.6 THRU; M6x20 + washer
- 78.000/-55.000/-67.000 ; [-1/0/0] ; D6.600 x 8.000 ; D6.6 THRU; M6x20 + washer
- 74.000/120.000/-157.000 ; [0/0/-1] ; D3.300 x 12.000 ; M4x0.7-6H; full thread9; drill12; tray attachment
- 74.000/270.000/-157.000 ; [0/0/-1] ; D3.300 x 12.000 ; M4x0.7-6H; full thread9; drill12; tray attachment

AUROMIX / ODRADEK | B06-LOAD-02-STANDALONE

B06-202-TRAY

TOP XY - fitted view (NTS)

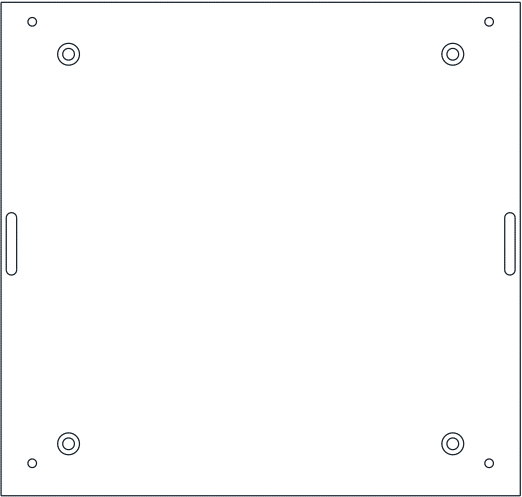

FRONT XZ - fitted view (NTS)



SIDE YZ - fitted view (NTS)



ENVELOPE / GLOBAL ASSEMBLY DATUM

X [-100.000, 100.000] Y [100.000, 290.000] Z [-157.000, -152.000]

Overall 200.000 x 190.000 x 5.000; material 6061-T651; exact STEP: B06-202-TRAY.step

Assembly origin: X0 centreline; Y75 arm axis; Z0 tabletop. Ordinate features below use these datums.

Metal general linear +/-0.10; hole centres +/-0.10; cut silicone +/-0.50; threads as called out; deburr R0.5.

CNC profile + drill/tap
Confirmed maximum box180x150x50 mm/3 kg; footprint X±90,Y120..270; slides +Y
20 mm hook/loop straps secure vertically; front stop removable; ventilation not covered by this mechanical budget

FEATURES: entry X/Y/Z ; axis ; bore/depth ; machining callout

- 74.000/120.000/-157.000 ; [0/0/1] ; D4.500 x 5.000 ; D4.5 THRU; M4x10 ISO7380-1; NO washer
- 74.000/120.000/-152.000 ; [0/0/-1] ; D8.400 x 3.000 ; TOP CBORE D8.4 x3; head top Z-152.8 below box seat; floor2 mm
- 74.000/270.000/-157.000 ; [0/0/1] ; D4.500 x 5.000 ; D4.5 THRU; M4x10 ISO7380-1; NO washer
- 74.000/270.000/-152.000 ; [0/0/-1] ; D8.400 x 3.000 ; TOP CBORE D8.4 x3; head top Z-152.8 below box seat; floor2 mm
- 74.000/120.000/-157.000 ; [0/0/1] ; D4.500 x 5.000 ; D4.5 THRU; M4x10 ISO7380-1; NO washer
- 74.000/120.000/-152.000 ; [0/0/-1] ; D8.400 x 3.000 ; TOP CBORE D8.4 x3; head top Z-152.8 below box seat; floor2 mm
- 74.000/270.000/-157.000 ; [0/0/1] ; D4.500 x 5.000 ; D4.5 THRU; M4x10 ISO7380-1; NO washer
- 74.000/270.000/-152.000 ; [0/0/-1] ; D8.400 x 3.000 ; TOP CBORE D8.4 x3; head top Z-152.8 below box seat; floor2 mm
- 96.000/197.000/-157.000 ; [] ; profile slot ; 4x24 vertical strap slot R2 THRU
- 96.000/197.000/-157.000 ; [] ; profile slot ; 4x24 vertical strap slot R2 THRU
- 88.000/112.500/-157.000 ; [0/0/1] ; D3.300 x 5.000 ; M4x0.7-6H THRU; stop M4x20
- 88.000/112.500/-157.000 ; [0/0/1] ; D3.300 x 5.000 ; M4x0.7-6H THRU; stop M4x20
- 88.000/282.500/-157.000 ; [0/0/1] ; D3.300 x 5.000 ; M4x0.7-6H THRU; stop M4x20
- 88.000/282.500/-157.000 ; [0/0/1] ; D3.300 x 5.000 ; M4x0.7-6H THRU; stop M4x20

REVIEW CANDIDATE - NOT COMPLETE BASE MANUFACTURING RELEASE

Units mm. Do not scale drawing. Exact STEP profile governs. Sheet 11/15

AUROMIX / ODRADEK | B06-LOAD-02-STANDALONE

B06-203-STOP-BACK


TOP XY - fitted view (NTS)



FRONT XZ - fitted view (NTS)



SIDE YZ - fitted view (NTS)

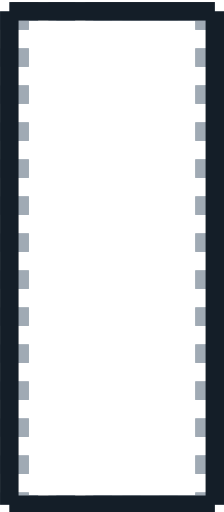

ENVELOPE / GLOBAL ASSEMBLY DATUM

X [-95.000, 95.000] Y [110.000, 115.000] Z [-152.000, -140.000]

Overall 190.000 x 5.000 x 12.000; material 6061-T651; exact STEP: B06-203-STOP-BACK.step

Assembly origin: X0 centreline; Y75 arm axis; Z0 tabletop. Ordinate features below use these datums.

Metal general linear +/-0.10; hole centres +/-0.10; cut silicone +/-0.50; threads as called out; deburr R0.5.

Mill/drill

Front stop removes before box slides toward +Y

FEATURES: entry X/Y/Z ; axis ; bore/depth ; machining callout

-88.000/112.500/-152.000 ; [0/0/1] ; D4.500 x 12.000 ; D4.5 THRU; M4x20

88.000/112.500/-152.000 ; [0/0/1] ; D4.500 x 12.000 ; D4.5 THRU; M4x20

B06-203-STOP-FRONT


TOP XY - fitted view (NTS)



FRONT XZ - fitted view (NTS)



SIDE YZ - fitted view (NTS)

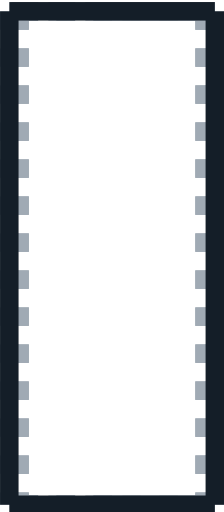

ENVELOPE / GLOBAL ASSEMBLY DATUM

X [-95.000, 95.000] Y [280.000, 285.000] Z [-152.000, -140.000]

Overall 190.000 x 5.000 x 12.000; material 6061-T651; exact STEP: B06-203-STOP-FRONT.step

Assembly origin: X0 centreline; Y75 arm axis; Z0 tabletop. Ordinate features below use these datums.

Metal general linear +/-0.10; hole centres +/-0.10; cut silicone +/-0.50; threads as called out; deburr R0.5.

Mill/drill

Front stop removes before box slides toward +Y


FEATURES: entry X/Y/Z ; axis ; bore/depth ; machining callout

-88.000/282.500/-152.000 ; [0/0/1] ; D4.500 x 12.000 ; D4.5 THRU; M4x20


88.000/282.500/-152.000 ; [0/0/1] ; D4.500 x 12.000 ; D4.5 THRU; M4x20

B06-309-COAX-BRACKET


TOP XY - fitted view (NTS)

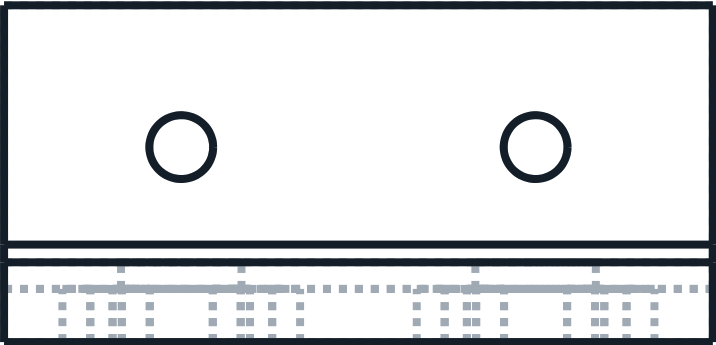

FRONT XZ - fitted view (NTS)

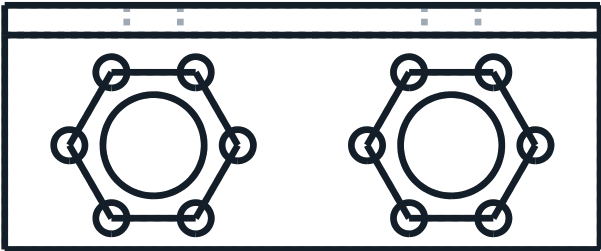

SIDE YZ - fitted view (NTS)

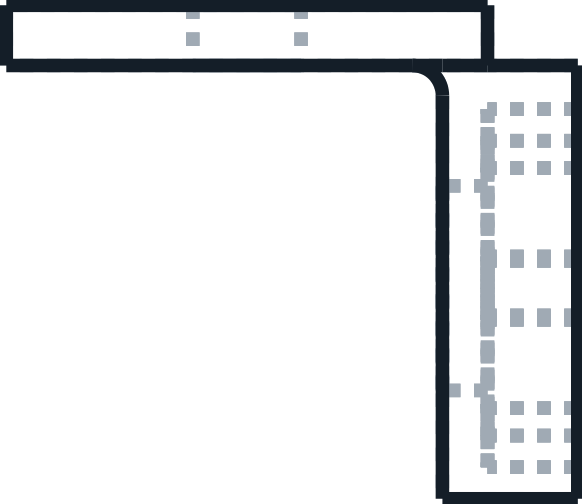

ENVELOPE / GLOBAL ASSEMBLY DATUM

X [-20.000, 20.000] Y [-19.000, 0.000] Z [25.600, 42.000]

Overall 40.000 x 19.000 x 16.400; material 6061-T651; exact STEP: B06-309-COAX-BRACKET.step

Assembly origin: X0 centreline; Y75 arm axis; Z0 tabletop. Ordinate features below use these datums.

Metal general linear +/-0.10; hole centres +/-0.10; cut silicone +/-0.50; threads as called out; deburr R0.5.

CNC mill original RF bulkhead bracket

Base2 mm at PCB top Z25.6; rear panel4.5 mm Y-19..-14.5; flange bearing face Y-16, internal fillet R1

H5/H6 mounting centres X±10,Y-8; coax axes X±10,Z35; mounts independent of cosmetic rear lid

Fixed coax rear datum retained at Y-16, separate from RJ45/power PCB shift; bond to chassis via J6 lug

FEATURES: entry X/Y/Z ; axis ; bore/depth ; machining callout

-10.000/-8.000/25.600 ; [0/0/1] ; D3.600 x 2.000 ; D3.6 THRU; M3x8 + washer0.5 + nut below PCB

-10.000/-19.000/35.000 ; [0/1/0] ; D6.800 x 4.500 ; D6.8 round THRU; external flange captured in hex pocket

-10.000/-19.000/35.000 ; [0/1/0] ; D9.800 x 3.000 ; AF9.8 rear HEX pocket depth3, six R1.05 corner reliefs; flange seat Y-16; source nominal AF9.5

10.000/-8.000/25.600 ; [0/0/1] ; D3.600 x 2.000 ; D3.6 THRU; M3x8 + washer0.5 + nut below PCB

10.000/-19.000/35.000 ; [0/1/0] ; D6.800 x 4.500 ; D6.8 round THRU; external flange captured in hex pocket

10.000/-19.000/35.000 ; [0/1/0] ; D9.800 x 3.000 ; AF9.8 rear HEX pocket depth3, six R1.05 corner reliefs; flange seat Y-16; source nominal AF9.5

AUROMIX / ODRADEK | B06-LOAD-02-STANDALONE

W01 WELDMENT / PURCHASED HARDWARE / RELEASE GATES

W01 consists of B06-101 deck, B06-102 rear web, B06-103 lower jaw; STEP assembly gives nominal position.

Web top Z2 touches deck bottom Z2; web bottom Z-90 touches jaw top Z-90. NO overlapping plates.

Continuous steel fillet weld, leg size z6 (nominal throat 4.24), both accessible sides of each plate joint.

Do not weld desk pad face, clamp threaded bores or shelf tapped holes. Keep front upper fillet within Y-51..-45.

Weld beads NOT represented by CAD solids; welding procedure, inspection and distortion control pending.

Fixture assembly; weld sequence/stress relief agreed with fabricator; machine designated datums after weld.

Bought clamp screws: 2x Ganter DIN6332-M12-100-SK (AF6); feet: 2x DIN6311-25-S with snap ring.

Foot flat D25 face points UP to aluminium spreader. Supplier swivel bore/pin seat is envelope only; sample fit required.

Main flange/post bolts: 4x ISO4762 M8x16 top; 4x M8x20 bottom; thread engagements12.5/13.5 mm; nominal tip gap3 mm.

Shelf mounts: 4x M6x20 + washers; tray:4x M4x10 in D8.4x3 counterbores, no washer; stops:4x M4x20. Standard-hardware static audit passes; physical seats/tools still require samples.

No printed cosmetic part transmits motor load or clamp preload. Never replace steel threaded jaw with printed polymer.

Desk thickness budget15..60; controller box budget180x150x50,3kg; box removes toward desk interior (+Y).

Base flange follows interface-contract.json independently of any arm; T01 test plate8mm + washer1.6mm gives10.4mm engagement with M6x20.

Native IO PCB Gerber/IPC356 exists separately; passive board is not an EtherCAT master/ESC or GMSL decoder.

Remaining gates: full bolts/tools/weld clearance; material/load screening; LED PCB/power; cable bend/strain relief; slicing.

After coordinated files pass: unpowered prototype build and inspection, then restrained desk/thermal/electrical tests.

This document supports design review and fabricator DFM discussion. Do not order a complete base using this file alone.