


R5 / shaped luminous gripping faces

Four-petal orthographic form study | all four at the same scale | no head or drive assembly

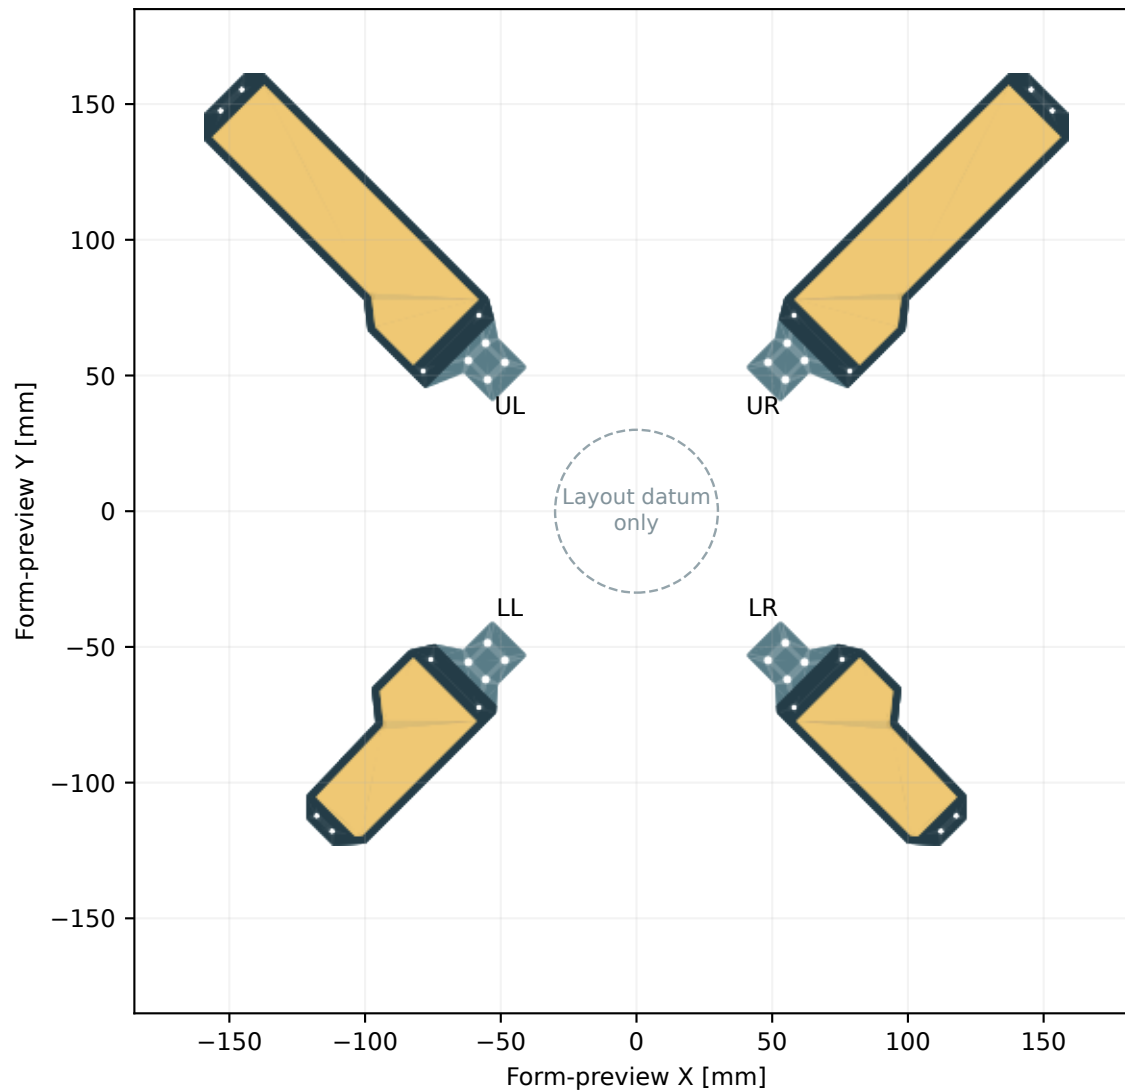


Upper: long near-constant-width wing, stepped shoulder, chamfered flat tip. Lower: shorter shoulder and truncated tip.

Gold area is the compliant illuminated contact face. Left-hand shapes are real mirror parts; conductive PCBs are not mirrored.


Contour parameters / right-hand parts

UPPER

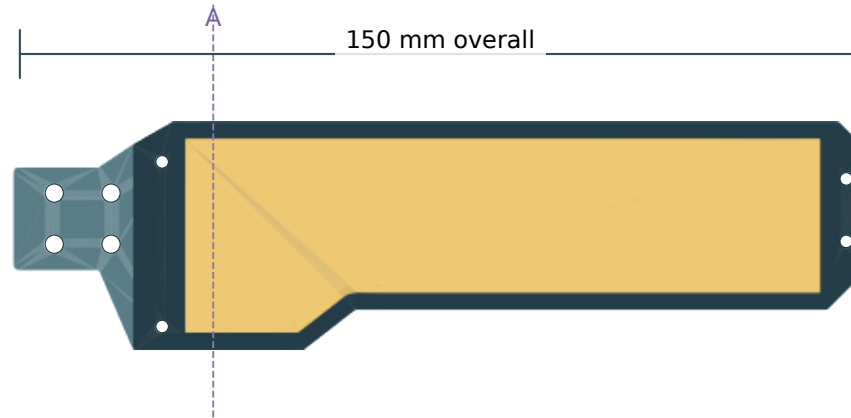

Width 40.0
Root 18.0
Stack 9.5
4 x D3.2 root
4 x D2.2 bezel
D4.2 x90deg CSK



LOWER

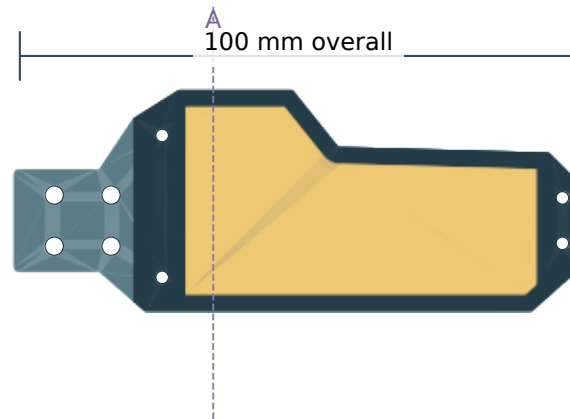

Width 39.0
Root 18.0
Stack 9.5
4 x D3.2 root
4 x D2.2 bezel
D4.2 x90deg CSK

Nominal contour corner R0.8. Shoulder stations and all contour vertices are in parameters.json / profiles.dxf.
Root holes are candidate flat-interface bores, not a released hinge. Fasteners, fits and process radii require review.

Luminous face load path / nominal sections

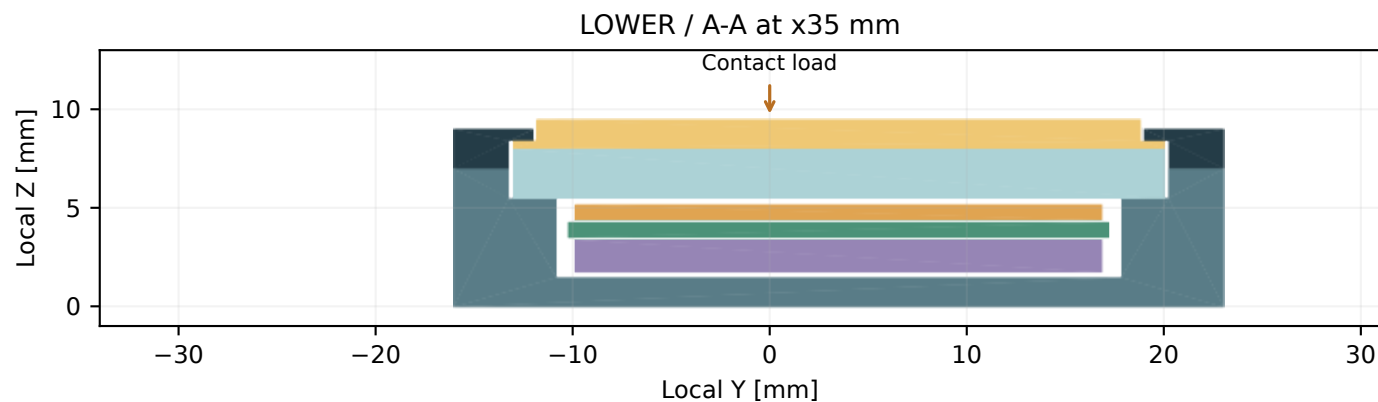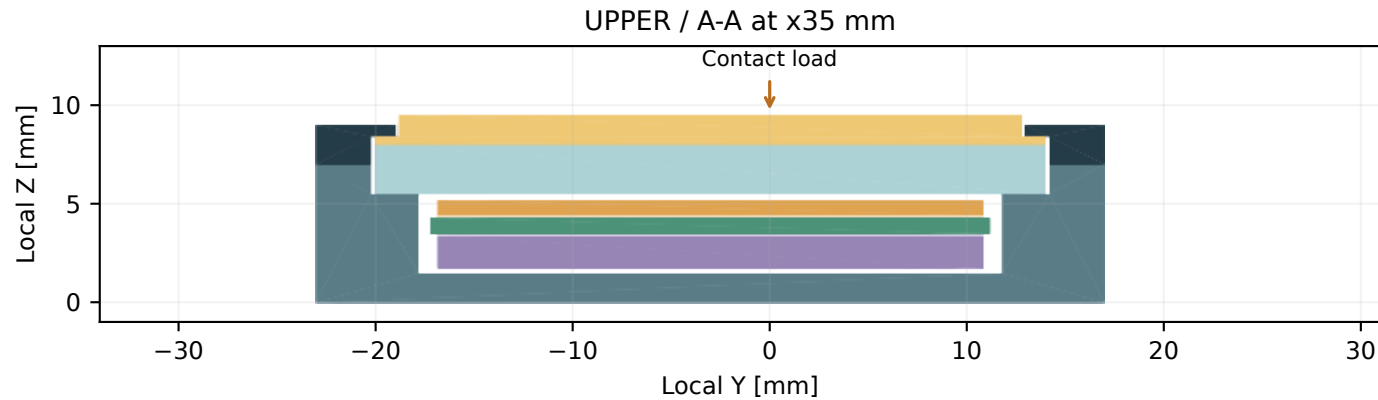

Z stack [mm]

- 9.5 compliant contact surface
- 9.0 metal bezel front
- 8.4 captured skin flange
- 8.0 PC cover front
- 5.5 cover support shelf
- 5.2 LED envelope limit
- 4.3 PCB top / 3.5 bottom
- 1.75 back-component limit
- 1.5 integral floor top
- 0.0 frame back

Object -> skin -> PC cover
-> perimeter shelf -> frame
-> candidate root attachment

Electronics carry no intended gripping reaction. Clearances are nominal and undeformed.

Transparent cover spans the cavity and seats on a perimeter ledge. Skin flange has zero nominal preload. Retention, friction, cover deflection, fatigue, optical uniformity and 1-second motion remain unqualified.