


B06-101-LOAD-DECK

TOP XY - fitted view (NTS)



FRONT XZ - fitted view (NTS)

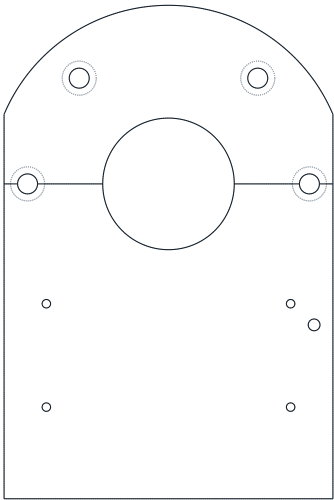

SIDE YZ - fitted view (NTS)



ENVELOPE / GLOBAL ASSEMBLY DATUM

X [-70.000, 70.000] Y [-59.000, 151.000] Z [2.000, 17.000]

Overall 140.000 x 210.000 x 15.000; material S355; exact STEP: B06-101-LOAD-DECK.step

Assembly origin: X0 centreline; Y75 arm axis; Z0 tabletop. Ordinate features below use these datums.

Metal general linear +/-0.10; hole centres +/-0.10; cut silicone +/-0.50; threads as called out; deburr R0.5.

CNC profile and drill/counterbore; weld assembly B06-W01  
15 mm finished thickness; rear Y-59, table rear edge Y-45; corners deburr R0.5  
Datum A upper Z17; flatness0.15 after welding; no polymer carries arm preload

FEATURES: entry X/Y/Z ; axis ; bore/depth ; machining callout


0.000/75.000/2.000 ; [0/0/1] ; D56.000 x 15.000 ; D56 THRU; harness passage  
-60.000/75.000/2.000 ; [0/0/1] ; D8.500 x 15.000 ; D8.5 THRU  
-60.000/75.000/2.000 ; [0/0/1] ; D14.500 x 8.500 ; BOTTOM CBORE D14.5 x8.5; M8x20 ISO4762; underhead Z10.5  
60.000/75.000/2.000 ; [0/0/1] ; D8.500 x 15.000 ; D8.5 THRU  
60.000/75.000/2.000 ; [0/0/1] ; D14.500 x 8.500 ; BOTTOM CBORE D14.5 x8.5; M8x20 ISO4762; underhead Z10.5  
-38.000/120.000/2.000 ; [0/0/1] ; D8.500 x 15.000 ; D8.5 THRU  
-38.000/120.000/2.000 ; [0/0/1] ; D14.500 x 8.500 ; BOTTOM CBORE D14.5 x8.5; M8x20 ISO4762; underhead Z10.5  
38.000/120.000/2.000 ; [0/0/1] ; D8.500 x 15.000 ; D8.5 THRU  
38.000/120.000/2.000 ; [0/0/1] ; D14.500 x 8.500 ; BOTTOM CBORE D14.5 x8.5; M8x20 ISO4762; underhead Z10.5  
-52.000/-20.000/2.000 ; [0/0/1] ; D3.600 x 15.000 ; D3.6 THRU; clearance for PCB screw tip, no electrical board contact  
-52.000/24.000/2.000 ; [0/0/1] ; D3.600 x 15.000 ; D3.6 THRU; clearance for PCB screw tip, no electrical board contact  
52.000/-20.000/2.000 ; [0/0/1] ; D3.600 x 15.000 ; D3.6 THRU; clearance for PCB screw tip, no electrical board contact  
52.000/24.000/2.000 ; [0/0/1] ; D3.600 x 15.000 ; D3.6 THRU; clearance for PCB screw tip, no electrical board contact  
62.000/15.000/17.000 ; [0/0/-1] ; D5.000 x 12.000 ; M6x1-6H; full thread9; drill12; dedicated chassis bonding point

B06-102-REAR-WEB

TOP XY - fitted view (NTS)



FRONT XZ - fitted view (NTS)

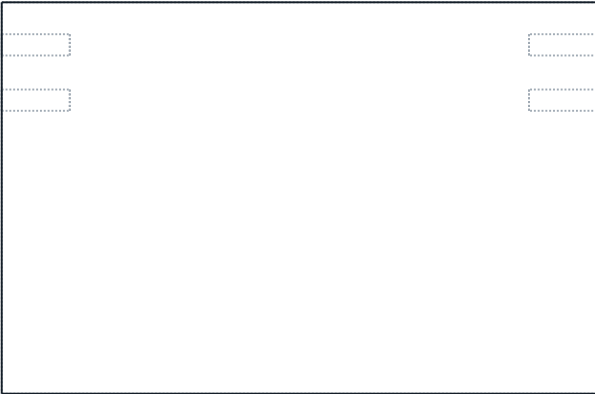

SIDE YZ - fitted view (NTS)



ENVELOPE / GLOBAL ASSEMBLY DATUM

X [-70.000, 70.000] Y [-59.000, -51.000] Z [-90.000, 2.000]

Overall 140.000 x 8.000 x 92.000; material S355; exact STEP: B06-102-REAR-WEB.step

Assembly origin: X0 centreline; Y75 arm axis; Z0 tabletop. Ordinate features below use these datums.

Metal general linear +/-0.10; hole centres +/-0.10; cut silicone +/-0.50; threads as called out; deburr R0.5.


CNC plate profile/drill/tap; weld B06-W01  
8 mm thickness; top Z2; rear Y-59; Four z5 continuous fillets; leg5.0..5.5 clearance envelope at upper and lower plate joints  
Front fillet nominal toe Y-46, maximum envelope Y-45.5; nominal desk edgeY-45; machine datums after weld/stress relief; no weld in desk pad seat

FEATURES: entry X/Y/Z ; axis ; bore/depth ; machining callout

-70.000/-55.000/-80.000 ; [1/0/0] ; D5.000 x 16.000 ; M6x1-6H; full thread13; drill16; shelf hanger  
-70.000/-55.000/-67.000 ; [1/0/0] ; D5.000 x 16.000 ; M6x1-6H; full thread13; drill16; shelf hanger  
70.000/-55.000/-80.000 ; [-1/0/0] ; D5.000 x 16.000 ; M6x1-6H; full thread13; drill16; shelf hanger  
70.000/-55.000/-67.000 ; [-1/0/0] ; D5.000 x 16.000 ; M6x1-6H; full thread13; drill16; shelf hanger

B06-103-LOWER-JAW

TOP XY - fitted view (NTS)

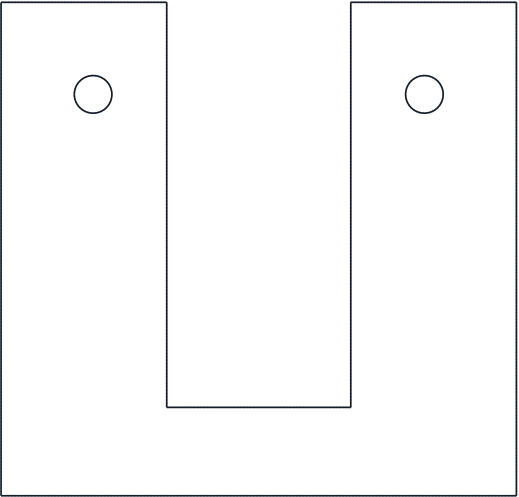

FRONT XZ - fitted view (NTS)



SIDE YZ - fitted view (NTS)



ENVELOPE / GLOBAL ASSEMBLY DATUM

X [-70.000, 70.000] Y [-59.000, 75.000] Z [-104.000, -90.000]

Overall 140.000 x 134.000 x 14.000; material S355; exact STEP: B06-103-LOWER-JAW.step

Assembly origin: X0 centreline; Y75 arm axis; Z0 tabletop. Ordinate features below use these datums.

Metal general linear +/-0.10; hole centres +/-0.10; cut silicone +/-0.50; threads as called out; deburr R0.5.


CNC profile/drill/tap; weld B06-W01  
14 mm finished thickness; two full steel threaded legs  
M12 thrust screws turn from BELOW with AF6 key; no side knob hidden behind the box

FEATURES: entry X/Y/Z ; axis ; bore/depth ; machining callout

-45.000/50.000/-104.000 ; [0/0/1] ; D10.200 x 14.000 ; M12x1.75-6H THRU; deburr both entries0.5; DIN6332 M12x100  
45.000/50.000/-104.000 ; [0/0/1] ; D10.200 x 14.000 ; M12x1.75-6H THRU; deburr both entries0.5; DIN6332 M12x100

B06-104-LOAD-FLANGE

TOP XY - fitted view (NTS)

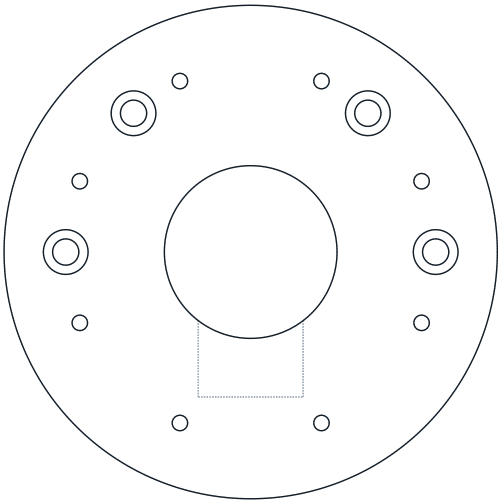

FRONT XZ - fitted view (NTS)



SIDE YZ - fitted view (NTS)



ENVELOPE / GLOBAL ASSEMBLY DATUM

X [-80.000, 80.000] Y [-5.000, 155.000] Z [46.000, 58.000]

Overall 160.000 x 160.000 x 12.000; material 6061-T651; exact STEP: B06-104-LOAD-FLANGE.step

Assembly origin: X0 centreline; Y75 arm axis; Z0 tabletop. Ordinate features below use these datums.

Metal general linear +/-0.10; hole centres +/-0.10; cut silicone +/-0.50; threads as called out; deburr R0.5.


CNC turn/mill + drill/tap; clear anodize, mask datums  
OD160/ID56 x12; upper mating datum Z58 flatness0.1; 8xM6 PCD120 phase22.5deg; interface-contract.json governs  
Bottom open cable pocket X±17/Y28..83/Z46..48; breaks into central bore  
No motor dependency: independent test adapter or arm module fits this same base interface

FEATURES: entry X/Y/Z ; axis ; bore/depth ; machining callout


55.433/97.961/46.000 ; [0/0/1] ; D5.000 x 12.000 ; M6x1-6H THRU; PCD120, 22.5deg + k45deg  
22.961/130.433/46.000 ; [0/0/1] ; D5.000 x 12.000 ; M6x1-6H THRU; PCD120, 22.5deg + k45deg  
-22.961/130.433/46.000 ; [0/0/1] ; D5.000 x 12.000 ; M6x1-6H THRU; PCD120, 22.5deg + k45deg  
-55.433/97.961/46.000 ; [0/0/1] ; D5.000 x 12.000 ; M6x1-6H THRU; PCD120, 22.5deg + k45deg  
-55.433/52.039/46.000 ; [0/0/1] ; D5.000 x 12.000 ; M6x1-6H THRU; PCD120, 22.5deg + k45deg  
-22.961/19.567/46.000 ; [0/0/1] ; D5.000 x 12.000 ; M6x1-6H THRU; PCD120, 22.5deg + k45deg  
22.961/19.567/46.000 ; [0/0/1] ; D5.000 x 12.000 ; M6x1-6H THRU; PCD120, 22.5deg + k45deg  
55.433/52.039/46.000 ; [0/0/1] ; D5.000 x 12.000 ; M6x1-6H THRU; PCD120, 22.5deg + k45deg  
-60.000/75.000/46.000 ; [0/0/1] ; D8.500 x 12.000 ; D8.5 THRU  
-60.000/75.000/58.000 ; [0/0/-1] ; D14.500 x 8.500 ; TOP CBORE D14.5 x8.5; M8x16 ISO4762; underhead Z49.5  
60.000/75.000/46.000 ; [0/0/1] ; D8.500 x 12.000 ; D8.5 THRU  
60.000/75.000/58.000 ; [0/0/-1] ; D14.500 x 8.500 ; TOP CBORE D14.5 x8.5; M8x16 ISO4762; underhead Z49.5  
-38.000/120.000/46.000 ; [0/0/1] ; D8.500 x 12.000 ; D8.5 THRU  
-38.000/120.000/58.000 ; [0/0/-1] ; D14.500 x 8.500 ; TOP CBORE D14.5 x8.5; M8x16 ISO4762; underhead Z49.5  
38.000/120.000/46.000 ; [0/0/1] ; D8.500 x 12.000 ; D8.5 THRU  
38.000/120.000/58.000 ; [0/0/-1] ; D14.500 x 8.500 ; TOP CBORE D14.5 x8.5; M8x16 ISO4762; underhead Z49.5

B06-105-POST-1


TOP XY - fitted view (NTS)

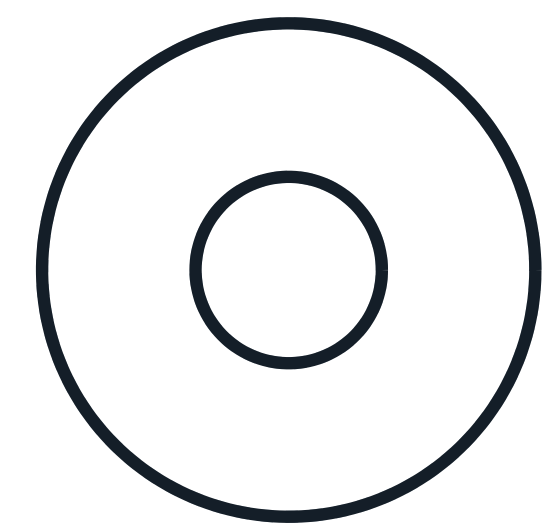

FRONT XZ - fitted view (NTS)

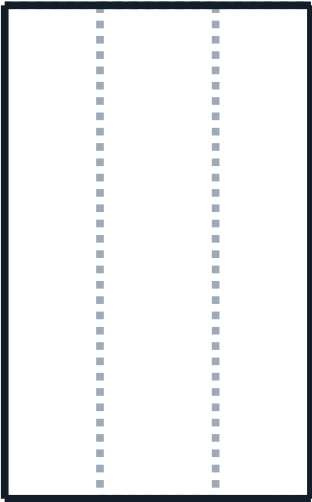

SIDE YZ - fitted view (NTS)

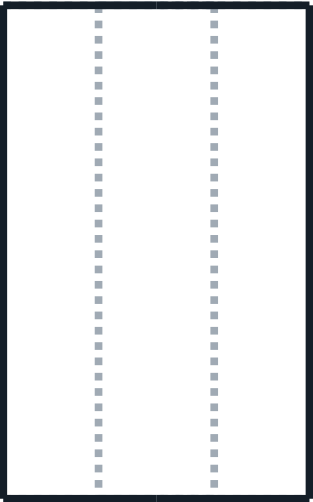

ENVELOPE / GLOBAL ASSEMBLY DATUM

X [-69.000, -51.000] Y [66.000, 84.000] Z [17.000, 46.000]

Overall 18.000 x 18.000 x 29.000; material 6061-T651; exact STEP: B06-105-POST-1.step

Assembly origin: X0 centreline; Y75 arm axis; Z0 tabletop. Ordinate features below use these datums.

Metal general linear +/-0.10; hole centres +/-0.10; cut silicone +/-0.50; threads as called out; deburr R0.5.

Turn + through drill/tap

Four identical OD18 x29 spacers; ends parallel0.05


M8 full through thread; top bolt engagement12.5, bottom13.5 mm; nominal tip gap3.0 mm

FEATURES: entry X/Y/Z ; axis ; bore/depth ; machining callout

-60.000/75.000/17.000 ; [0/0/1] ; D6.800 x 29.000 ; M8x1.25-6H THRU; ends chamfer0.5

B06-106-DESK-PAD

TOP XY - fitted view (NTS)

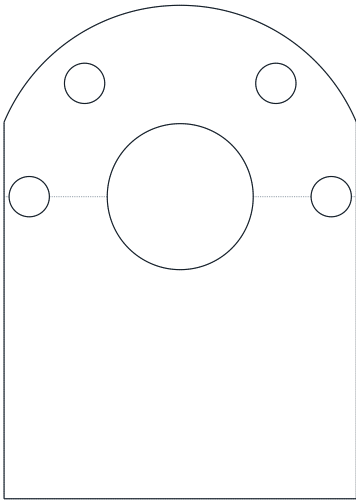

FRONT XZ - fitted view (NTS)



SIDE YZ - fitted view (NTS)



ENVELOPE / GLOBAL ASSEMBLY DATUM

X [-70.000, 70.000] Y [-45.000, 151.000] Z [0.000, 2.000]

Overall 140.000 x 196.000 x 2.000; material silicone; exact STEP: B06-106-DESK-PAD.step

Assembly origin: X0 centreline; Y75 arm axis; Z0 tabletop. Ordinate features below use these datums.

Metal general linear +/-0.10; hole centres +/-0.10; cut silicone +/-0.50; threads as called out; deburr R0.5.

Cut 2 mm solid silicone, nominal60A; bond to deck  
Friction and desk-surface compression require bench test


FEATURES: entry X/Y/Z ; axis ; bore/depth ; machining callout

B06-107-SPREADER-1

TOP XY - fitted view (NTS)



FRONT XZ - fitted view (NTS)



SIDE YZ - fitted view (NTS)



ENVELOPE / GLOBAL ASSEMBLY DATUM

X [10.000, 80.000] Y [5.000, 95.000] Z [-40.000, -32.000]

Overall 70.000 x 90.000 x 8.000; material 6061-T651; exact STEP: B06-107-SPREADER-1.step

Assembly origin: X0 centreline; Y75 arm axis; Z0 tabletop. Ordinate features below use these datums.

Metal general linear +/-0.10; hole centres +/-0.10; cut silicone +/-0.50; threads as called out; deburr R0.5.

CNC flat plate; R2 edge breaks

Foot bears directly on metal at (X±45,Y50); swivel foot retained by its supplied retaining spring

Place spreader during installation; pad must cover the entire contact footprint


FEATURES: entry X/Y/Z ; axis ; bore/depth ; machining callout

B06-108-PRESS-PAD-1

TOP XY - fitted view (NTS)



FRONT XZ - fitted view (NTS)



SIDE YZ - fitted view (NTS)



ENVELOPE / GLOBAL ASSEMBLY DATUM

X [10.000, 80.000] Y [5.000, 95.000] Z [-32.000, -30.000]

Overall 70.000 x 90.000 x 2.000; material silicone; exact STEP: B06-108-PRESS-PAD-1.step

Assembly origin: X0 centreline; Y75 arm axis; Z0 tabletop. Ordinate features below use these datums.


Metal general linear +/-0.10; hole centres +/-0.10; cut silicone +/-0.50; threads as called out; deburr R0.5.

Cut 2 mm solid silicone60A; bond to spreader


FEATURES: entry X/Y/Z ; axis ; bore/depth ; machining callout

B06-201-HANGER--1


TOP XY - fitted view (NTS)

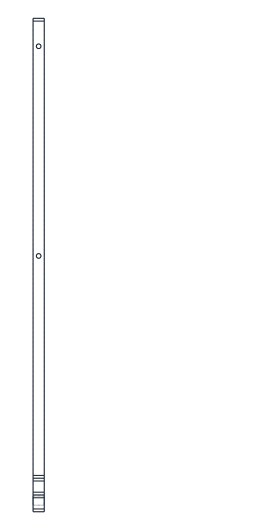

FRONT XZ - fitted view (NTS)

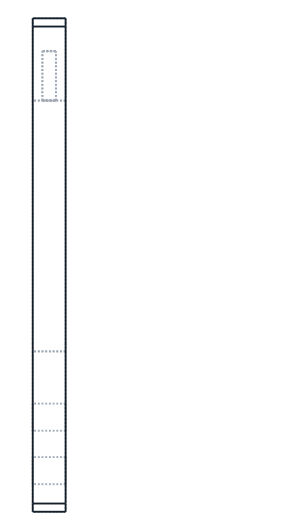

SIDE YZ - fitted view (NTS)

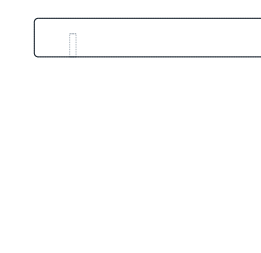

ENVELOPE / GLOBAL ASSEMBLY DATUM

X [-78.000, -70.000] Y [-63.000, 290.000] Z [-177.000, -57.000]

Overall 8.000 x 353.000 x 120.000; material 6061-T651; exact STEP: B06-201-HANGER--1.step

Assembly origin: X0 centreline; Y75 arm axis; Z0 tabletop. Ordinate features below use these datums.

Metal general linear +/-0.10; hole centres +/-0.10; cut silicone +/-0.50; threads as called out; deburr R0.5.

CNC profile from8 mm plate + drill/tap  
Inward cantilever height20 mm; remove hanger independently of desk clamp; deburr R0.5

FEATURES: entry X/Y/Z ; axis ; bore/depth ; machining callout

- 78.000/-55.000/-80.000 ; [1/0/0] ; D6.600 x 8.000 ; D6.6 THRU; M6x20 + washer
- 78.000/-55.000/-67.000 ; [1/0/0] ; D6.600 x 8.000 ; D6.6 THRU; M6x20 + washer
- 74.000/120.000/-157.000 ; [0/0/-1] ; D3.300 x 12.000 ; M4x0.7-6H; full thread9; drill12; tray attachment
- 74.000/270.000/-157.000 ; [0/0/-1] ; D3.300 x 12.000 ; M4x0.7-6H; full thread9; drill12; tray attachment

B06-201-HANGER-1

TOP XY - fitted view (NTS)



FRONT XZ - fitted view (NTS)



SIDE YZ - fitted view (NTS)



ENVELOPE / GLOBAL ASSEMBLY DATUM

X [70.000, 78.000] Y [-63.000, 290.000] Z [-177.000, -57.000]

Overall 8.000 x 353.000 x 120.000; material 6061-T651; exact STEP: B06-201-HANGER-1.step

Assembly origin: X0 centreline; Y75 arm axis; Z0 tabletop. Ordinate features below use these datums.

Metal general linear +/-0.10; hole centres +/-0.10; cut silicone +/-0.50; threads as called out; deburr R0.5.


CNC profile from8 mm plate + drill/tap  
Inward cantilever height20 mm; remove hanger independently of desk clamp; deburr R0.5

FEATURES: entry X/Y/Z ; axis ; bore/depth ; machining callout

- 78.000/-55.000/-80.000 ; [-1/0/0] ; D6.600 x 8.000 ; D6.6 THRU; M6x20 + washer
- 78.000/-55.000/-67.000 ; [-1/0/0] ; D6.600 x 8.000 ; D6.6 THRU; M6x20 + washer
- 74.000/120.000/-157.000 ; [0/0/-1] ; D3.300 x 12.000 ; M4x0.7-6H; full thread9; drill12; tray attachment
- 74.000/270.000/-157.000 ; [0/0/-1] ; D3.300 x 12.000 ; M4x0.7-6H; full thread9; drill12; tray attachment

B06-202-TRAY

TOP XY - fitted view (NTS)

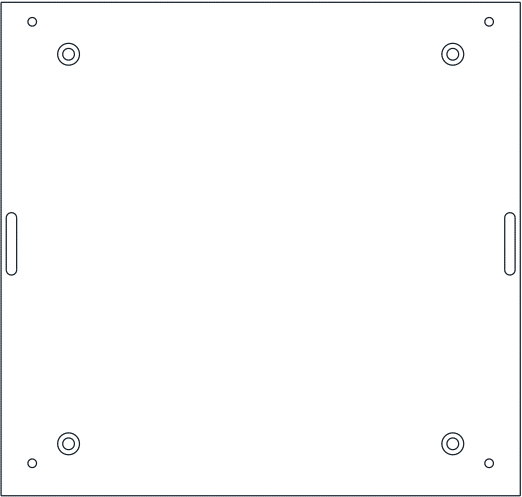

FRONT XZ - fitted view (NTS)



SIDE YZ - fitted view (NTS)



ENVELOPE / GLOBAL ASSEMBLY DATUM

X [-100.000, 100.000] Y [100.000, 290.000] Z [-157.000, -152.000]

Overall 200.000 x 190.000 x 5.000; material 6061-T651; exact STEP: B06-202-TRAY.step

Assembly origin: X0 centreline; Y75 arm axis; Z0 tabletop. Ordinate features below use these datums.

Metal general linear +/-0.10; hole centres +/-0.10; cut silicone +/-0.50; threads as called out; deburr R0.5.

CNC profile + drill/tap  
Confirmed maximum box180x150x50 mm/3 kg; footprint X±90,Y120..270; slides +Y  
20 mm hook/loop straps secure vertically; front stop removable; ventilation not covered by this mechanical budget

FEATURES: entry X/Y/Z ; axis ; bore/depth ; machining callout

- 74.000/120.000/-157.000 ; [0/0/1] ; D4.500 x 5.000 ; D4.5 THRU; M4x10 ISO7380-1; NO washer
- 74.000/120.000/-152.000 ; [0/0/-1] ; D8.400 x 3.000 ; TOP CBORE D8.4 x3; head top Z-152.8 below box seat; floor2 mm
- 74.000/270.000/-157.000 ; [0/0/1] ; D4.500 x 5.000 ; D4.5 THRU; M4x10 ISO7380-1; NO washer
- 74.000/270.000/-152.000 ; [0/0/-1] ; D8.400 x 3.000 ; TOP CBORE D8.4 x3; head top Z-152.8 below box seat; floor2 mm
- 74.000/120.000/-157.000 ; [0/0/1] ; D4.500 x 5.000 ; D4.5 THRU; M4x10 ISO7380-1; NO washer
- 74.000/120.000/-152.000 ; [0/0/-1] ; D8.400 x 3.000 ; TOP CBORE D8.4 x3; head top Z-152.8 below box seat; floor2 mm
- 74.000/270.000/-157.000 ; [0/0/1] ; D4.500 x 5.000 ; D4.5 THRU; M4x10 ISO7380-1; NO washer
- 74.000/270.000/-152.000 ; [0/0/-1] ; D8.400 x 3.000 ; TOP CBORE D8.4 x3; head top Z-152.8 below box seat; floor2 mm
- 96.000/197.000/-157.000 ; [] ; profile slot ; 4x24 vertical strap slot R2 THRU
- 96.000/197.000/-157.000 ; [] ; profile slot ; 4x24 vertical strap slot R2 THRU
- 88.000/112.500/-157.000 ; [0/0/1] ; D3.300 x 5.000 ; M4x0.7-6H THRU; stop M4x20
- 88.000/112.500/-157.000 ; [0/0/1] ; D3.300 x 5.000 ; M4x0.7-6H THRU; stop M4x20
- 88.000/282.500/-157.000 ; [0/0/1] ; D3.300 x 5.000 ; M4x0.7-6H THRU; stop M4x20
- 88.000/282.500/-157.000 ; [0/0/1] ; D3.300 x 5.000 ; M4x0.7-6H THRU; stop M4x20

B06-203-STOP-BACK


TOP XY - fitted view (NTS)



FRONT XZ - fitted view (NTS)



SIDE YZ - fitted view (NTS)

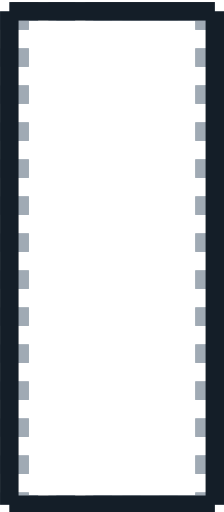

ENVELOPE / GLOBAL ASSEMBLY DATUM

X [-95.000, 95.000] Y [110.000, 115.000] Z [-152.000, -140.000]

Overall 190.000 x 5.000 x 12.000; material 6061-T651; exact STEP: B06-203-STOP-BACK.step

Assembly origin: X0 centreline; Y75 arm axis; Z0 tabletop. Ordinate features below use these datums.

Metal general linear +/-0.10; hole centres +/-0.10; cut silicone +/-0.50; threads as called out; deburr R0.5.

Mill/drill

Front stop removes before box slides toward +Y

FEATURES: entry X/Y/Z ; axis ; bore/depth ; machining callout

-88.000/112.500/-152.000 ; [0/0/1] ; D4.500 x 12.000 ; D4.5 THRU; M4x20

88.000/112.500/-152.000 ; [0/0/1] ; D4.500 x 12.000 ; D4.5 THRU; M4x20

B06-203-STOP-FRONT


TOP XY - fitted view (NTS)



FRONT XZ - fitted view (NTS)



SIDE YZ - fitted view (NTS)

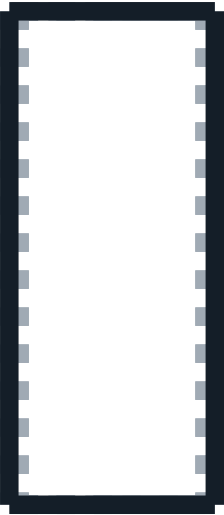

ENVELOPE / GLOBAL ASSEMBLY DATUM

X [-95.000, 95.000] Y [280.000, 285.000] Z [-152.000, -140.000]

Overall 190.000 x 5.000 x 12.000; material 6061-T651; exact STEP: B06-203-STOP-FRONT.step

Assembly origin: X0 centreline; Y75 arm axis; Z0 tabletop. Ordinate features below use these datums.

Metal general linear +/-0.10; hole centres +/-0.10; cut silicone +/-0.50; threads as called out; deburr R0.5.

Mill/drill

Front stop removes before box slides toward +Y


FEATURES: entry X/Y/Z ; axis ; bore/depth ; machining callout

-88.000/282.500/-152.000 ; [0/0/1] ; D4.500 x 12.000 ; D4.5 THRU; M4x20


88.000/282.500/-152.000 ; [0/0/1] ; D4.500 x 12.000 ; D4.5 THRU; M4x20

B06-309-COAX-BRACKET


TOP XY - fitted view (NTS)

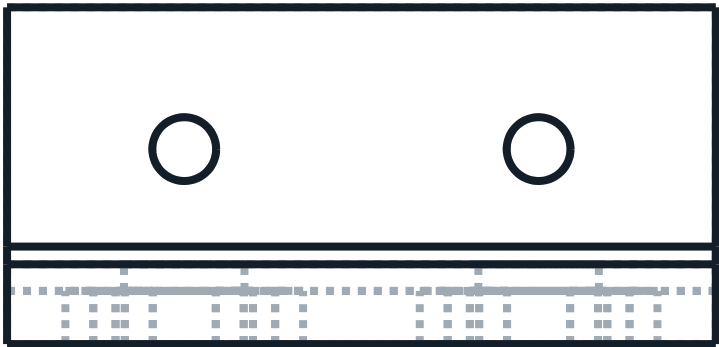

FRONT XZ - fitted view (NTS)

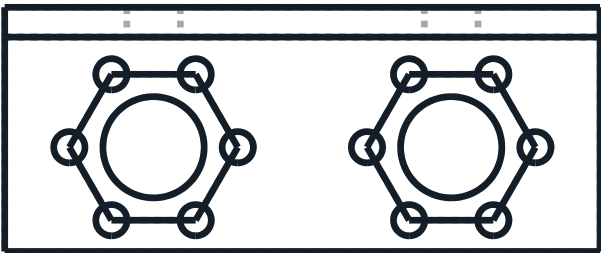

SIDE YZ - fitted view (NTS)

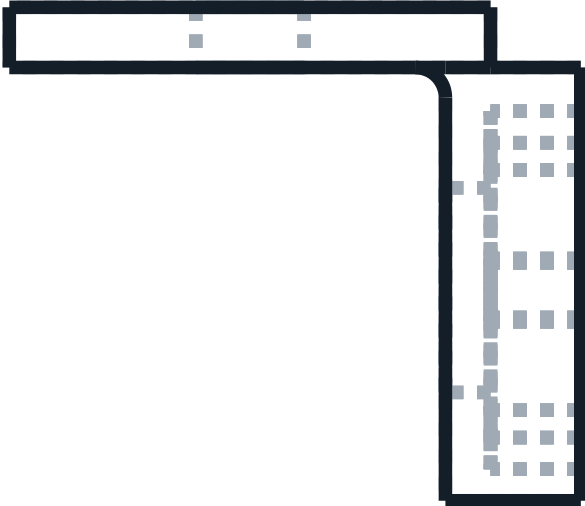

ENVELOPE / GLOBAL ASSEMBLY DATUM

X [-20.000, 20.000] Y [-19.000, 0.000] Z [25.600, 42.000]

Overall 40.000 x 19.000 x 16.400; material 6061-T651; exact STEP: B06-309-COAX-BRACKET.step

Assembly origin: X0 centreline; Y75 arm axis; Z0 tabletop. Ordinate features below use these datums.

Metal general linear +/-0.10; hole centres +/-0.10; cut silicone +/-0.50; threads as called out; deburr R0.5.

CNC mill original RF bulkhead bracket

Base2 mm at PCB top Z25.6; rear panel4.5 mm Y-19..-14.5; flange bearing face Y-16, internal fillet R1

H5/H6 mounting centres X±10,Y-8; coax axes X±10,Z35; mounts independent of cosmetic rear lid

Fixed coax rear datum retained at Y-16, separate from RJ45/power PCB shift; bond to chassis via J6 lug

FEATURES: entry X/Y/Z ; axis ; bore/depth ; machining callout

-10.000/-8.000/25.600 ; [0/0/1] ; D3.600 x 2.000 ; D3.6 THRU; M3x8 + washer0.5 + nut below PCB

-10.000/-19.000/35.000 ; [0/1/0] ; D6.800 x 4.500 ; D6.8 round THRU; external flange captured in hex pocket

-10.000/-19.000/35.000 ; [0/1/0] ; D9.800 x 3.000 ; AF9.8 rear HEX pocket depth3, six R1.05 corner reliefs; flange seat Y-16; source nominal AF9.5

10.000/-8.000/25.600 ; [0/0/1] ; D3.600 x 2.000 ; D3.6 THRU; M3x8 + washer0.5 + nut below PCB

10.000/-19.000/35.000 ; [0/1/0] ; D6.800 x 4.500 ; D6.8 round THRU; external flange captured in hex pocket

10.000/-19.000/35.000 ; [0/1/0] ; D9.800 x 3.000 ; AF9.8 rear HEX pocket depth3, six R1.05 corner reliefs; flange seat Y-16; source nominal AF9.5

AUROMIX / ODRADEK | B06-LOAD-03-WELD

W01 WELDMENT / PURCHASED HARDWARE / RELEASE GATES

W01 consists of B06-101 deck, B06-102 rear web, B06-103 lower jaw; STEP assembly gives nominal position.

Web top Z2 touches deck bottom Z2; web bottom Z-90 touches jaw top Z-90. NO overlapping plates.

Four continuous steel fillets z5 (nominal throat3.54), leg5.0..5.5, flat/concave profile within maximum modeled envelope.

Do not weld desk pad face, clamp threaded bores or shelf tapped holes. Front toe nominalY-46 / maximumY-45.5; tabletop rear datumY-45.

Nominal weld beads are separate CAD seam solids, not machined parts. Maximum5.5 envelope clearance checked; WPS remains pending.

Fixture assembly; weld sequence/stress relief agreed with fabricator; machine designated datums after weld.

Bought clamp screws: 2x Ganter DIN6332-M12-100-SK (AF6); feet: 2x DIN6311-25-S with snap ring.

Foot flat D25 face points UP to aluminium spreader. Supplier swivel bore/pin seat is envelope only; sample fit required.

Main flange/post bolts: 4x ISO4762 M8x16 top; 4x M8x20 bottom; thread engagements12.5/13.5 mm; nominal tip gap3 mm.

Shelf mounts: 4x M6x20 + washers; tray:4x M4x10 in D8.4x3 counterbores, no washer; stops:4x M4x20. Standard-hardware static audit passes; physical seats/tools still require samples.

No printed cosmetic part transmits motor load or clamp preload. Never replace steel threaded jaw with printed polymer.

Desk thickness budget15..60; controller box budget180x150x50,3kg; box removes toward desk interior (+Y).

Base flange follows interface-contract.json independently of any arm; T01 test plate8mm + washer1.6mm gives10.4mm engagement with M6x20.

Native IO PCB Gerber/IPC356 exists separately; passive board is not an EtherCAT master/ESC or GMSL decoder.

Remaining gates: full bolts/tools/weld clearance; material/load screening; LED PCB/power; cable bend/strain relief; slicing.

After coordinated files pass: unpowered prototype build and inspection, then restrained desk/thermal/electrical tests.

This document supports design review and fabricator DFM discussion. Do not order a complete base using this file alone.