

A18-IF09-101-contact-insert


IF09 | mm | J7.rotor local coordinates | supported, unpowered, unloaded

Nominal fit drawing. All CAD edges shown; hidden edges not distinguished. Not a production GD&T drawing.

YZ / tool face

XZ / side

XY / top

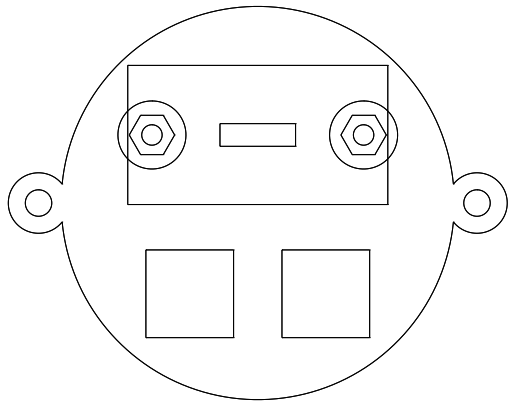

BREP extents 66.000 x 52.000; scale 1.000



BREP extents 6.000 x 52.000; scale 1.000



BREP extents 6.000 x 66.000; scale 1.000

Insert body: nominal D52, X103..106; local rear bosses extend to X100.

Original mounting: 2x D3.5 through at Y=-29/+29, Z=0; retain existing M3 hardware.

Camera windows: 2x11.6 square, centres (Y,Z)=(-9,-12)/(9,-12); HFM retention NOT released.

PCB pocket: 34.4 x18.4, Y=-17.2..17.2, Z=-0.2..18.2; floor X104.4, nominal depth1.6.

Arm PCB mounts: 2xD2.7 at Y=-14/+14, Z=9; rear nut pockets AF5.2, X100..102.2.

Rear wire slot: 10 x3 at Y=-5..5, Z=7.5..10.5; solder/cable retention pending.

Both parts need slicer support review. Protect pilots, PCB seats and screw holes; print fit coupons first.

Only plastic101/102 may be printed. PCB, pins and standard fasteners must not be printed.


No electrical release: no PCB routing, no pin travel qualification, no GMSL mating/EMI qualification.

A18-IF09-102-tool-distance-gauge

IF09 | mm | J7.rotor local coordinates | supported, unpowered, unloaded

Nominal fit drawing. All CAD edges shown; hidden edges not distinguished. Not a production GD&T drawing.

YZ / tool face

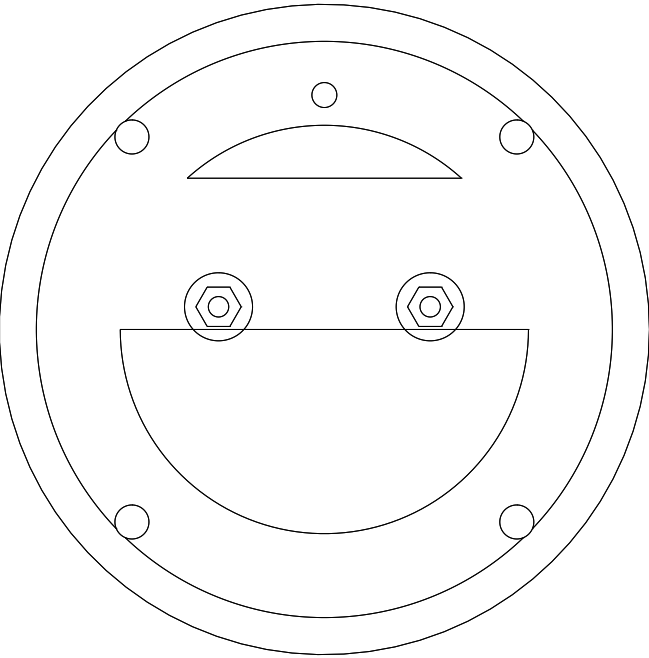

BREP extents 86.000 x 86.000; scale 1.000

XZ / side



BREP extents 4.600 x 86.000; scale 1.000

XY / top



BREP extents 4.600 x 86.000; scale 1.000

TEST FIXTURE ONLY: nominal OD86, X110..114.6; not the four-petal tool or a load-rated adaptor.

Recess: nominal female D76.2, X110..112.2; nominal diametral gap0.2 to arm D76 pilot.

Mechanical screw holes: 4xD4.5 through, PCD72, phase45deg; D3.3 key at Y=0,Z=31.

Tool PCB supports at X111.6; mounts2xD2.7 at Y=-14/+14,Z=3 (offset from arm Z9).

Rear nut pockets AF5.2, X112.4..114.6; same nominal M2.5x6 screws, tips exit rear.

Tool PCB pin mounting plane X110; arm pads X106; nominal working height4/free5.

Both parts need slicer support review. Protect pilots, PCB seats and screw holes; print fit coupons first.

Only plastic101/102 may be printed. PCB, pins and standard fasteners must not be printed.

No electrical release: no PCB routing, no pin travel qualification, no GMSL mating/EMI qualification.