
RV Kitchen Sink Faucet



Countertop Depth: Max 40mm (1-1/2")

Hole Size: 35mm (1-3/8")


With 10 inch Deck Plate

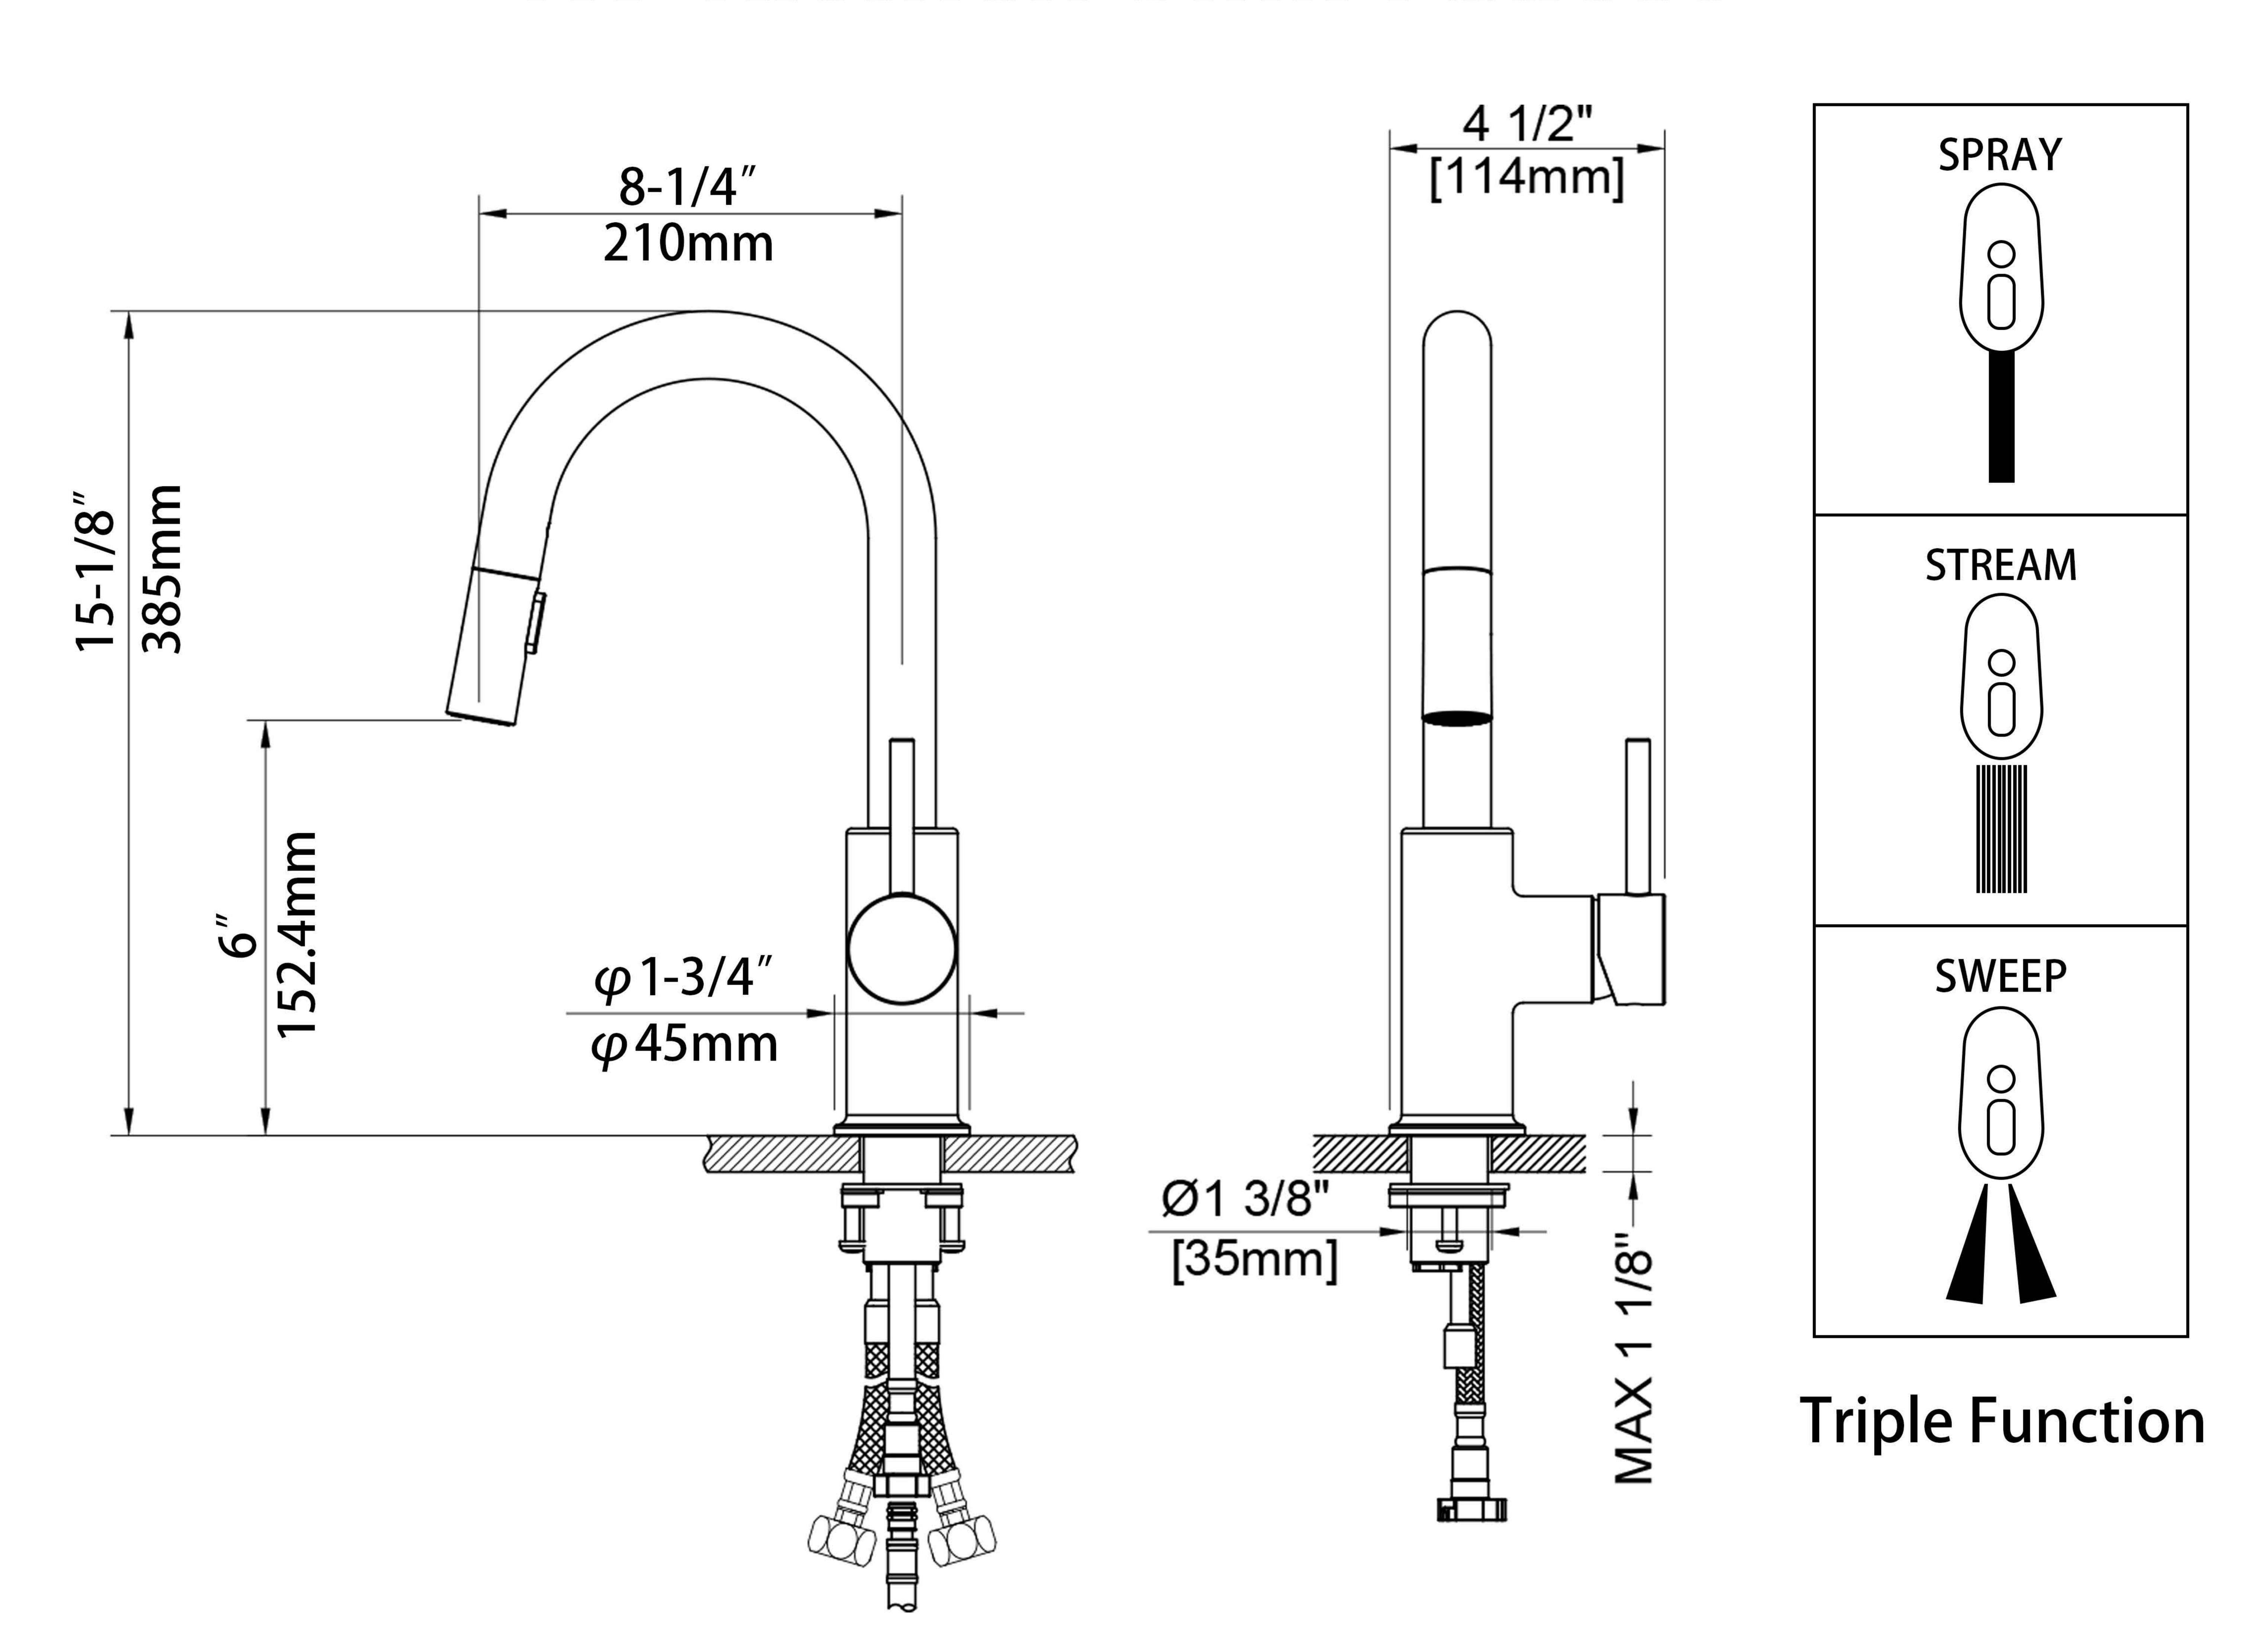



User's Manual




INSTALLATION STEPS

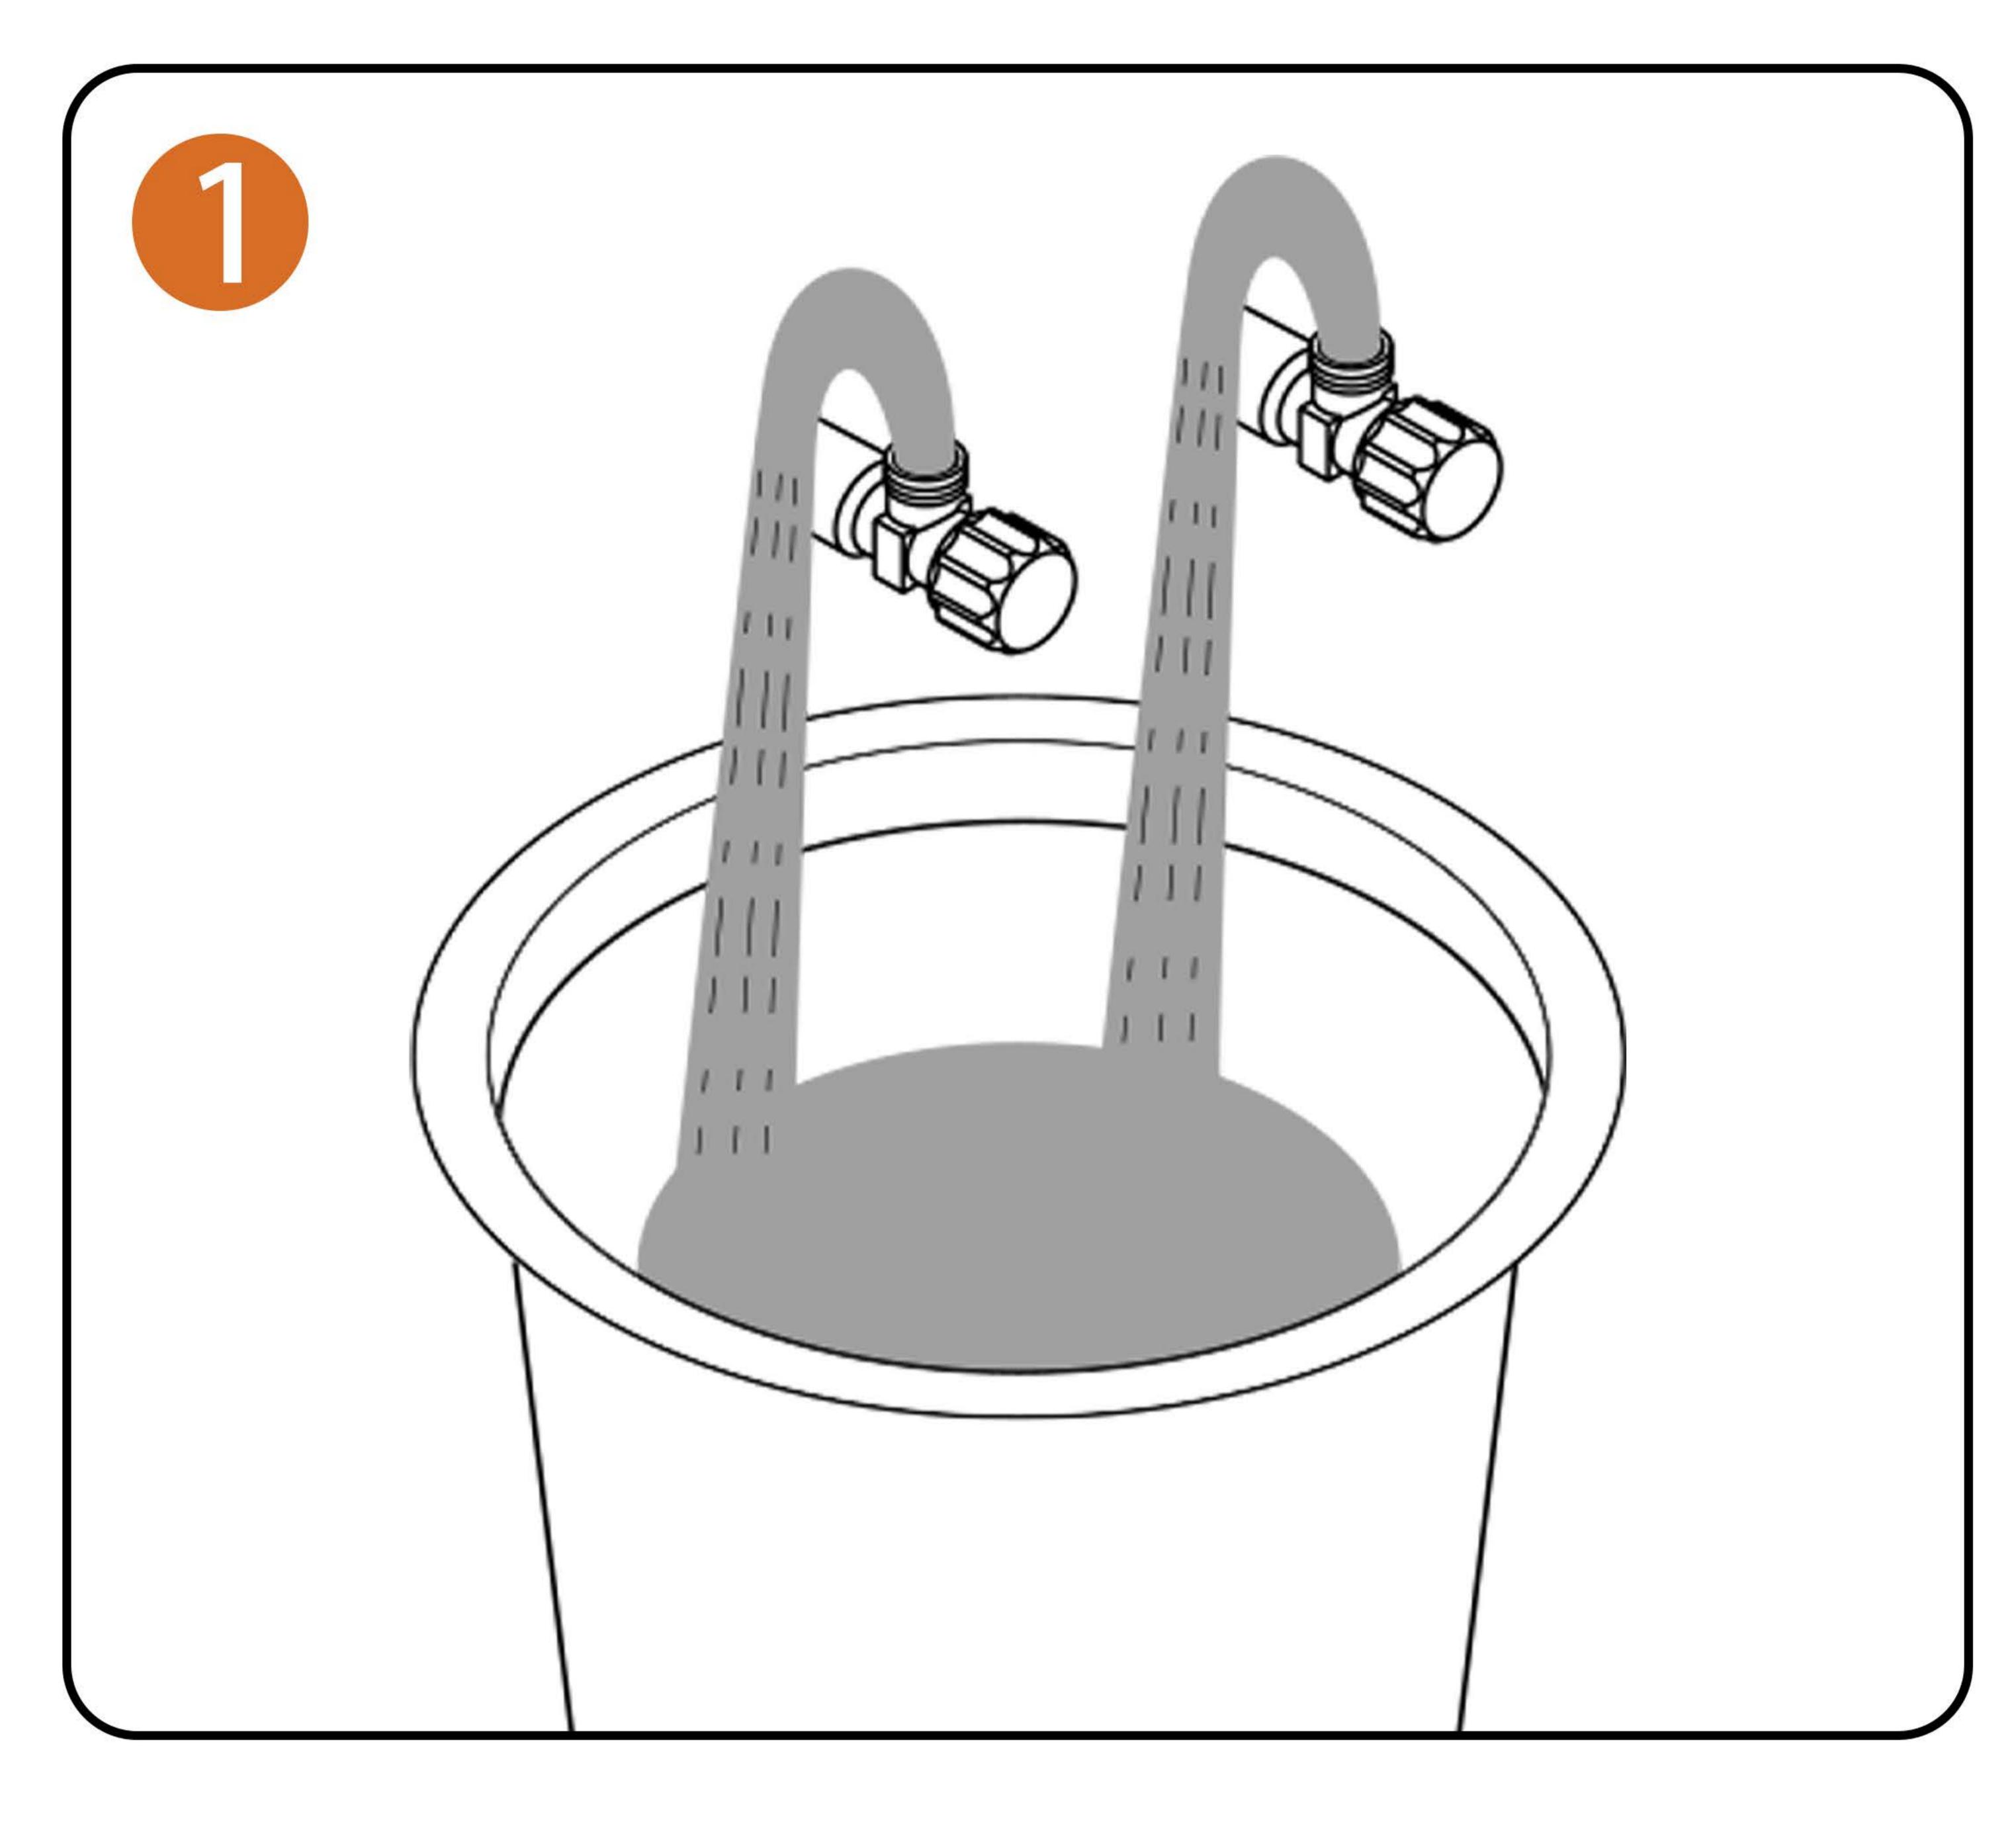

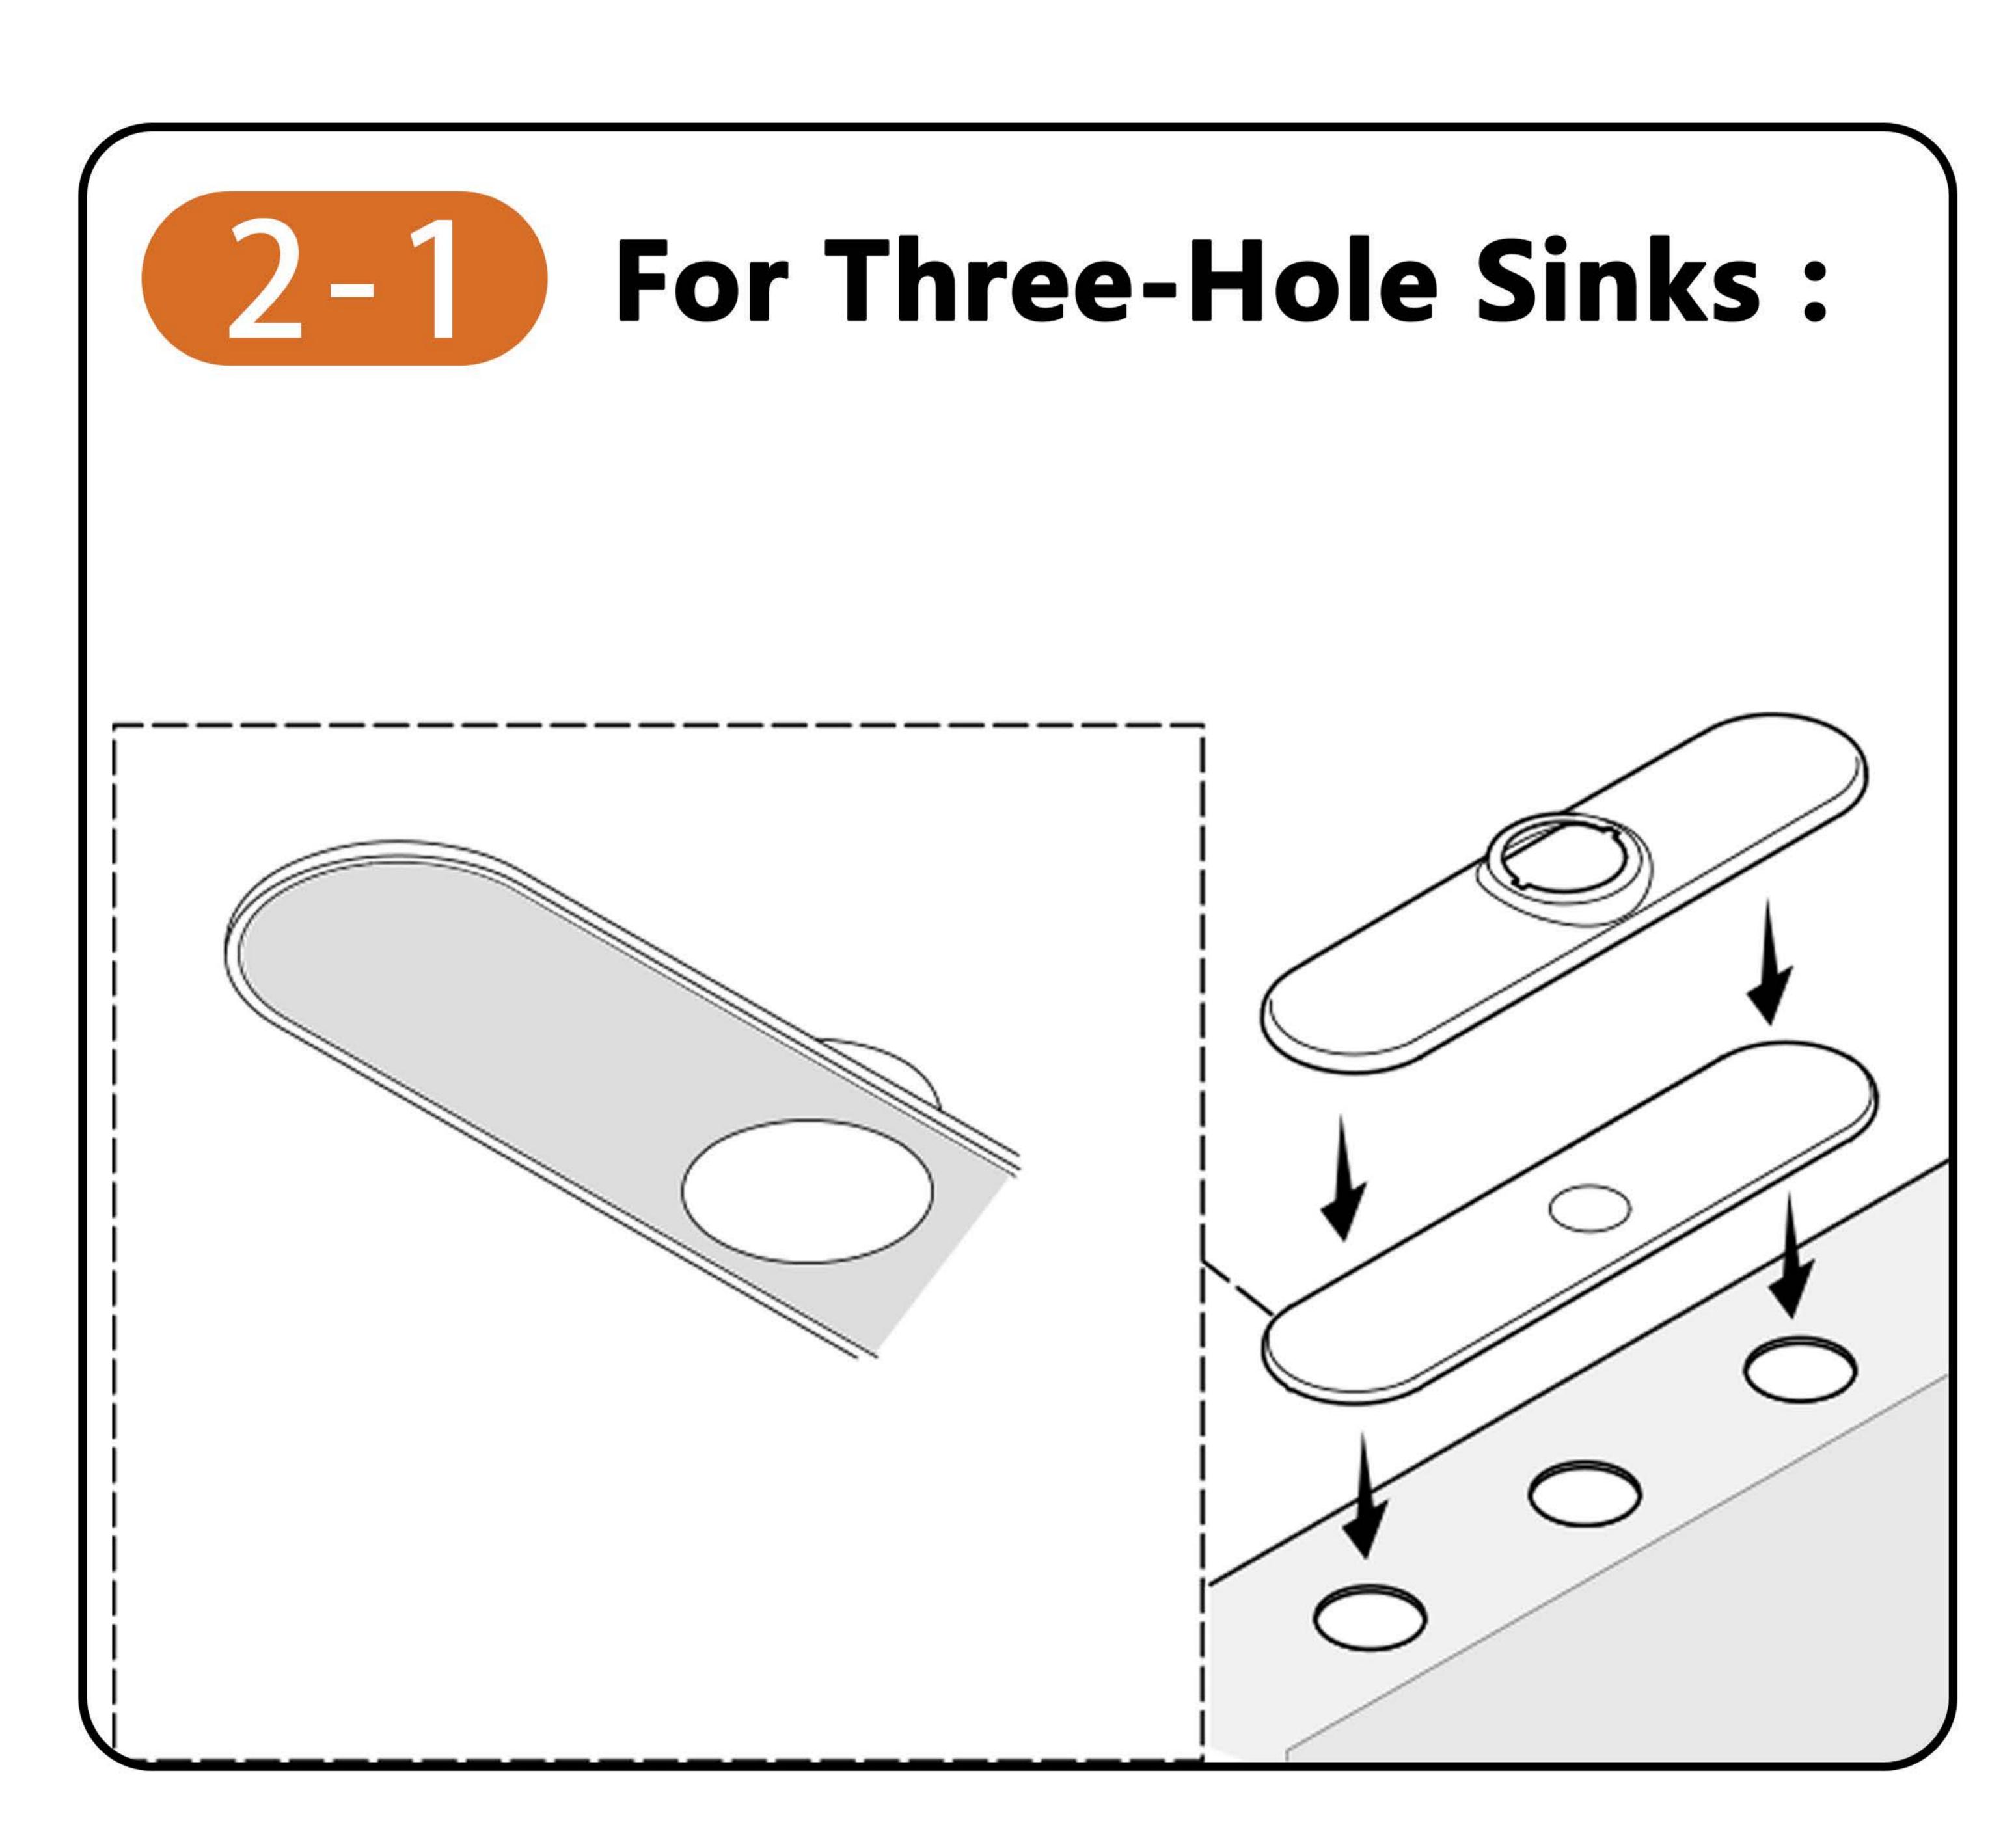

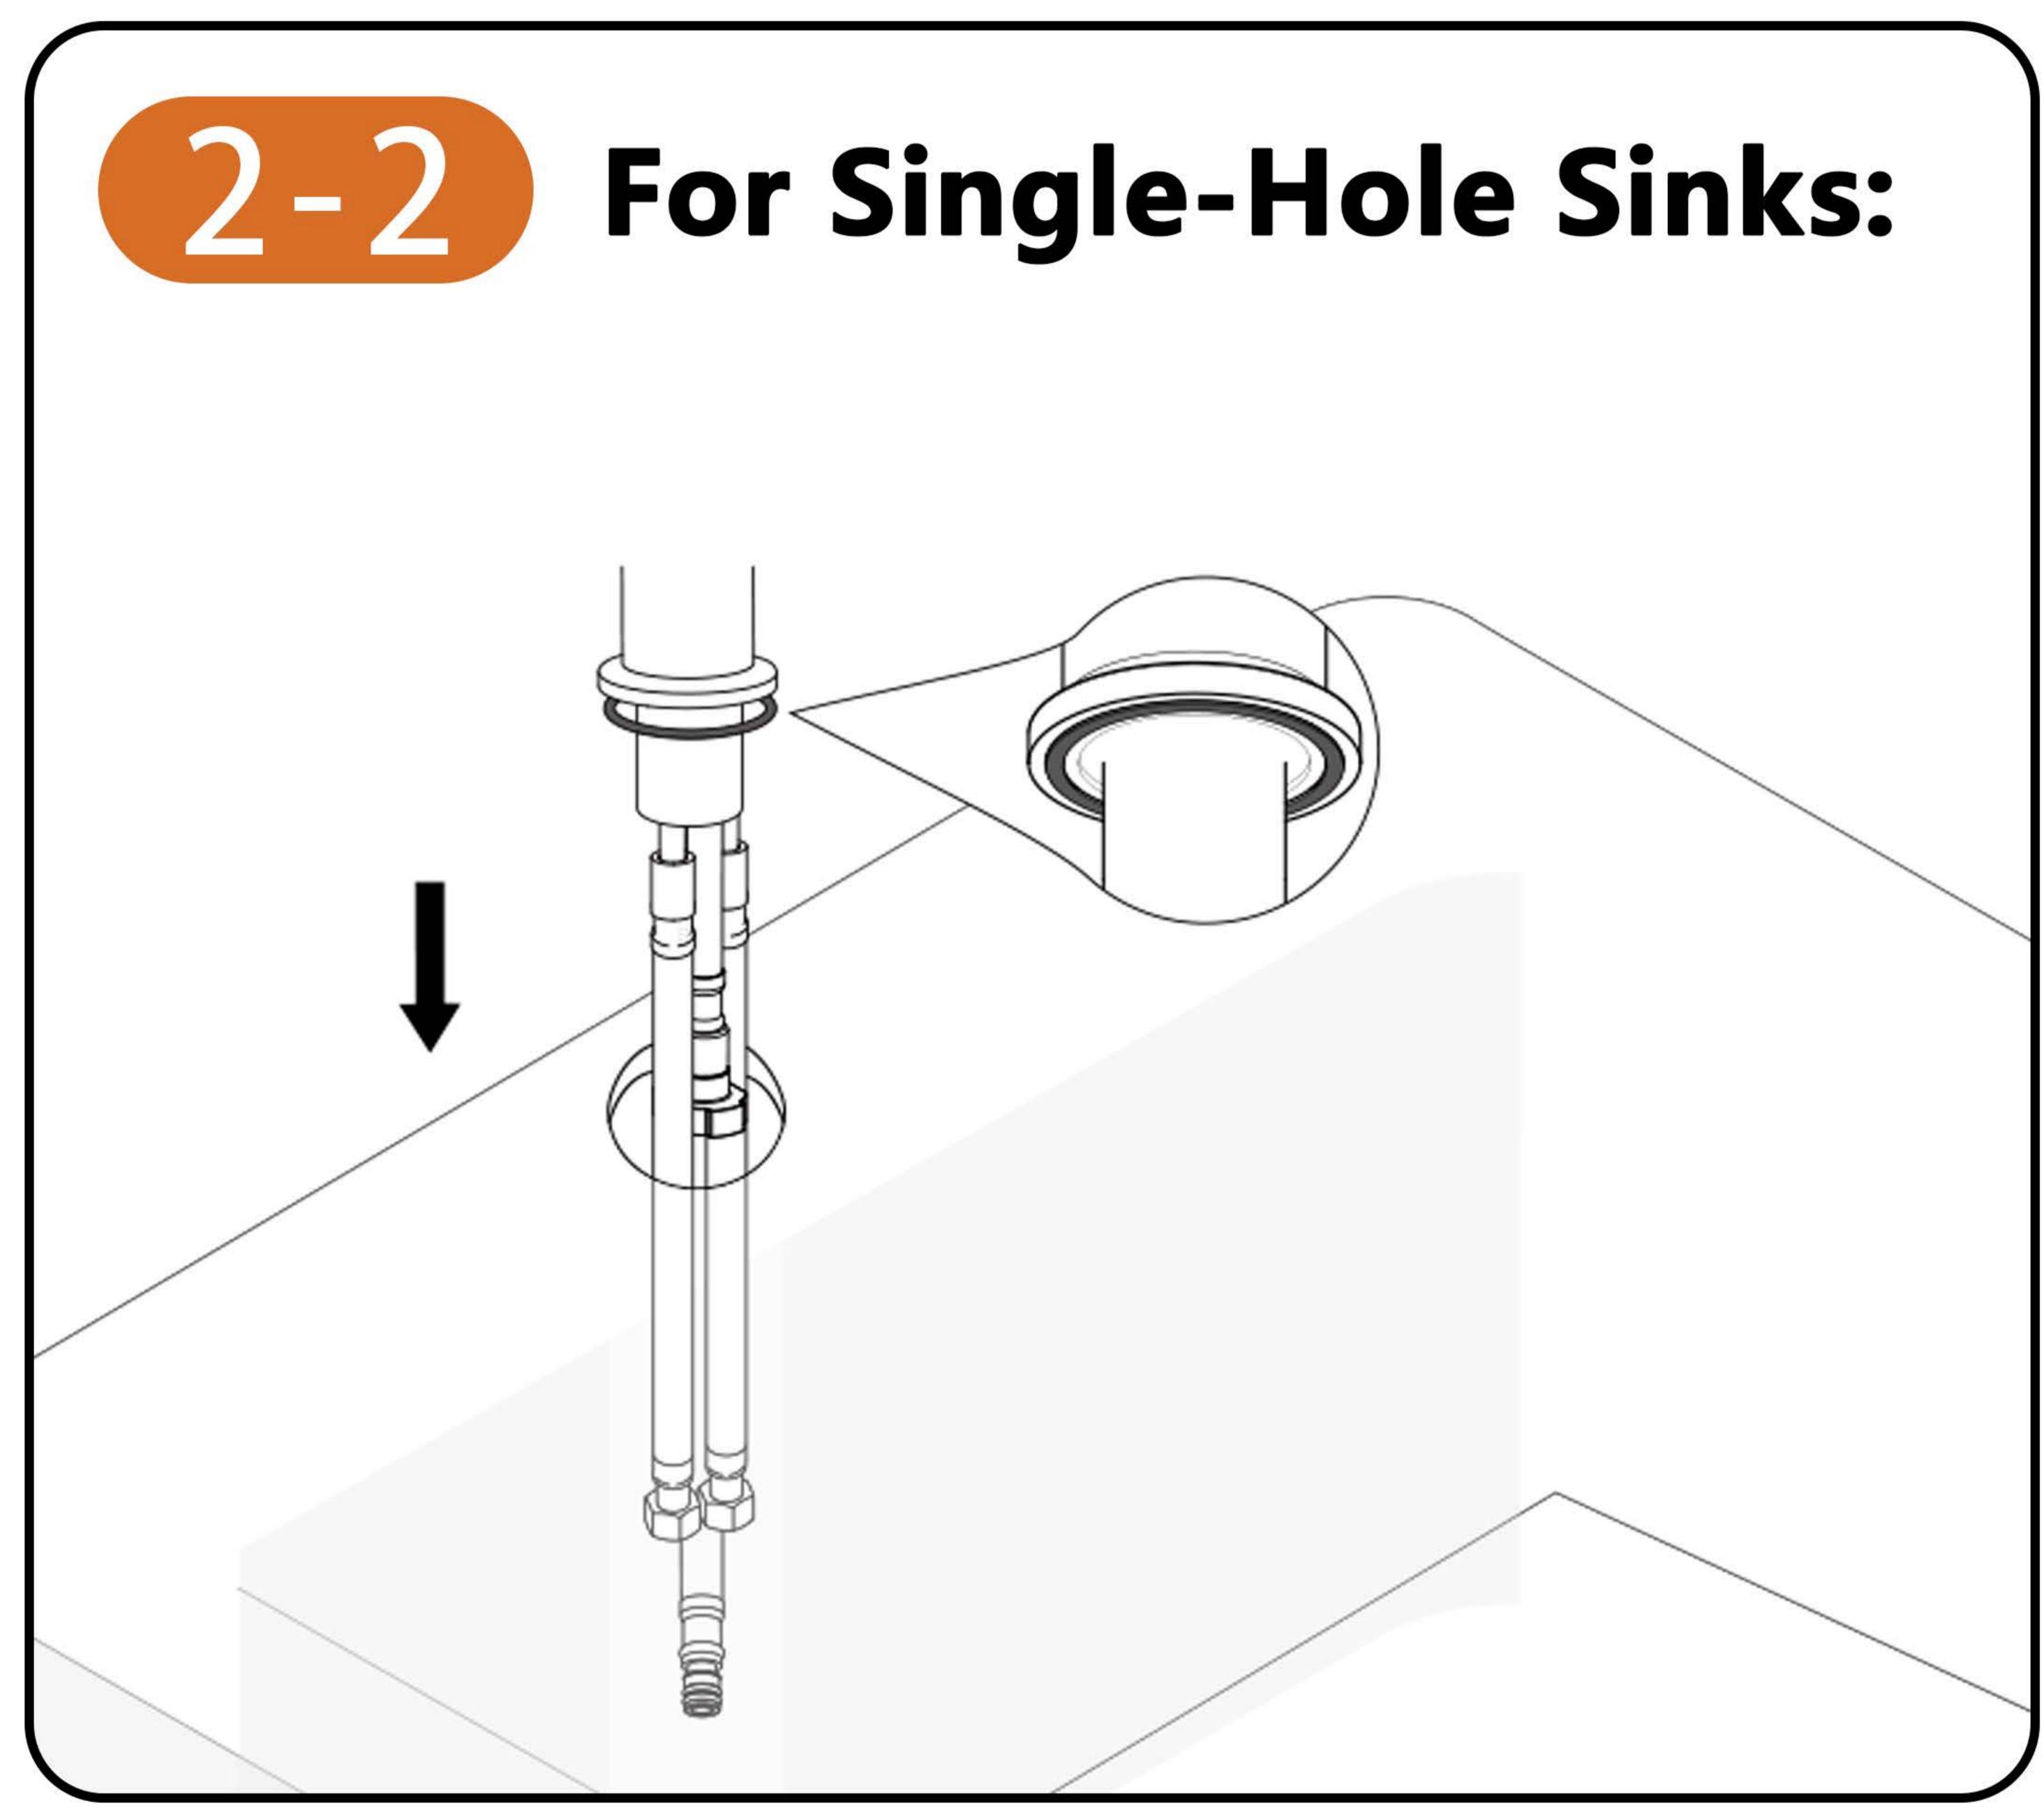

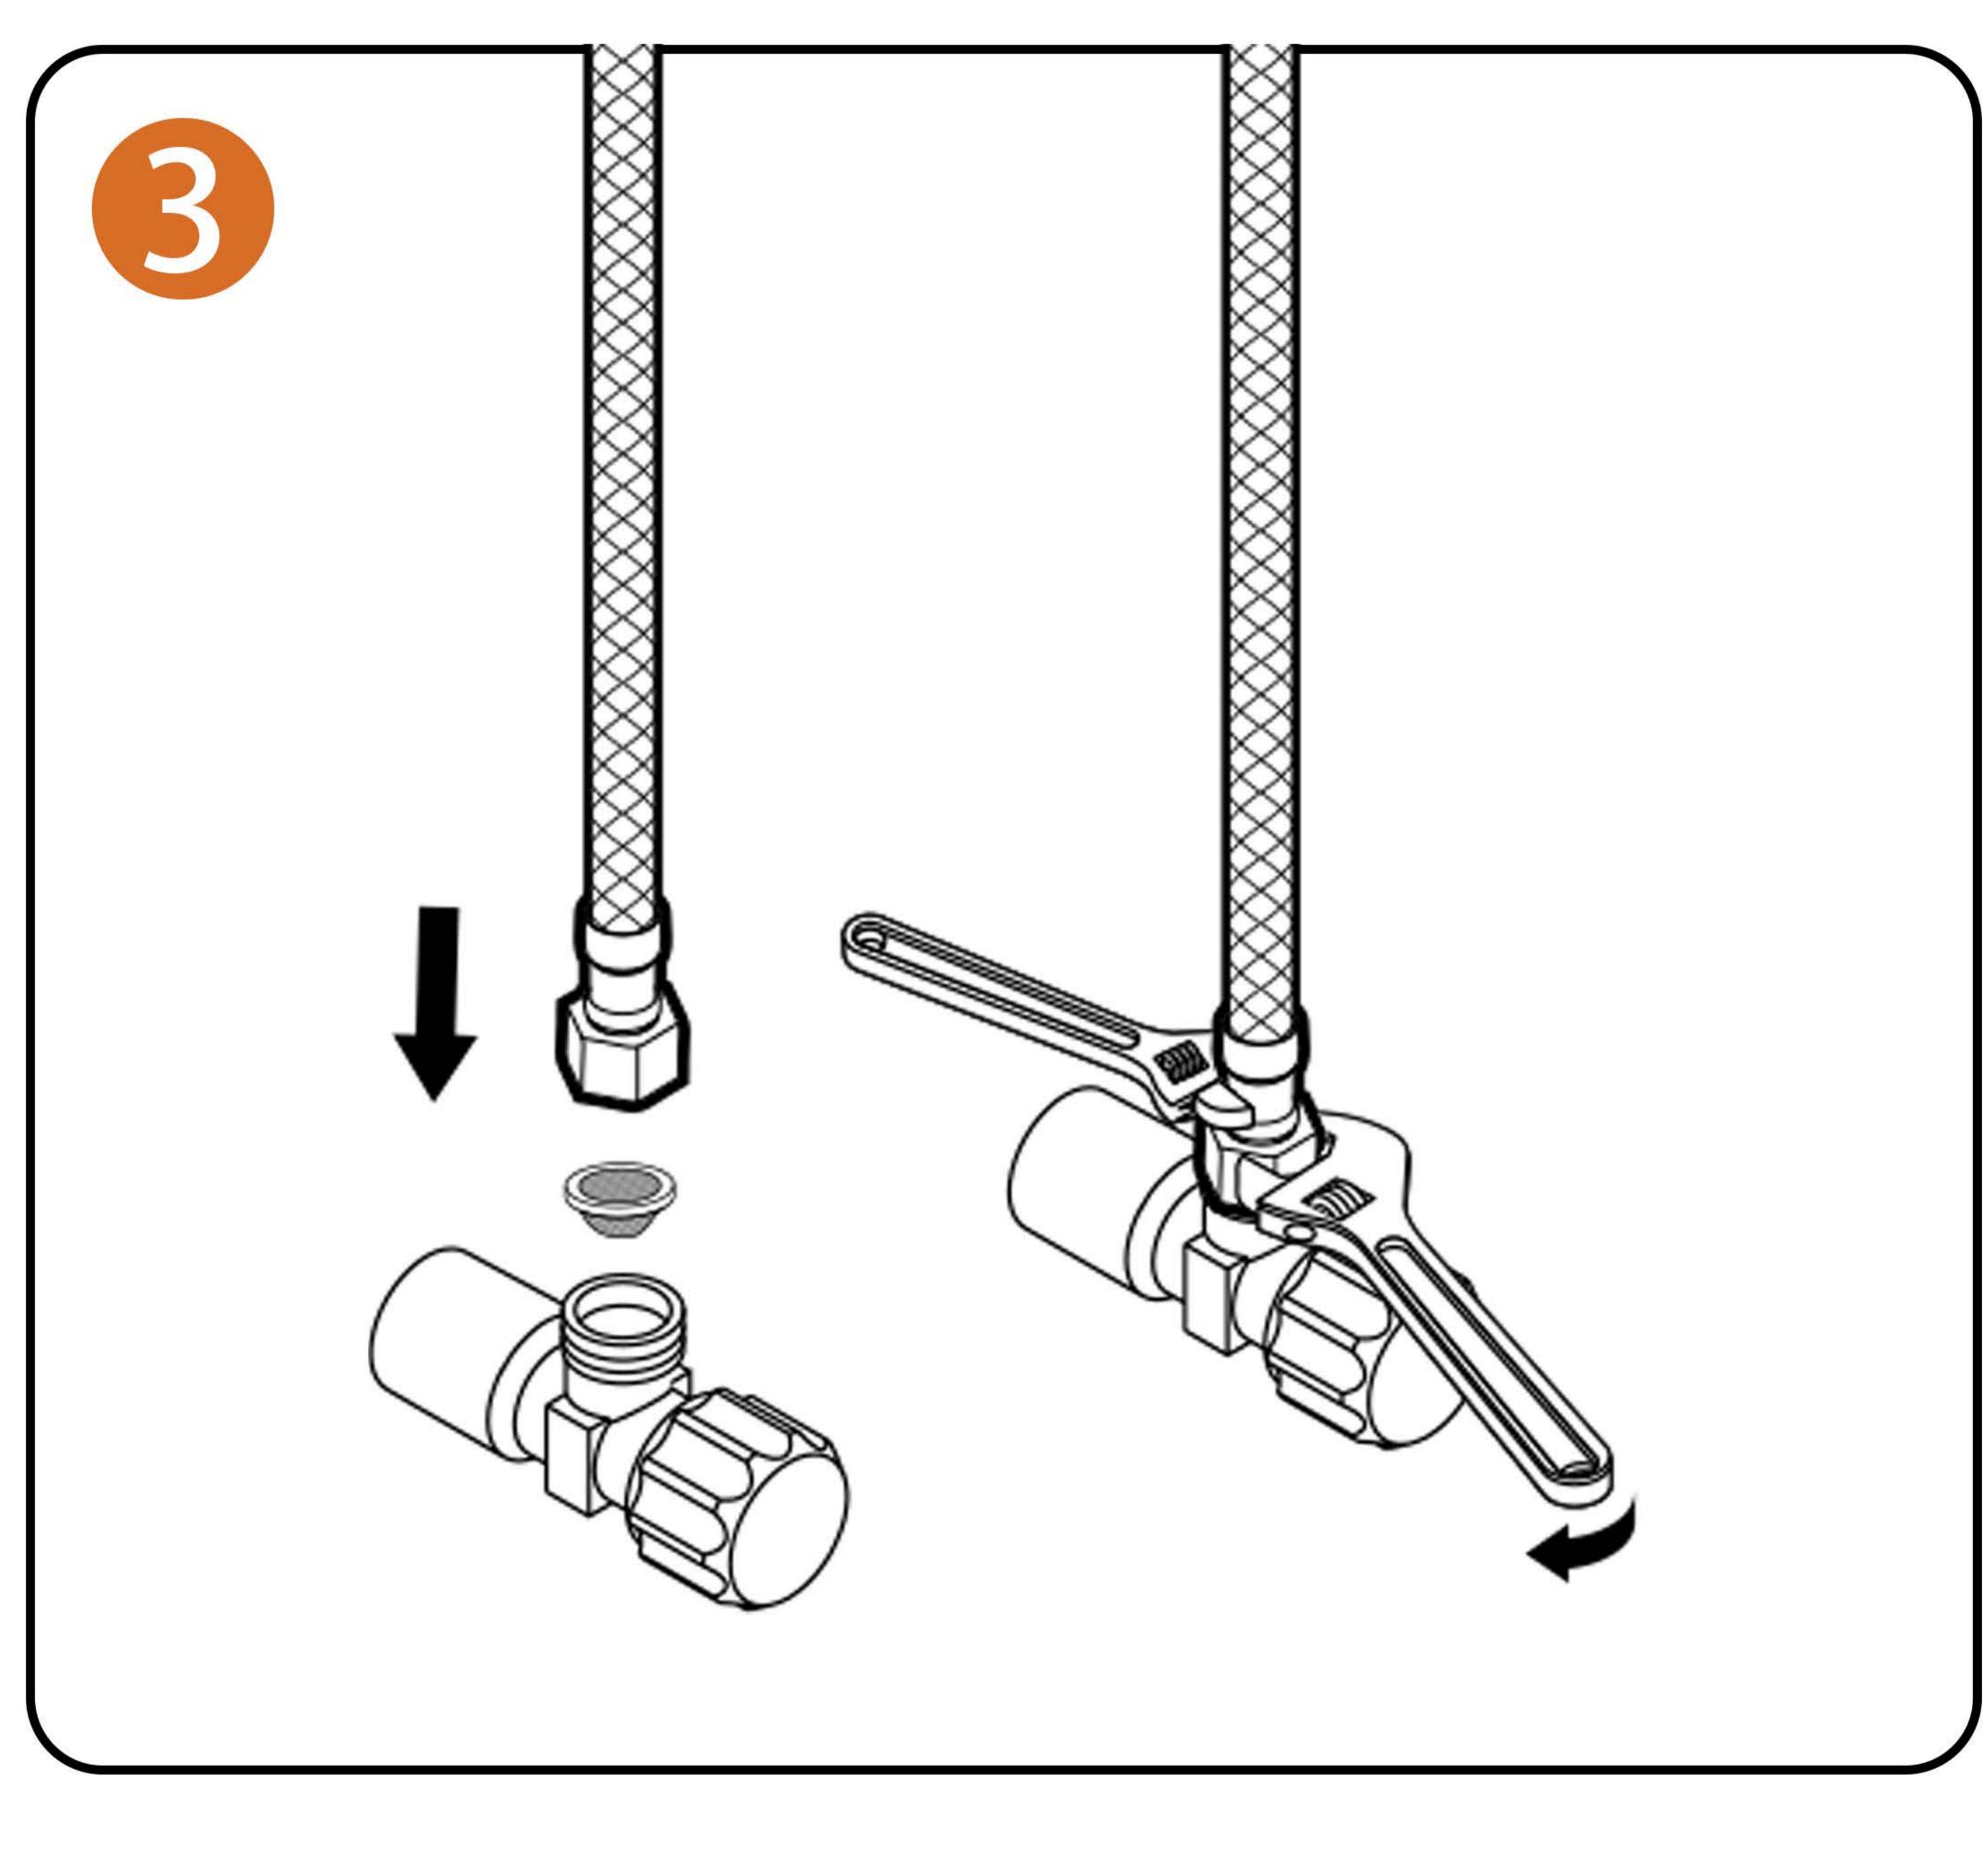







STEP

Shut off water suppliers Remove the old faucet, clean the mounting surface.

Note:For first time instal, flush the pipes first by open the angel valve to run 60s

STEP 2-1

For Three-Hole Sinks : Place stainless(non-staining) deck plate and deck plate gasket onto sink, secure it with silicone.

Note: the deck plate need purchase seprately

STEP 2-2

For Single-Hole Sinks : Put the rubber O-ring into the bottom gap of faucets then insert faucet into faucet hole.

STEP 3

Connect and tighten the supply hoses by using two adjustable wrenches (avoid twisting or kinking).

Note: Do not remove the net filter that attached into the connecting end!

SIEP 4

Shut off water suppliers. Push the handspray hose into the quick