


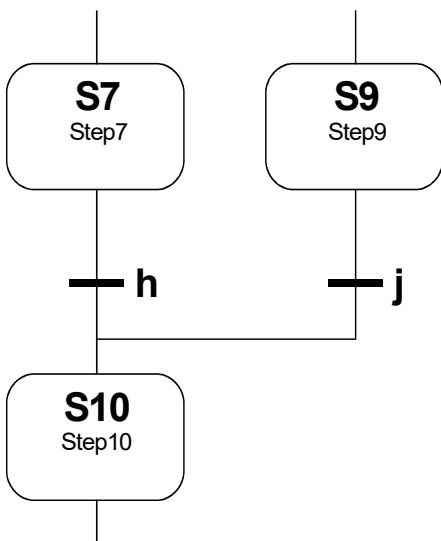


Joining with chain selection:

The end of a chain selection is displayed by as many transition symbols **above** the horizontal line, as selection paths to be finished exist.

Example:

A sequence from S7 to S10 may take place only, if S7 is active and the transition condition h is fulfilled or from S9 to S10 only if S9 is active and j is fulfilled.

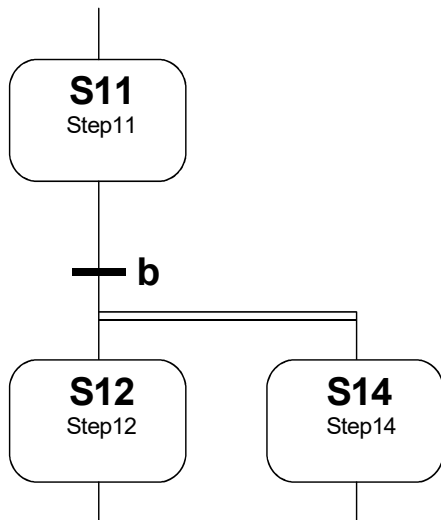

Branching of simultaneous chains:

Only one common transition symbol directly **above** the twin horizontal synchronization line is possible.

Example:

A sequence from S11 to S12,S14, .. may only take place if S11 is active and the transition condition b, which is belonging to the common transition, is fulfilled. After the synchronous activation of S12, S14, and so on the chains sequences are independent of one another.