


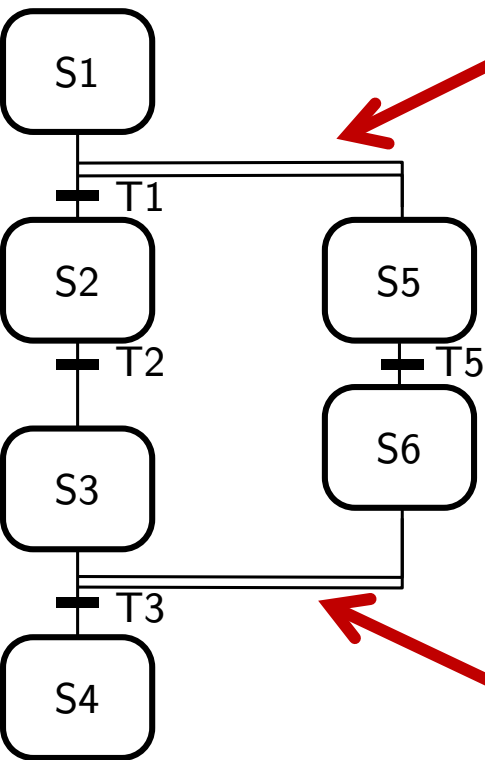

Beginning of simultaneous sequence

Only one common transition symbol directly above the twin horizontal synchronization line is possible.

Example:

A sequence from S1 to S2, S5, ... may only take place only if S1 is active and transition condition T1, which is belonging to the common transition, is fulfilled. After the synchronous activation of S2, S5 and so on the chains sequences are independent of one another.

End of simultaneous sequence

Only one common transition symbol directly under the twin horizontal Synchronisation line is possible.

Example:

A sequence from S3, S6, ... may only take place, if all steps being above and connected with the twin horizontal line are active and the transition condition T3, which belongs to the common transition, is fulfilled.