

ASSIGNMENT 4

Team ID	PNT2022TMID14295
Roll No	711319EC057
Date	27.10.2022

PROGRAM:

```
#include <WiFi.h>
#include <PubSubClient.h>
WiFiClient wifiClient;
String data3;
#define ORG "4yi0vc"
#define DEVICE_TYPE "nodeMcu"
#define DEVICE_ID "Assignment4"
#define TOKEN "123456789"
#define speed 0.034
#define led 14
char server[] = ORG ".messaging.internetofthings.ibmcloud.com";
char publishTopic[] = "iot-2/evt/Data/fmt/json";
char topic[] = "iot-2/cmd/home/fmt/String";
char authMethod[] = "use-token-auth";
char token[] = TOKEN;
char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID;
PubSubClient client(server, 1883, wifiClient);
void publishData();

const int trigpin=5;
const int echopin=18;
String command;
String data="";

long duration;
float dist;
```

```

void setup()
{
  Serial.begin(115200);
  pinMode(led, OUTPUT);
  pinMode(trigpin, OUTPUT);
  pinMode(echopin, INPUT);
  wifiConnect();
  mqttConnect();
}

void loop() {
  bool isNearby = dist < 100;
  digitalWrite(led, isNearby);

  publishData();
  delay(500);

  if (!client.loop()) {
    mqttConnect();
  }
}

void wifiConnect() {
  Serial.print("Connecting to "); Serial.print("Wifi");
  WiFi.begin("Wokwi-GUEST", "", 6);
  while (WiFi.status() != WL_CONNECTED) {
    delay(500);
    Serial.print(".");
  }
  Serial.print("WiFi connected, IP address: "); Serial.println(WiFi.localIP());
}

void mqttConnect() {
  if (!client.connected()) {
    Serial.print("Reconnecting MQTT client to "); Serial.println(server);
    while (!client.connect(clientId, authMethod, token)) {
      Serial.print(".");
      delay(500);
    }
    initManagedDevice();
    Serial.println();
  }
}

```

```

void initManagedDevice() {
    if (client.subscribe(topic)) {
        // Serial.println(client.subscribe(topic));
        Serial.println("IBM subscribe to cmd OK");
    } else {
        Serial.println("subscribe to cmd FAILED");
    }
}

void publishData()
{

    digitalWrite(trigpin,LOW);
    digitalWrite(trigpin,HIGH);
    delayMicroseconds(10);
    digitalWrite(trigpin,LOW);
    duration=pulseIn(echopin,HIGH);
    dist=duration*speed/2;
    if(dist<100){
        String payload = "{\"Normal Distance\":\"";
        payload += dist;
        payload += "}";

        Serial.print("\\n");
        Serial.print("Sending payload: ");
        Serial.println(payload);
        if (client.publish(publishTopic, (char*) payload.c_str())) {
            Serial.println("Publish OK");
        }

    }
    if(dist>101 && dist<111){
        String payload = "{\"Alert distance\":\"";
        payload += dist;
        payload += "}";

        Serial.print("\\n");
        Serial.print("Sending payload: ");
        Serial.println(payload);
        if(client.publish(publishTopic, (char*) payload.c_str())) {
            Serial.println("Warning crosses 110cm -- it automatically of the loop");
            digitalWrite(led,HIGH);
        }else {
            Serial.println("Publish FAILED");
        }
    }
}

```

```

    }


}
}

void callback(char* subscribeTopic, byte* payload, unsigned int
payloadLength){
    Serial.println("callback invoked for topic:");
    Serial.println(subscribeTopic);
    for(int i=0; i<payloadLength; i++){
        dist += (char)payload[i];
    }
    Serial.println("data:" + data3);
    if(data3=="lighton"){
        Serial.println(data3);

        digitalWrite(led,HIGH);
    }
    data3="";
}

```

WOKWI SCHEMATIC DIAGRAM:

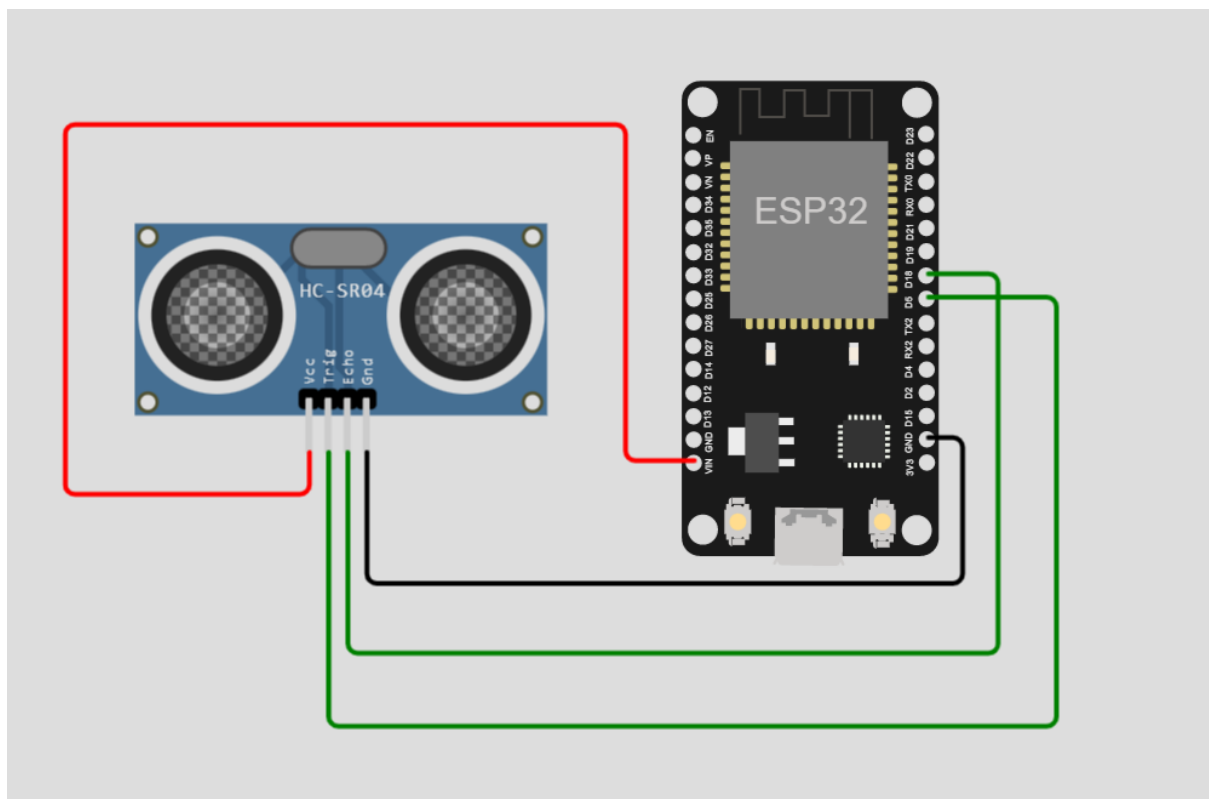

WOKWI OUTPUT:

```
Sending payload: {"Normal Distance":89.95}  
Publish OK
```

```
Sending payload: {"Normal Distance":89.95}  
Publish OK
```

```
Sending payload: {"Normal Distance":89.95}  
Publish OK
```

```
Sending payload: {"Normal Distance":89.98}  
Publish OK
```

```
Sending payload: {"Normal Distance":89.95}  
Publish OK
```

```
Sending payload: {"Normal Distance":89.95}  
Publish OK
```

WOKWI PROJECT LINK:

<https://wokwi.com/projects/347287380682605139>