

ASSIGNMENT – 4

TEAM ID	PNT2022TMID21693
PROJECT NAME	GAS LEAK MONITORING AND ALERTING SYSTEM
MAXIMUM MARKS	4

Question:

Write code and connections in wokwi for ultrasonic sensor. Whenever distance is less than 100 cms send "alert" to ibm cloud and display in device recent events.

CODE:

```
#include <WiFi.h>
#include <PubSubClient.h>

void callback(char* subscribetopic, byte* payload, unsigned int
payloadLength);

//-----credentials of IBM Accounts-----
#define ORG "jkwe7"//IBM ORGANITION ID
#define DEVICE_TYPE "ESP32"//Device type mentioned in ibm watson IOT Platform
#define DEVICE_ID "12345"//Device ID mentioned in ibm watson IOT Platform
#define TOKEN "12345678" //Token

String data3;

char server[] = ORG ".messaging.internetofthings.ibmcloud.com";
char publishTopic[] = "iot-2/evt/Data/fmt/json";
char subscribetopic[] = "iot-2/cmd/test/fmt/String";
char authMethod[] = "use-token-auth";
char token[] = TOKEN;

char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID;

WiFiClient wifiClient;

PubSubClient client(server, 1883, callback ,wifiClient);

const int trigPin = 5;
const int echoPin = 18;

#define SOUND_SPEED 0.034
```

```

long duration;
float distance;
void setup() {
  Serial.begin(115200);
  pinMode(trigPin, OUTPUT);
  pinMode(echoPin, INPUT);
  wificonnect();
  mqttconnect();
}
void loop()
{
  digitalWrite(trigPin, LOW);
  delayMicroseconds(2);
  digitalWrite(trigPin, HIGH);
  delayMicroseconds(10);
  digitalWrite(trigPin, LOW);
  duration = pulseIn(echoPin, HIGH);
  distance = duration * SOUND_SPEED/2;
  Serial.print("Distance (cm): ");
  Serial.println(distance);
  if(distance<100)
  {
    Serial.println("ALERT!!");
    delay(1000);
    PublishData(distance);
    delay(1000);
    if (!client.loop()) {
      mqttconnect();
    }
  }
  delay(1000);
}
void PublishData(float dist) {

```

```

mqttconnect();
String payload = "{\\"Distance\\":\"";
payload += dist;
payload += "\",\\"ALERT!!\\":\"\"\\\"Distance less than 100cms\\\"\"";
payload += "}";
Serial.print("Sending payload: ");
Serial.println(payload);

if (client.publish(publishTopic, (char*) payload.c_str())) {
    Serial.println("Publish ok");
} else {
    Serial.println("Publish failed");
}
}


void mqttconnect() {
    if (!client.connected()) {
        Serial.print("Reconnecting client to ");
        Serial.println(server);
        while (!client.connect(clientId, authMethod, token)) {
            Serial.print(".");
            delay(500);
        }
        initManagedDevice();
        Serial.println();
    }
}

void wificonnect()
{
    Serial.println();
    Serial.print("Connecting to ");
    WiFi.begin("Wokwi-GUEST", "", 6);
    while (WiFi.status() != WL_CONNECTED) {
        delay(500);
    }
}

```

```
Serial.print(".");
}
Serial.println("");
Serial.println("WiFi connected");
Serial.println("IP address: ");
Serial.println(WiFi.localIP());
}
void initManagedDevice() {
if (client.subscribe(subscribetopic)) {
Serial.println((subscribetopic));
Serial.println("subscribe to cmd OK");
} else {
Serial.println("subscribe to cmd FAILED");
}
}
void callback(char* subscribetopic, byte* payload, unsigned int payloadLength)
{
Serial.print("callback invoked for topic: ");
Serial.println(subscribetopic);
for (int i = 0; i < payloadLength; i++) {
//Serial.print((char)payload[i]);
data3 += (char)payload[i];
}
Serial.println("data: "+ data3);
data3="";
}
```

CIRCUIT DIAGRAM:

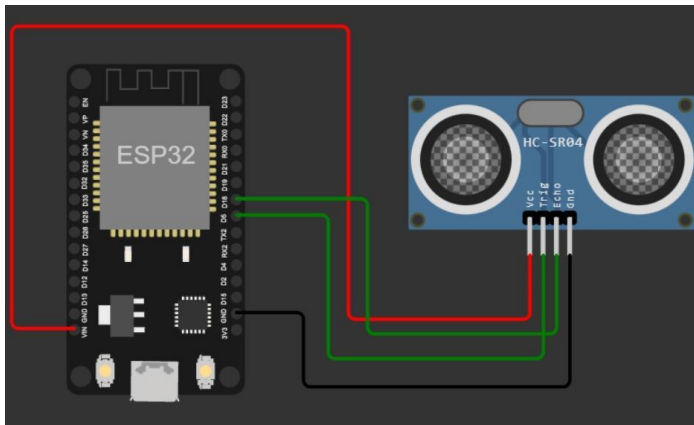

IBM CLOUD OUTPUT:

IBM Cloud IoT Platform interface showing device data.

Navigation: Browse | Action | Device Types | Interfaces | Add Device (+)

Tab: Identity | Device Information | **Recent Events** | State | Logs

The recent events listed show the live stream of data that is coming and going from this device.

Event	Value	Format	Last Received
event_1	{"distance":7,"Alert":"Distance less than 10"}	json	a few seconds ago
event_1	{"distance":9,"Alert":"Distance less than 10"}	json	a few seconds ago
event_1	{"distance":8,"Alert":"Distance less than 10"}	json	a few seconds ago
event_1	{"distance":9,"Alert":"Distance less than 10"}	json	a few seconds ago