

# ASSIGNMENT 4

Assignment Date	19 October 2022
Student Name	Vetri Vikram I
Student Roll Number	727819TUIT147
Maximum Marks	2 Marks

## Question :

Write a code and connections in wokwi for the ultrasonic sensor. Whenever the distance is less than 100cms send an "Alert" to IBM cloud and display in the device recent events.

## Code:

```
#include <WiFi.h>
#include <PubSubClient.h>
void callback(char* subscribetopic, byte* payload, unsigned int
payloadLength);
//-----credentials of IBM Accounts-----
#define ORG "kotoq5"//IBM ORGANITION ID
#define DEVICE_TYPE "ESP32"//Device type mentioned in ibm watson IOT Platform
#define DEVICE_ID "12345"//Device ID mentioned in ibm watson IOT Platform
#define TOKEN "12345678" //Token
String data3;
char server[] = ORG ".messaging.internetofthings.ibmcloud.com";
char publishTopic[] = "iot-2/evt/Data/fmt/json";
char subscribetopic[] = "iot-2/cmd/test/fmt/String";
char authMethod[] = "use-token-auth";
```

```

char token[] = TOKEN;
char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID;
WiFiClient wifiClient;
PubSubClient client(server, 1883, callback ,wifiClient);
const int trigPin = 5;
const int echoPin = 18;
#define SOUND_SPEED 0.034
long duration;
float distance;
void setup() {
  Serial.begin(115200);
  pinMode(trigPin, OUTPUT);
  pinMode(echoPin, INPUT);
  wifiConnect();
  mqttConnect();
}
void loop()
{
  digitalWrite(trigPin, LOW);
  delayMicroseconds(2);
  digitalWrite(trigPin, HIGH);
  delayMicroseconds(10);
  digitalWrite(trigPin, LOW);
  duration = pulseIn(echoPin, HIGH);
  distance = duration * SOUND_SPEED/2;
  Serial.print("Distance (cm): ");
  Serial.println(distance);
  if(distance<100)
  {
    Serial.println("ALERT!!");
    delay(1000);
  }
}

```

```

PublishData(distance);
delay(1000);
if (!client.loop()) {
  mqttconnect();
}
}
delay(1000);
}
void PublishData(float dist) {
  mqttconnect();
  String payload = "{\"Distance\":\"";
  payload += dist;
  payload += "\",\"ALERT!!\":\"\"Distance less than 100cms\"\"";
  payload += "}";
  Serial.print("Sending payload: ");
  Serial.println(payload);

  if (client.publish(publishTopic, (char*) payload.c_str())) {
    Serial.println("Publish ok");
  } else {
    Serial.println("Publish failed");
  }
}
void mqttconnect() {
  if (!client.connected()) {
    Serial.print("Reconnecting client to ");
    Serial.println(server);
    while (!client.connect(clientId, authMethod, token)) {
      Serial.print(".");
      delay(500);
    }
  }
}

```

```

initManagedDevice();
Serial.println();
}
}
void wificonnect()
{
Serial.println(); Serial.print("Connecting to ");
WiFi.begin("Wokwi-GUEST", "", 6); while (WiFi.status() !=
WL_CONNECTED) { delay(500);
Serial.print(".");
}
Serial.println(""); Serial.println("WiFi
connected"); Serial.println("IP address: ");
Serial.println(WiFi.localIP());
}
void initManagedDevice() {
if (client.subscribe(subscribetopic)) {
Serial.println((subscribetopic)); Serial.println("subscribe to
cmd OK");
} else {
Serial.println("subscribe to cmd FAILED");
}
}
void callback(char* subscribetopic, byte* payload, unsigned int payloadLength)
{
Serial.print("callback invoked for topic: ");
Serial.println(subscribetopic);
for (int i = 0; i < payloadLength; i++) {

```

```

//Serial.print((char)payload[i]);
data3 += (char)payload[i];
}
Serial.println("data: "+ data3);
data3="";
}

```

Diagram.json:

```

{
  "version": 1,
  "author": "sweetysharon",
  "editor": "wokwi",
  "parts": [
    { "type": "wokwi-esp32-devkit-v1", "id": "esp", "top": -4.67, "left": -114.67, "attrs": {} },
    { "type": "wokwi-hc-sr04", "id": "ultrasonic1", "top": 15.96, "left": 89.17, "attrs": {} }
  ],
  "connections": [
    [ "esp:TX0", "$serialMonitor:RX", "", [] ],
    [ "esp:RX0", "$serialMonitor:TX", "", [] ],
    [
      "esp:VIN",
      "ultrasonic1:VCC",
      "red",
      [ "h-37.16", "v-178.79", "h200", "v173.33", "h100.67" ]
    ],
    [ "esp:GND.1", "ultrasonic1:GND", "black", [ "h39.87", "v44.04", "h170" ] ],
    [ "esp:D5", "ultrasonic1:TRIG", "green", [ "h54.54", "v85.07", "h130.67" ] ],
    [ "esp:D18", "ultrasonic1:ECHO", "green", [ "h77.87", "v80.01", "h110" ] ]
  ]
}


```

```
]
}
```

Wokwi simulation link:

<https://wokwi.com/projects/346508314441417298>

Circuit Diagram:

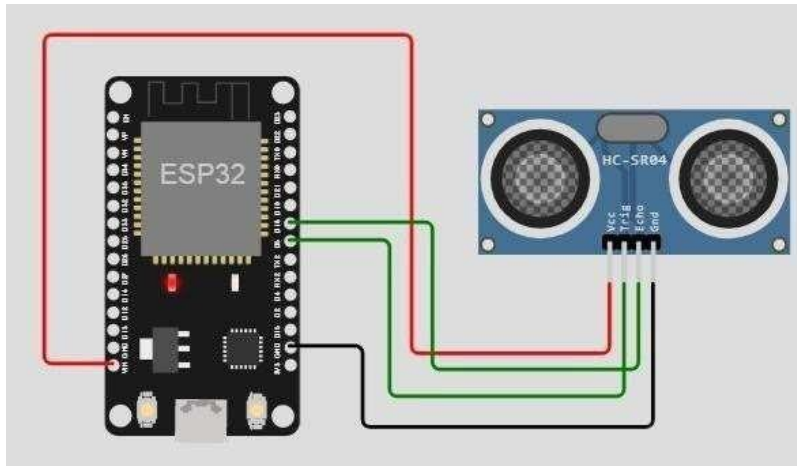

Output:

Wokwi output:

```
Connecting to ....
Wifi connected
IP address:
10.10.0.2
Reconnecting client to ytluse.messaging.internetofthings.ibmcloud.com
iot-2/cmd/test/fmt/5string
subscribe to cmd OK

Distance (cm): 399.92
Distance (cm): 399.96
Distance (cm): 399.94
Distance (cm): 399.98
Distance (cm): 399.94
Distance (cm): 399.92
Distance (cm): 399.94
```

## IBM cloud output:



The screenshot shows the IBM Cloud IoT Platform console. On the left is a dark sidebar with icons for navigation. The top navigation bar includes 'Browse', 'Action', 'Device Types', and 'Interfaces'. A blue 'Add Device' button is in the top right. The main content area has tabs for 'Identity', 'Device Information', 'Recent Events', 'State', and 'Logs'. The 'Recent Events' tab is active, displaying a message: 'The recent events listed show the live stream of data that is coming and going from this device.' Below this is a table with four columns: 'Event', 'Value', 'Format', and 'Last Received'. The table contains four rows of data, all with 'event\_1' as the event name and 'json' as the format. The 'Value' column contains JSON objects with 'distance' and 'Alert' fields. The 'Last Received' column shows 'a few seconds ago' for each entry.

Event	Value	Format	Last Received
event_1	{"distance":7,"Alert":"","Distance less than 10"}	json	a few seconds ago
event_1	{"distance":9,"Alert":"","Distance less than 10"}	json	a few seconds ago
event_1	{"distance":8,"Alert":"","Distance less than 10"}	json	a few seconds ago
event_1	{"distance":9,"Alert":"","Distance less than 10"}	json	a few seconds ago