

ASSIGNMENT 4

Date	04 November 2022
Team ID	PNT2022TMID38093
Project Name	Project -Hazardous Area Monitoring for industrial plant powered by IOT
Maximum Marks	4 Marks

Project Title: Hazardous Area Monitoring for industrial plant powered by IOT

Team ID:PNT2022TMID38093

QUESTION:

Write code and connections in wokwi for ultrasonic sensor. Whenever distance is less than 100 cms send "alert" to ibm cloud and display in device recent events.

CODE:

```
#include <WiFi.h>
#include
<PubSubClient.h>
void callback(char* subscribetopic, byte* payload,
unsigned int payloadLength);
//-----credentials of IBM Accounts-----
#define ORG "Ashfaq1824"//IBM ORGANITION ID
#define DEVICE_TYPE "ESP32"//Device type mentioned in ibm watson IOT
Platform #define DEVICE_ID "12345"//Device ID mentioned in ibm watson IOT
Platform #define TOKEN "12345678" //Token
String data3;
char server[] = ORG
".messaging.internetofthings.ibmcloud.com"; char
publishTopic[] = "iot-2/evt/Data/fmt/json";
char subscribetopic[] = "iot-
2/cmd/test/fmt/String"; char authMethod[]
= "use-token-auth";
char token[] = TOKEN;
char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID;
WiFiClient wifiClient;
PubSubClient client(server, 1883, callback
,wifiClient); const int trigPin = 5;
const int echoPin = 18;
#define
SOUND_SPEED 0.034
long duration;
float
```

```

distanc
e; void
setup()
{

Serial.begin(115200);
pinMode(trigPin,
OUTPUT);
pinMode(echoPin,
INPUT);
wificonnect();
mqttconnect();
}
void loop()
{
digitalWrite(trigPin, LOW);
delayMicroseconds(2);
digitalWrite(trigPin, HIGH);
delayMicroseconds(10);
digitalWrite(trigPin, LOW);
duration = pulseIn(echoPin,
HIGH);
distance = duration *
SOUND_SPEED/2;
Serial.print("Distance (cm): ");
Serial.println(distance);
if(distance<100)
{
Serial.println("ALE
RT!!");
delay(1000);
PublishData(distanc
e); delay(1000);
if (!client.loop())
{ mqttconnect();
}
}
delay(1000);
}
void PublishData(float dist)
{ mqttconnect();
String payload =
"{\"Distance\": "; payload
+= dist;
payload += ", \"ALERT!!\": \"\" \"Distance less than
100cms\""; payload += "}";
Serial.print("Sending payload: ");
Serial.println(payload);
}
}

```

```

if (client.publish(publishTopic, (char*) payload.c_str())) {
    Serial.println("Publish ok");
} else {
    Serial.println("Publish failed");
}
}

void
mqttconnect()
{ if
(!client.conne
ted())
{ Serial.print("Reconnecting client to ");
Serial.println(server);
while (!client.connect(clientId, authMethod, token)) {
Serial.pri
nt(".");
delay(50
0);
}initManagedDevice();
Serial.println();

}
}

void wificonnect()
{
Serial.println();
Serial.print("Connecting to ");
WiFi.begin("Wokwi-GUEST",
"", 6);
while (WiFi.status() != WL_CONNECTED)
{ delay(500);
Serial.print(".");
}
Serial.println("");
Serial.println("WiFi
connected");
Serial.println("IP address:
");
Serial.println(WiFi.localIP
());
}

void initManagedDevice() {
if (client.subscribe(subscribetopic))
{ Serial.println((subscribetopic));
Serial.println("subscribe to cmd OK");
} else {


```

```

Serial.println("subscribe to cmd FAILED");
}
}
void callback(char* subscribetopic, byte* payload, unsigned int payloadLength)
{
Serial.print("callback invoked for topic: ");
Serial.println(subscribetopic);
for (int i = 0; i < payloadLength; i++) {
//Serial.print((char)payload[i]); data3 +=
(char)payload[i];
}
Serial.println("data: "+
data3); data3="";
}

```

SCHEMATIC/CIRCUIT DIAGRAM:

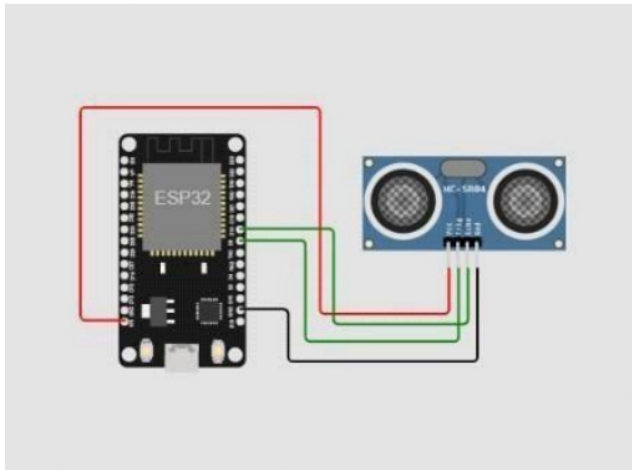

IBM CLOUD OUTPUT:

