

ELEV.

D-075M.DWG



中鼎工程股份有限公司
俊鼎機械廠股份有限公司

DETAIL OF PIPE SUPPORT

TYPE-62

(1 OF 2)

ENGINEERING STANDARD

STM-05.01

D-75

REV.
1A


BY

CHK.

DATE

APPR.

PORTION	TYPE	ACCESSORY M-NO.	REF. TO ITT GRINNELL FIG. NO.	PIPE SIZE RANGE	MAX. TEMP. (°C)	MAX. INSU. THICK (IN.)	REMARKS
UP	FIG.-A	M-31	60				
	FIG.-C	M-28	66		399		
	FIG.-D	M-28	66		399		
LOW	FIG.-P	M-24	299	4" ~ 12"	399		
	FIG.-Q	M-24	299	4" ~ 12"	399		

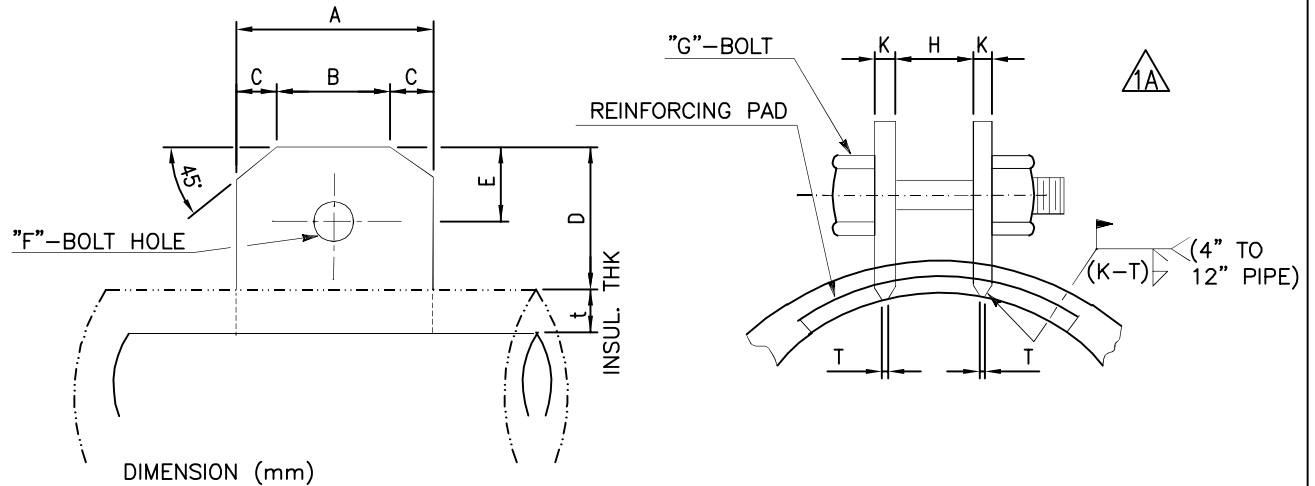

DIMENSION (mm)

TYPE	A	B	C	D	E	F	H	K	T	G
LGP-A-4B	130	70	30	90	30	24	40	9	4	M22 X 90
LGP-A-6B	160	90	35	100	35	28	50	9	4	M24 X 100
LGP-A-8B	160	90	35	100	35	28	50	9	4	M24 X 100
LGP-A-10B	160	90	35	100	35	28	50	9	4	M24 X 100
LGP-A-12B	160	90	35	100	35	28	50	9	4	M24 X 100

DETAIL "Z"

NOTES :

1. DESIGNATION NUMBER DENOTE AS FOLLOWS :

62-4B-M16-05~30D-P(T)

DENOTE TYPE NO.

DENOTE LINE SIZE

DENOTE ROD SIZE

DENOTE WITH TURNBUCKLE

DENOTE LOWER PART "J"

DENOTE UPPER PART "D"

DENOTE DIMENSION "H" (IN 100mm)

2. FOR WELDING SIZE, SEE M-28.

3. TURNBUCKLE SHALL BE USED IN ONE OF THE FOLLOWING CASES:

(a) DIM. "H" LARGER THAN 2000MM.

(b) THE UPPER PART FIG. -D IS IN HANGER COMBINATION.

4. IF FIG.-D IS CHOSEN COMBINATION WITHOUT TURNBUCKLE , A LEFT-HAND
-
- THREADED WELDLESS EYE NUT SHALL BE USED.

5. NON-ASBESTOR GASKET IS USED FOR NOT WELDABLE PIPE, GALV., LINED LINE
-
- OR STAINLESS STEEL LINE. (LINE TEMP.: 205°C, AND SHORT TERM LINE TEMP.:370°C.)

D-076M.DWG

中鼎工程股份有限公司
俊鼎機械廠股份有限公司

DETAIL OF PIPE SUPPORT

TYPE-62

(2 OF 2)

ENGINEERING STANDARD

STM-05.01

BY

CHK.

DATE

APPR.

D-76

REV.
1A