


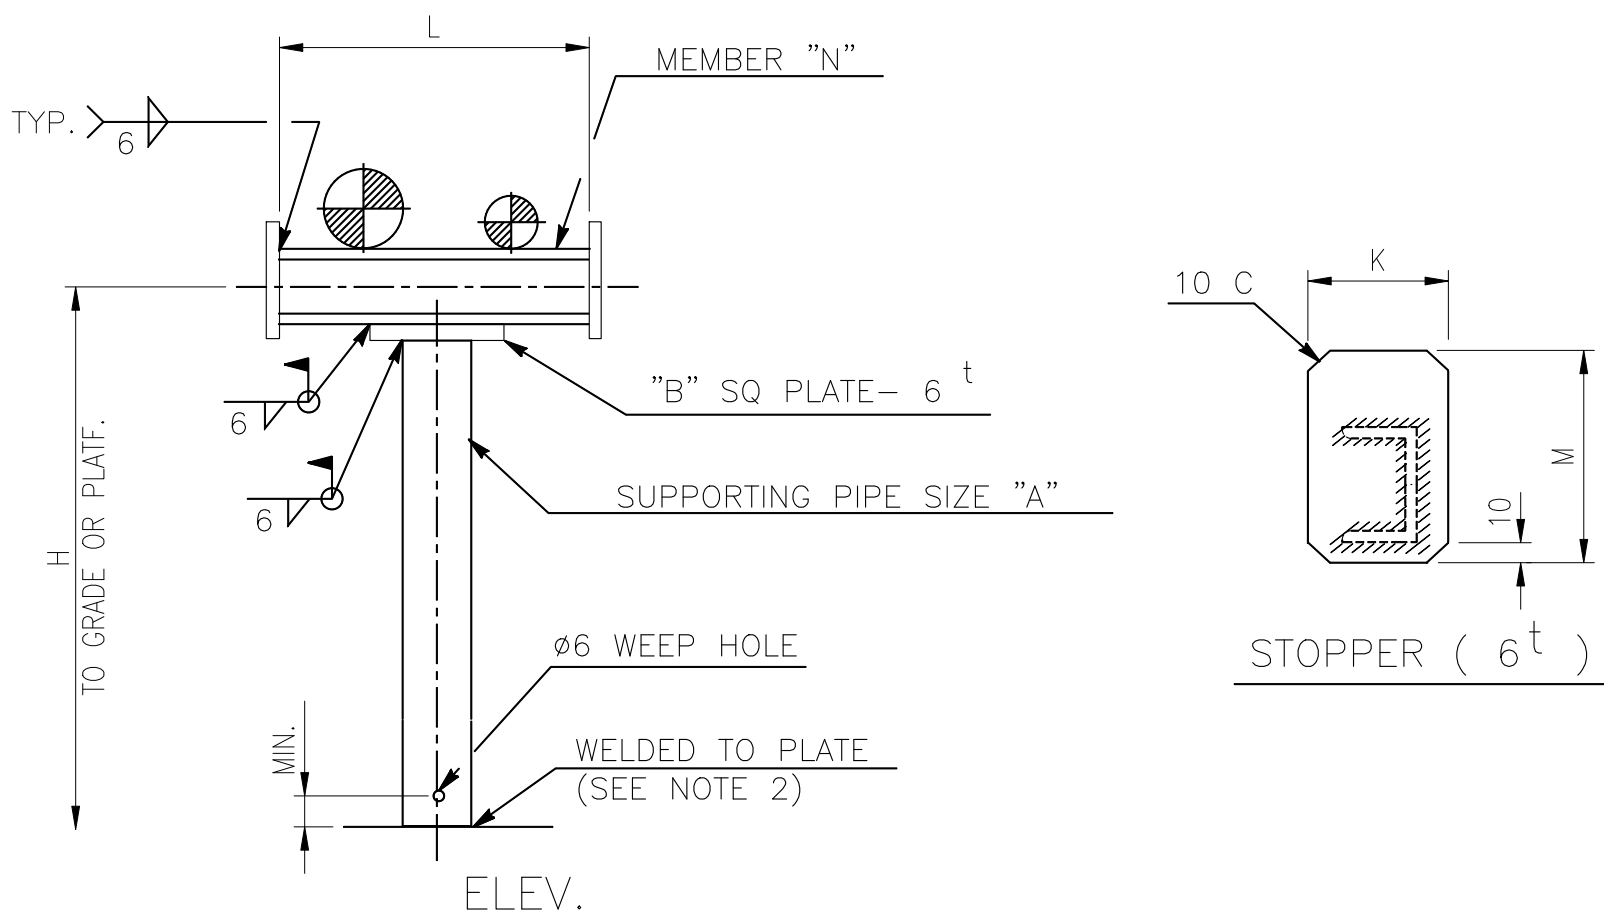

DIMENSIONS (mm)

PIPE SIZE "A"	L (MAX.)	H (MAX.)	K	M	B	MEMBER "N"
2"SCH.40	1000	1500	70	160	80	C100X50X5
3"SCH.40	1000	1500	70	160	110	C100X50X5
4"SCH.40	1000	1500	85	185	135	C125X65X6

NOTES:

1. DIMENSION "H" & "L" SHALL BE CUT TO SUIT IN FIELD.
2. THIS TYPE SHALL BE USED WITH M-42 TO DETERMINE THE LOWER COMPONENT TYPE. IN THIS DETAIL, USE TYPE-G & J ONLY.
3. DESIGNATION NUMBER DENOTE AS FOLLOWS:

08-2B-1005G

08 DENOTE THE LOWER COMPONENT TYPE SEE M-42

2 DENOTE DIMENSION "H" (IN 100mm) (SEE NOTE 4)

B DENOTE DIMENSION "L" (IN 100 mm)

10 DENOTE SUPPORTING PIPE SIZE "A"

G DENOTE TYPE NO.
4. IF THE LOWER COMPONENT TYPE-G IS USED. DIMENSION "H" SHALL BE COUNTED FROM THE ELEVATION OF THE LOWEST POINT OF PAVING.

FILE: D-8M.DWG

中威工程顧問股份有限公司 CHUNG WEI ENGINEERING CONSULTING CO., LTD.						ENGINEERING STANDARD	
						HP6-DSD-A4-500-001	
BY	SHIH		CHK.	YANG		D-8	
DATE	7/15/'24		APPR.	CHEN			
DETAIL OF PIPE SUPPORT TYPE-08						REV. 1	