


DIMENSIONS (mm)										
公稱管徑	管外徑	螺栓直徑	螺栓腳長	跨距	牙長	I-Rod高度	I-Rod長度	鑽孔直徑	I-Rod尺寸	螺帽扭矩
Nom.Pipe Size	D(mm)	d1	L(mm)	P(mm)	A(mm)	I(mm)	F(mm)	G	H(mm)	N-m
1/2"	21.3	1/4"	65	31.0	33	11.1	63.5	3/8"	1"	4.07
3/4"	26.7	1/4"	71	36.0	33	11.1	76.2	3/8"	1"	4.07
1"	33.4	3/8"	75	45.0	40	11.1	76.2	1/2"	1"	9.49
1 1/4"	42.2	3/8"	92	54.0	40	11.1	88.9	1/2"	1"	9.49
1 1/2"	48.3	3/8"	97	61.0	40	11.1	101.6	1/2"	1"	9.49
2"	60.3	3/8"	110	71.0	40	11.1	114.3	1/2"	1"	9.49
2 1/2"	73.0	1/2"	122	94.0	40	11.1	127.0	5/8"	1"	20.34
3"	88.9	1/2"	138	106.0	50	11.1	152.4	5/8"	1"	20.34
4"	114.3	1/2"	170	130.0	60	11.1	177.8	5/8"	1"	20.34
5"	141.3	1/2"	191	156.0	60	11.1	203.2	5/8"	1"	20.34
6"	168.3	1/2"	233	183.0	65	11.1	228.6	5/8"	1"	20.34
8"	219.1	1/2"	290	236.0	90	11.1	279.4	5/8"	1"	20.34
10"	273.1	1/2"	339	306.0	95	17.5	342.9	5/8"	1.5"	20.34
12"	323.9	1/2"	378	340.0	95	17.5	406.4	5/8"	1.5"	20.34

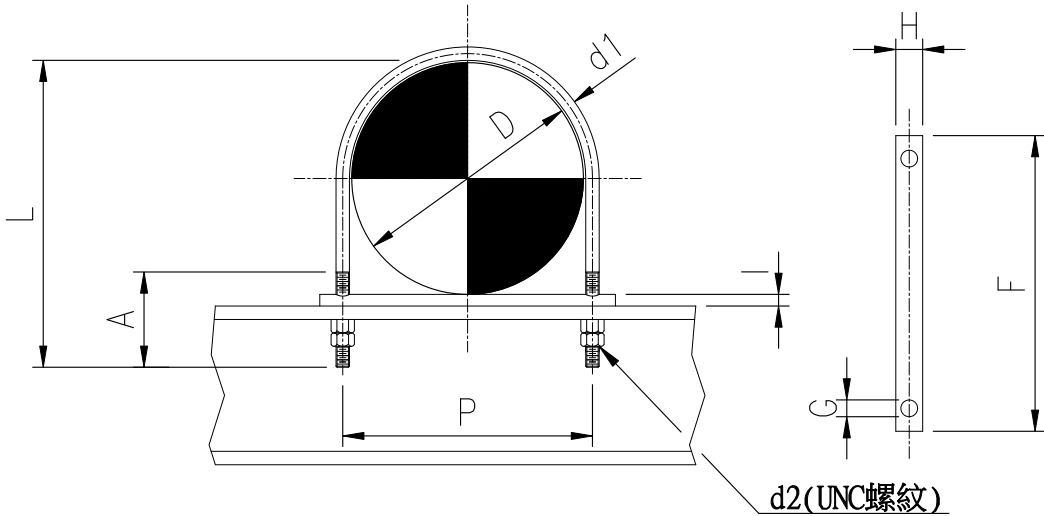

NOTES :

- 1.I-Rod 單點最大負荷:1" 8000LB(3632kg) , 1.5" 10000LB(4540kg)
- 2.I-Rod 可多支並排, 最多三支, 平均分擔負荷
- 3.I-Rod 材質適用最高溫度 Regular:83℃ , High Temp.:171℃ , PEEK:249℃
- 4.I-Rod 材質:熱塑性塑膠(Theroplastic)
- 5.DESIGNATION NUMBER DENOTE AS FOLLOWS:

125-8B
DENOTE TYPE NO. DENOTE LINE SIZE

FILE: D-134M.DWG

中威工程顧問股份有限公司 CHUNG WEI ENGINEERING CONSULTING CO., LTD.						ENGINEERING STANDARD	
						HP6-DSD-A4-500-001	
BY	SHIH		CHK.	YANG		D-135	REV.
DATE	7/15/'24		APPR.	CHEN			1

DETAIL OF PIPE SUPPORT
TYPE-125
(1 OF 1)