


DIMENSIONS											
公稱管徑	管外徑	I-Rod 長度		I-Rod 呎吋		I-Rod 高度		橫樑墊置最大間距 (M)			
Nom.Pipe Size	(mm)	L(inch)	L(mm)	C(inch)	C(mm)	D(inch)	D(mm)	Std	Sch.40	XS	Sch.80
1/2"	21.3	2"	50.8	1"	25.4	7/16"	11.1	----	----	----	----
3/4"	26.7	2.5"	63.5	1"	25.4	7/16"	11.1	----	----	----	----
1"	33.4	3"	76.2	1"	25.4	7/16"	11.1	----	----	----	----
1 1/4"	42.2	3.5"	88.9	1"	25.4	7/16"	11.1	----	----	----	----
1 1/2"	48.3	3/8"	101.6	1"	25.4	7/16"	11.1	----	----	----	----
2"	60.3	3/8"	114.3	1"	25.4	7/16"	11.1	406	406	348	348
2 1/2"	73.0	1/2"	127.0	1"	25.4	7/16"	11.1	----	----	----	----
3"	88.9	1/2"	152.4	1"	25.4	7/16"	11.1	202	202	174	174
4"	114.3	1/2"	177.8	1"	25.4	7/16"	11.1	135	135	110	110
5"	141.3	1/2"	203.2	1"	25.4	7/16"	11.1	----	----	----	----
6"	168.3	1/2"	228.6	1"	25.4	7/16"	11.1	73	71	55	55
8"	219.1	1/2"	279.4	1"	25.4	7/16"	11.1	47	45	35	35
10"	273.1	1/2"	342.9	1.1/2"	38.1	11/16"	17.5	39	38	32	29
12"	323.9	1/2"	406.4	1.1/2"	38.1	11/16"	17.5	29	27	24	21

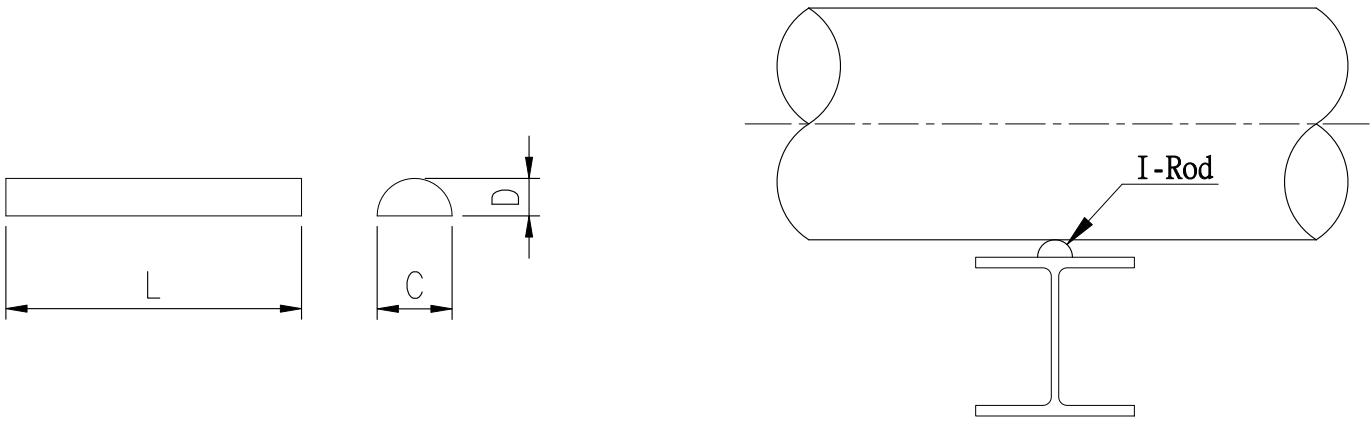

- NOTES :
- 1.I-Rod 單點最大負荷:1" 8000LB(3632kg) , 1.5" 10000LB(4540kg)
 - 2.I-Rod 可多支並排, 最多三支, 平均分擔負荷。
 - 3.I-Rod 材質適用最高溫度 Regular:83℃ , High Temp.:171℃ , PEEK:249℃
 - 4.I-Rod 材質:熱塑性塑膠(Theroplastic)
 - 5.可用3M雙面膠或原廠I-Rod專用黏膠將I-Rod黏置於橫樑上。
 - 6.本表依據單支I-Rod的最大荷重與飽水管重量計算, I-Rod橫樑墊置實際設計間距, 不可超過本表的最大間距, 以免超過I-Rod的最大荷重。
 - 7.DESIGNATION NUMBER DENOTE AS FOLLOWS:
126-8B
DENOTE TYPE NO. ———— DENOTE LINE SIZE

中威工程顧問股份有限公司 CHUNG WEI ENGINEERING CONSULTING CO., LTD.						ENGINEERING STANDARD	
DETAIL OF PIPE SUPPORT TYPE-126 (1 OF 1)						HP6-DSD-A4-500-001	
						D-136	REV. 1
BY	SHIH		CHK.	YANG			
DATE	7/15/'24		APPR.	CHEN			

FILE: D-134M.DWG