


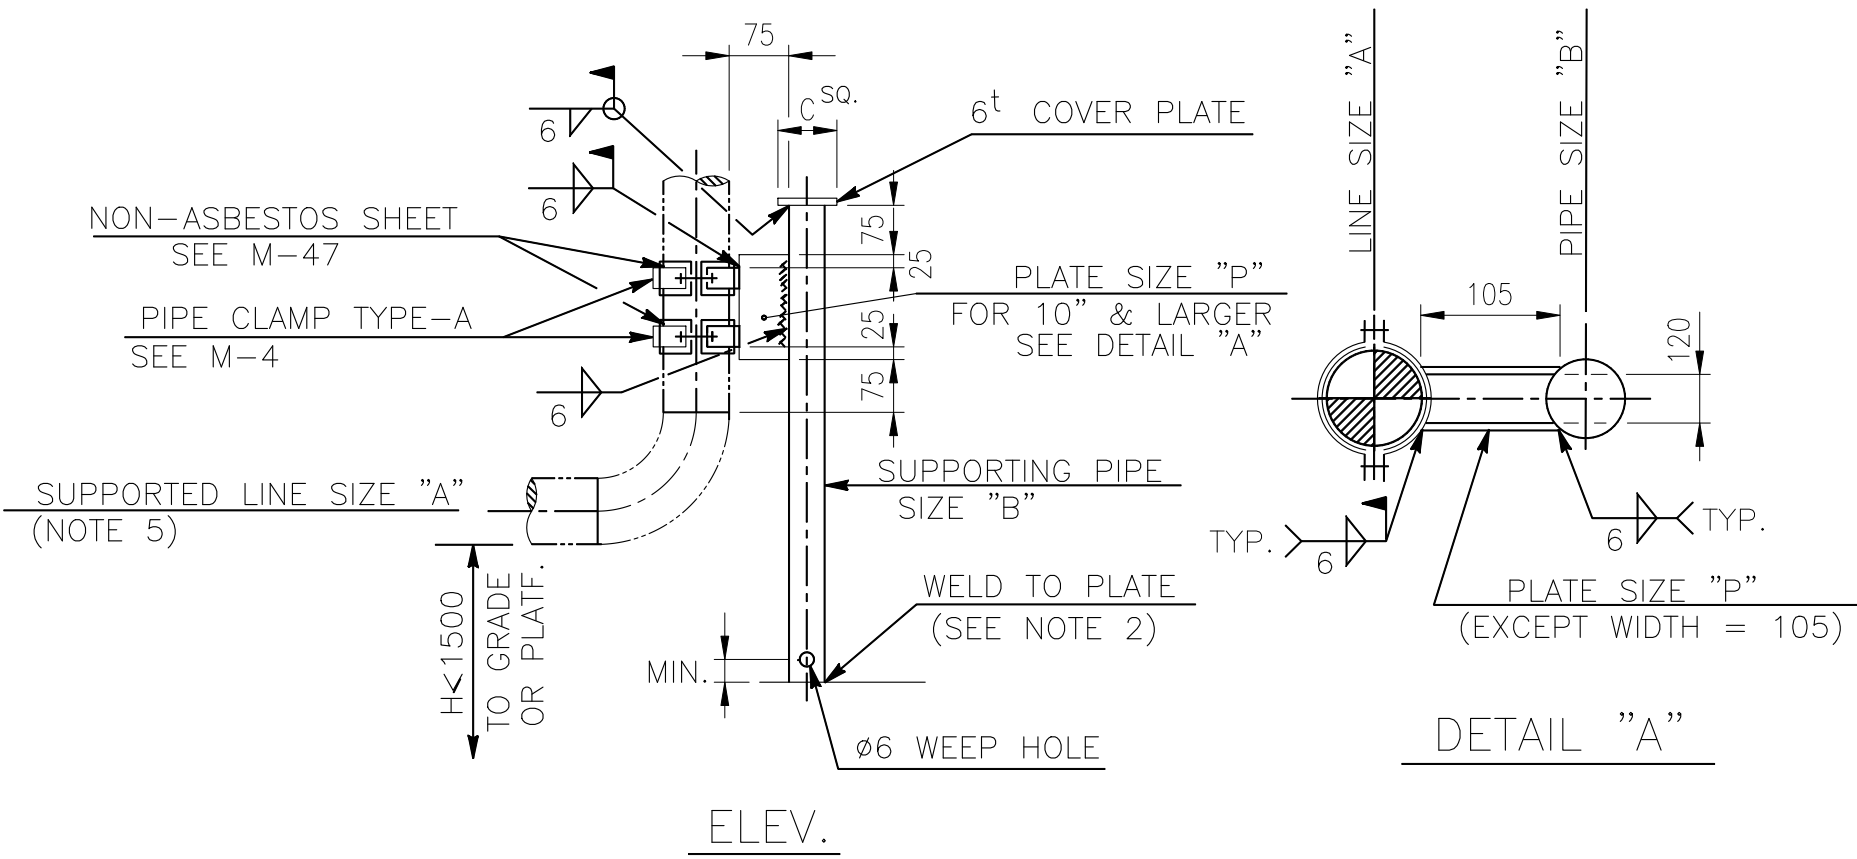

DIMENSION (mm)			
A	B	C	P
2"	1 1/2" SCH.80	70	150X75X9
3"	2" SCH.40	80	150X75X9
4"	3" SCH.40	110	150X75X9
6"	4" SCH.40	140	150X75X9
8"	6" SCH.40	190	250X75X12
10"	8" SCH.40	240	250X105X12
12"	8" SCH.40	240	350X105X12
14"	10" SCH.40	290	350X105X12
16"	10" SCH.40	290	350X105X12

NOTES:

1. THIS TYPE IS USUALLY USED FOR ALLOY STEEL AND STAINLESS STEEL LINES.
2. THIS TYPE SHALL BE USED WITH M-42 TO DETERMINE THE LOWER COMPONENT TYPE.
3. DESIGNATION NUMBER DENOTE AS FOLLOWS:

13-6B-05B

DENOTE THE LOWER COMPONENT TYPE, SEE M-42

DENOTE DIMENSION "H" (IN 100 mm)

DENOTE SUPPORTED LINE SIZE "A"

DENOTE TYPE NO.
4. DIMENSION SHALL BE CUT TO SUIT IN FIELD.
5. MAX. LINE TEMP. : 750°F
6. IF ONE OF LOWER COMPONENT TYPE-A,B,E,G IS USED, DIMENSION "H" SHALL BE COUNTED FROM THE ELEVATION OF THE LOWEST POINT OF PAVING.

中威工程顧問股份有限公司 CHUNG WEI ENGINEERING CONSULTING CO., LTD.						ENGINEERING STANDARD	
						HP6-DSD-A4-500-001	
BY	SHIH		CHK.	YANG		D-13	REV.
DATE	7/15/'24		APPR.	CHEN			1

FILE: D-13M.DWG