Real-Time River Water Quality Monitoring and Control Systems Assignment - 4

Question-1:

Write a code and connections in wokwi for the ultrasonic sensor. Whenever the distance is less than 100cms send an "Alert" to IBM cloud and display in the device recent events.


Code:

```
#include <WiFi.h>
#include <PubSubClient.h>
void callback(char* subscribetopic, byte* payload, unsigned int
payloadLength);
#define ORG "uwujz1"
//IBM ORGANITION ID
#define DEVICE_TYPE "esp"//Device type mentioned in ibm watson IOT Platform
#define DEVICE ID "12345"//Device ID mentioned in ibm watson IOT Platform
#define TOKEN "asdfghjkl" //Token
String data3;
char server[] = ORG ".messaging.internetofthings.ibmcloud.com";
char publishTopic[] = "iot-2/evt/Data/fmt/json";
char subscribetopic[] = "iot-2/cmd/test/fmt/String";
char authMethod[] = "use-token-auth";
char token[] = TOKEN;
char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID;
WiFiClient wifiClient;
PubSubClient client(server, 1883, callback ,wifiClient);
const int trigPin = 5;
const int echoPin = 18;
#define SOUND_SPEED 0.034
long duration;
float distance;
void setup() {
Serial.begin(115200);
pinMode(trigPin, OUTPUT);
pinMode(echoPin, INPUT);
wificonnect();
```


```
mqttconnect();
void loop()
digitalWrite(trigPin, LOW);
delayMicroseconds(2);
digitalWrite(trigPin, HIGH);
delayMicroseconds(10);
digitalWrite(trigPin, LOW);
duration = pulseIn(echoPin, HIGH);
distance = duration * SOUND_SPEED/2;
Serial.print("Distance (cm): ");
Serial.println(distance);
if(distance<100)</pre>
Serial.println("ALERT!!");
delay(1000);
PublishData(distance);
delay(1000);
if (!client.loop()) {
mqttconnect();
delay(1000);
void PublishData(float dist) {
mqttconnect();
String payload = "{\"Distance\":";
payload += dist;
payload += ",\"ALERT!!\":""\"Distance less than 100cms\"";
payload += "}";
Serial.print("Sending payload: ");
Serial.println(payload);
if (client.publish(publishTopic, (char*) payload.c str())) {
Serial.println("Publish ok");
} else {
Serial.println("Publish failed");
void mqttconnect() {
if (!client.connected()) {
Serial.print("Reconnecting client to ");
Serial.println(server);
while (!!!client.connect(clientId, authMethod, token)) {
Serial.print(".");
```

```
delay(500);
initManagedDevice();
Serial.println();
void wificonnect()
Serial.println();
Serial.print("Connecting to ");
WiFi.begin("Wokwi-GUEST", "", 6);
while (WiFi.status() != WL_CONNECTED) {
delay(500);
Serial.print(".");
Serial.println("");
Serial.println("WiFi connected");
Serial.println("IP address: ");
Serial.println(WiFi.localIP());
void initManagedDevice() {
if (client.subscribe(subscribetopic)) {
Serial.println((subscribetopic));
Serial.println("subscribe to cmd OK");
} else {
Serial.println("subscribe to cmd FAILED");
void callback(char* subscribetopic, byte* payload, unsigned int payloadLength)
Serial.print("callback invoked for topic: ");
Serial.println(subscribetopic);
for (int i = 0; i < payloadLength; i++) {</pre>
//Serial.print((char)payload[i]);
data3 += (char)payload[i];
Serial.println("data: "+ data3);
data3="";
```

Circuit Diagram:

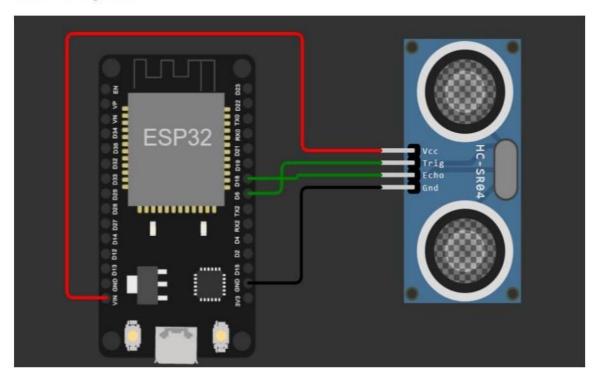

IBM Cloud Output:

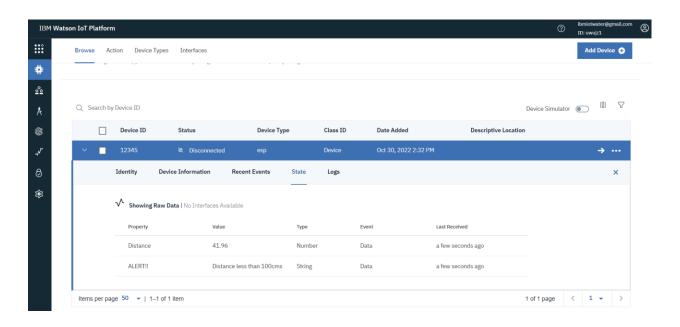

Tressage	rimostamp
Closed connection. The client ID was reused.	Oct 30, 2022 2:45 PM
Closed connection. The client ID was reused.	Oct 30, 2022 2:45 PM
Token auth succeeded: ClientID='d:uwujz1:esp:	Oct 30, 2022 2:45 PM
Token auth succeeded: ClientID='d:uwujz1:esp:	Oct 30, 2022 2:45 PM
Closed connection. The connection timed out	Oct 30, 2022 2:43 PM
Token auth succeeded: ClientID='d:uwujz1:esp:	Oct 30, 2022 2:42 PM
Token auth succeeded: ClientID='d:uwujz1:esp:	Oct 30, 2022 2:41 PM

Timestamp

Output:

Message

```
Connecting to ...
WiFi connected
IP address:
10.10.0.2
Reconnecting client to uwujz1.messaging.internetofthings.ibmcloud.com
iot-2/cmd/test/fmt/String
subscribe to cmd OK
Distance (cm): 41.97
ALERT!!
Sending payload: {"Distance":41.97, "ALERT!!": "Distance less than 100cms"}
Publish ok
Distance (cm): 41.96
ALERT!!
Sending payload: {"Distance":41.96, "ALERT!!": "Distance less than 100cms"}
Publish ok
Distance (cm): 41.96
ALERT!!
Sending payload: {"Distance":41.96, "ALERT!!": "Distance less than 100cms"}
Publish ok
Distance (cm): 41.96
ALERT!!
```