


DIMENSION (mm)

MEMBER "M"	H (MAX.)	$\theta = 30^\circ$			$\theta = 45^\circ$		
		B	S	N	B	S	N
L75X75X9	950	135	0.577H-8	1.155H+92	115	H - 30	1.414H+57
C100X50X5	950	145	0.577H-7	1.155H+100	120	H - 31	1.414H+55
C125X65X6	1750	145	0.577H+4	1.155H+114	130	H - 33	1.414H+41
C150X75X9	1750	165	0.577H+3	1.155H+125	140	H - 36	1.414H+47
C180X75X7	1750	185	0.577H+7	1.155H+145	150	H - 32	1.414H+60
C200X90X8	1750	195	0.577H+9	1.155H+155	160	H - 36	1.414H+56

LINE SIZE "N"	2"	3"	4"	6"	8"	10"	12"	14"	16"	18"	20"	24"
TRUNNION SIZE "P"	1 1/2"	2"	2"	3"	4"	6"	8"	10"	10"	12"	12"	14"
Q (mm)	85	100	113	140	165	195	215	230	255	280	305	355

NOTES:

1. DESIGNATION NUMBER DENOTE AS FOLLOWS :

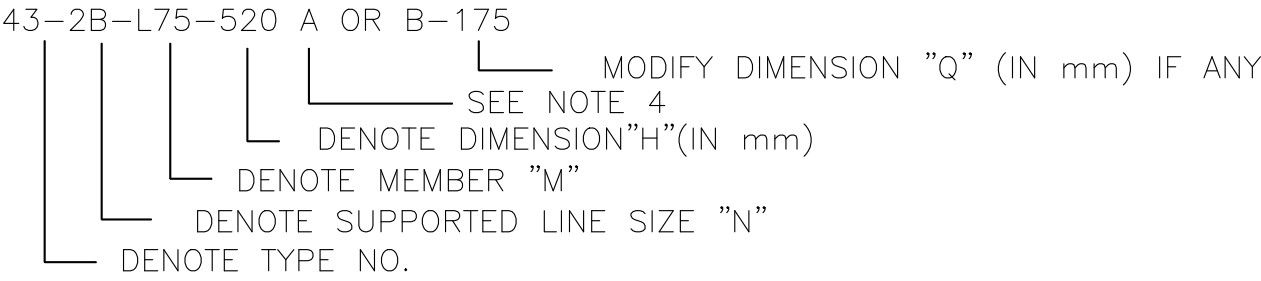

2. THE TRUNNION SIZE MUST BE CHECKED BY SH'T D-72,73 & 74.

3. WHERE $H=K-\sqrt{R^2-Q^2}-t-E-30$

4. A: FOR $\theta = 30^\circ$, B: FOR $\theta = 45^\circ$

FILE: D-52M.DWG

中威工程顧問股份有限公司 CHUNG WEI ENGINEERING CONSULTING CO., LTD.						ENGINEERING STANDARD	
						HP6-DSD-A4-500-001	
BY	SHIH		CHK.	YANG		DETAIL OF PIPE SUPPORT TYPE-43 (2 OF 2)	REV. 1
DATE	7/15/'24		APPR.	CHEN			