



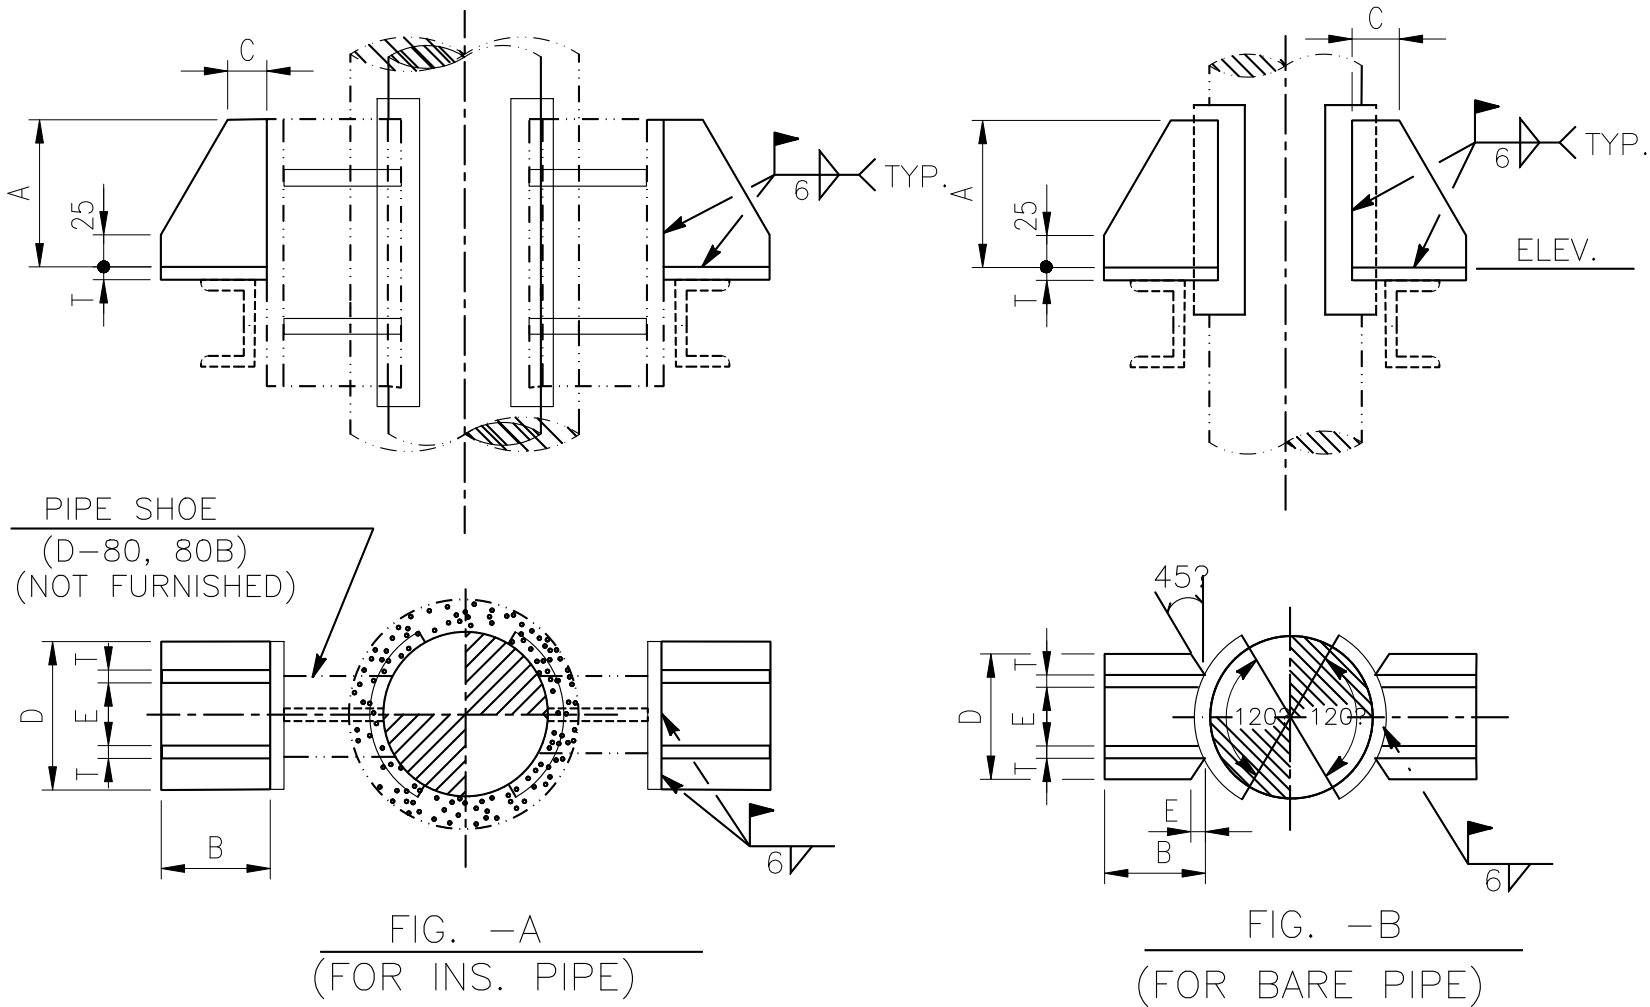

SUPPORT NO.	LINE SIZE	A	B	C	D	E	F	T
60-16B-A	16"	200	120	60	280	200	-	12
60-18B-A	18"	200	120	60	300	220	-	12
60-20B-A	20"	200	120	60	340	240	-	12
60-24B-A	24"	250	150	75	400	300	-	12
60-26B-A	26"	250	150	75	430	330	-	12
60-28B-A	28"	250	150	75	460	360	-	12
60-30B-A	30"	250	150	75	480	380	-	12
60-32B-A	32"	250	150	75	540	440	-	16
60-36B-A	36"	250	150	75	580	460	-	16
60-40B-A	40"	250	150	75	620	500	-	16
60-42B-A	42"	250	150	75	660	540	-	16
60-16B-B	16"	200	150	75	240	160	20	12
60-18B-B	18"	200	150	75	260	180	20	12
60-20B-B	20"	200	150	75	260	180	20	12
60-24B-B	24"	250	170	85	280	200	20	12
60-26B-B	26"	250	170	85	280	200	20	12
60-28B-B	28"	250	170	85	280	200	20	12
60-30B-B	30"	250	170	85	280	200	15	12
60-32B-B	32"	250	170	85	280	200	15	16
60-36B-B	36"	250	170	85	340	260	20	16
60-40B-B	40"	250	180	90	380	300	25	16
60-42B-B	42"	250	180	90	380	300	25	16

NOTES :

1. DESIGNATION NUMBER DENOTE AS FOLLOWS :

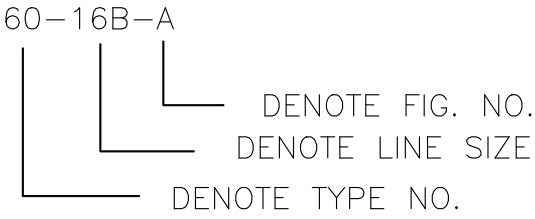

2. MATERIAL : A283 GR. C

中威工程顧問股份有限公司 CHUNG WEI ENGINEERING CONSULTING CO., LTD.						ENGINEERING STANDARD	
						HP6-DSD-A4-500-001	
BY	SHIH		CHK.	YANG		D-71	REV.
DATE	7/15/'24		APPR.	CHEN			1