


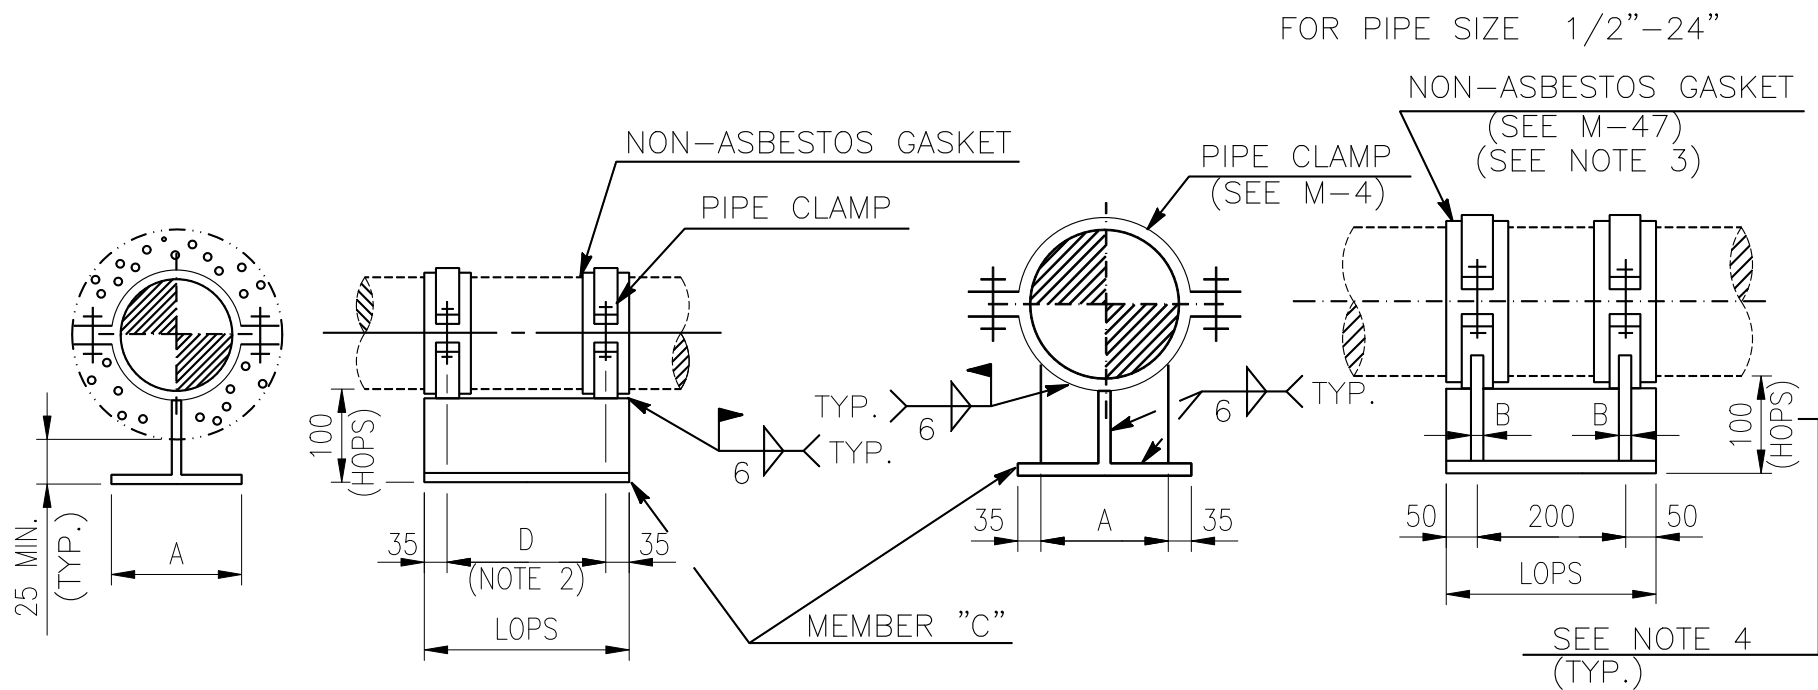


(8" & SMALLER) (10" TO 24" PIPE)

ELEV.

DIMENSIONS (mm)

LINE SIZE	A	B	C	PIPE CLAMP TYPE	D (2)
1/2"	100	—	CUT FROM H200X100X5.5X8	PCL-A-1/2B	80
3/4"	100	—		PCL-A-3/4B	80
1"	100	—		PCL-A- 1B	80
1 1/2"	100	—		PCL-A-1 1/2B	80
2"	100	—		PCL-A- 2B	80
2 1/2"	100	—		PCL-A-2 1/2B	80
3"	100	—		PCL-A- 3B	180
4"	100	—		PCL-A- 4B	180
5"	100	—		PCL-A- 5B	180
6"	100	—		PCL-A- 6B	180
8"	100	—		PCL-A- 8B	180
10"	130	9	CUT FROM H200X200X8X12	PCL-A- 10B	—
12"	130	9		PCL-A- 12B	—
14"	130	9		PCL-A- 14B	—
16"	250	12	FAB. FROM 12 ^t PLATE	PCL-A- 16B	—
18"	250	12		PCL-A- 18B	—
20"	250	12		PCL-A- 20B	—
24"	300	12		PCL-A- 24B	—

NOTES :

1. DESIGNATION NUMBER DENOTE AS FOLLOWS :
67-3/4B-A-130-500
- DENOTE TYPE NO.    MODIFY LOPS=500 (IN mm) IF ANY
- DENOTE LINE SIZE   MODIFY HOPS=130 (IN mm) IF ANY
- SEE NOTE 4
2. LONGITUDINAL LENGTH OF PIPE SHOE (SAY LOPS) SHALL BE CALCULATED IN CASE WITH PIPE STOP.
3. THIS TYPE IS USUALLY USED FOR ALLOY STEEL AND STAINLESS STEEL LINES.(LINE MAX. TEMP. : 750°F)
4. REF. SH'T D-80A TABLE "A"
5. HOPS=HEIGHT OF PIPE SHOE, LOPS=LENGTH OF PIPE SHOE.

FILE: D-81M.DWG

中威工程顧問股份有限公司 CHUNG WEI ENGINEERING CONSULTING CO., LTD.						ENGINEERING STANDARD	
						HP6-DSD-A4-500-001	
BY	SHIH		CHK.	YANG		D-81	
DATE	7/15/'24		APPR.	CHEN			
DETAIL OF PIPE SUPPORT TYPE-67						REV. 1	
						(1 OF 2)	