

## Assignment 4

<b>Name</b>	KUMARAGURUBARAN R
<b>Team ID</b>	PNT2022TMID15739
<b>Project Name</b>	SMART CROP PROTECTION SYSTEM FOR AGRICULTURE

1. Write Code and connections in wokwi for ultrasonic sensor. whatever distance is less than 100 cms send "Alert" to ibm cloud aand display in device recent events.

```
#include <WiFi.h>
#include <PubSubClient.h>
WiFiClient wifiClient;
String data3;
#define ORG "3yngbh"
#define DEVICE_TYPE "Assignment"
#define DEVICE_ID "1234"
#define TOKEN "234567890"
#define speed 0.034
#define led 14
char server[] = ORG ".messaging.internetofthings.ibmcloud.com";
char publishTopic[] = "iot-2/evt/shreedharen/fmt/json";
char topic[] = "iot-2/cmd/led/fmt/String";
char authMethod[] = "use-token-auth";
char token[] = TOKEN;
char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID;
PubSubClient client(server, 1883, wifiClient);
```

```
const int trigpin=5;
const int echopin=18;
String command;
String data="";
```

```
long duration;
float dist;
```

```
void setup()
{
```

```

    Serial.begin(115200);
    pinMode(led, OUTPUT);
    pinMode(trigpin, OUTPUT);
    pinMode(echopin, INPUT);
    wifiConnect();
    mqttConnect();
}

void loop() {
    bool isNearby = dist < 100;
    digitalWrite(led, isNearby);

    publishData();
    delay(500);

    if (!client.loop()) {
        mqttConnect();
    }
}

void wifiConnect() {
    Serial.print("Connecting to "); Serial.print("Wifi");
    WiFi.begin("Wokwi-GUEST", "", 6);
    while (WiFi.status() != WL_CONNECTED) {
        delay(500);
        Serial.print(".");
    }
    Serial.print("WiFi connected, IP address: ");
    Serial.println(WiFi.localIP());
}

void mqttConnect() {
    if (!client.connected()) {
        Serial.print("Reconnecting MQTT client to "); Serial.println(server);
        while (!client.connect(clientId, authMethod, token)) {
            Serial.print(".");
            delay(500);
        }
        initManagedDevice();
        Serial.println();
    }
}

void initManagedDevice() {
    if (client.subscribe(topic)) {
        // Serial.println(client.subscribe(topic));
        Serial.println("IBM subscribe to cmd OK");
    } else {

```

```


        Serial.println("subscribe to cmd FAILED");
    }
}
void publishData()
{
    digitalWrite(trigpin, LOW);
    digitalWrite(trigpin, HIGH);
    delayMicroseconds(10);
    digitalWrite(trigpin, LOW);
    duration=pulseIn(echopin, HIGH);
    dist=duration*speed/2;
    if(dist<100){
        String payload = "{\"Alert Distance\":\"";
        payload += dist;
        payload += "\"}";

        Serial.print("\n");
        Serial.print("Sending payload: ");
        Serial.println(payload);
        if (client.publish(publishTopic, (char*) payload.c_str())) {
            Serial.println("Publish OK");
        }
    }

    if(dist>100){
        String payload = "{\"Distance\":\"";
        payload += dist;
        payload += "\"}";

        Serial.print("\n");
        Serial.print("Sending payload: ");
        Serial.println(payload);
        if(client.publish(publishTopic, (char*) payload.c_str())) {
            Serial.println("Publish OK");
        }else {
            Serial.println("Publish FAILED");
        }
    }
}
}

```

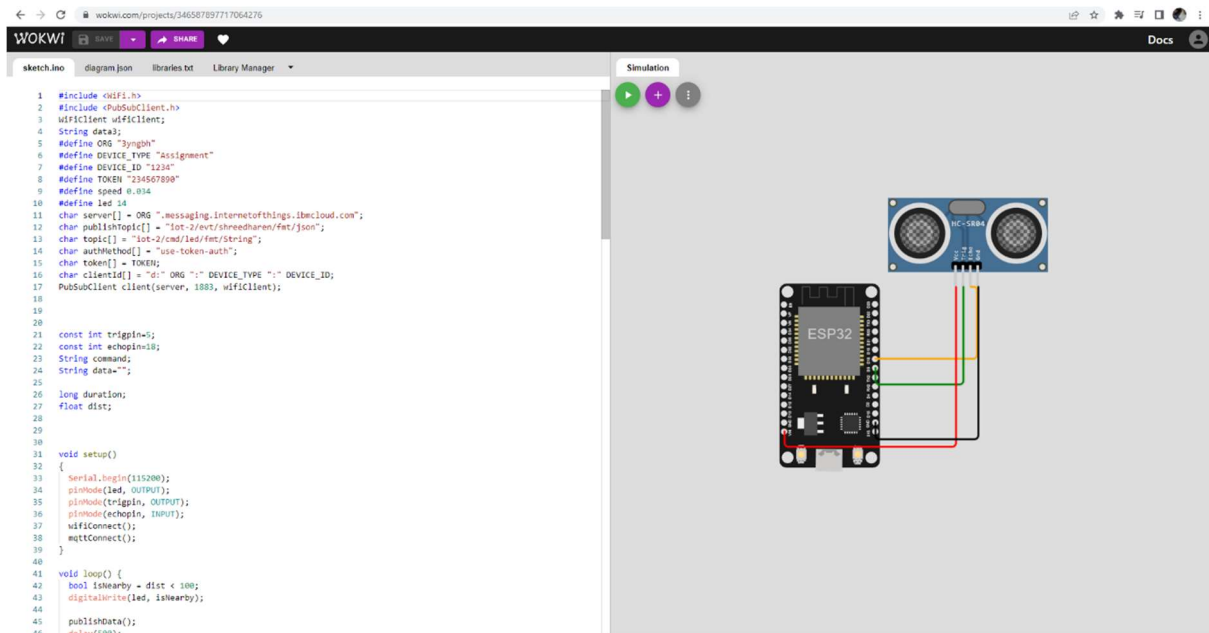

Wokwi link : <https://wokwi.com/projects/346587897717064276>

