


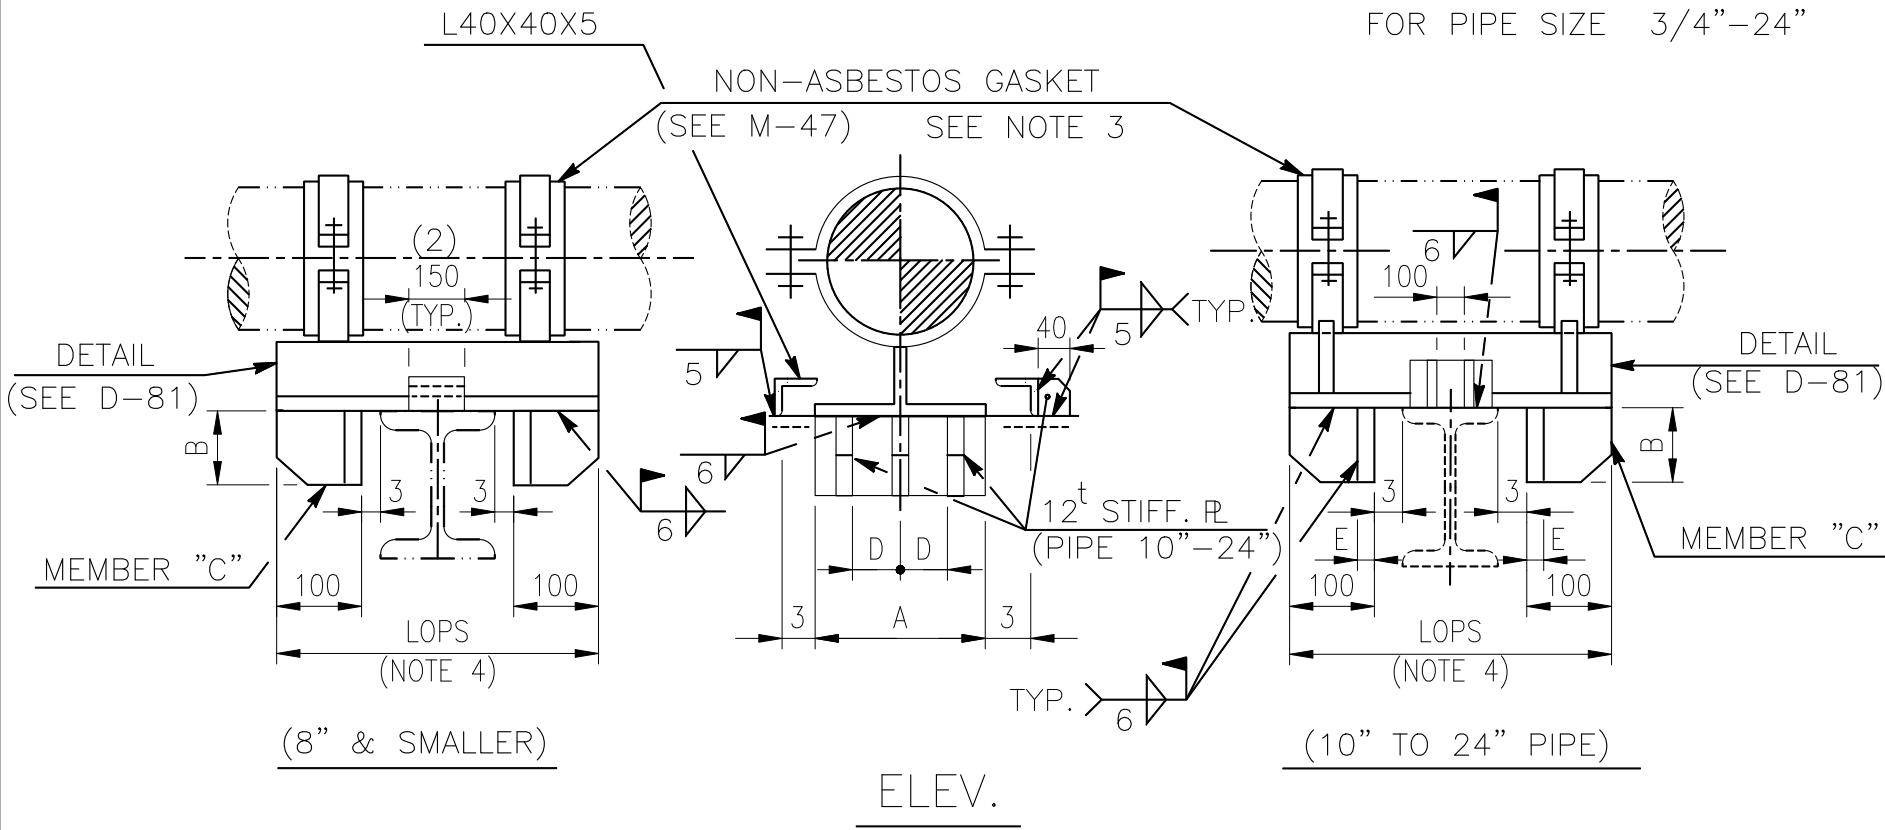

DIMENSIONS (mm)					
LINE SIZE	A	B	C	D	E
3/4"	100	100	CUT FROM H200X100X5.5X8	—	—
1"	100	100		—	—
1 1/2"	100	100		—	—
2"	100	100		—	—
2 1/2"	100	100		—	—
3"	100	100		—	—
4"	100	100		—	—
5"	100	100		—	—
6"	100	100		—	—
8"	100	100		—	—
10"	200	200	CUT FROM H200X200X8X12	70	—
12"	200	200		70	—
14"	200	200		70	—
16"	300	250	FAB. FROM 12 ^t RL	100	12
18"	300	250		100	12
20"	300	250		100	12
24"	350	250		100	12

NOTES :

1. DESIGNATION NUMBER DENOTE AS FOLLOWS :

84-2B-A-130-500
DENOTE TYPE NO. MODIFY LOPS=500 (IN mm) IF ANY
DENOTE LINE SIZE MODIFY HOPS=130 (IN mm) IF ANY
SEE SH'T D-80A TABLE "A"
2. THE MAX. LENGTH OF THIS MEMBER SHALL NOT EXCEED THE WIDTH OF BEAM.
3. THIS TYPE IS USUALLY USED FOR ALLOY STEEL AND STAINLESS STEEL LINES
(MAX. LINE TEMP. : 750°F)
4. PIPE SHOE LENGTH (SAY LOPS) TO SUIT BEAM WIDTH IN FIELD.
5. HOPS=HEIGHT OF PIPE SHOE, LOPS=LENGTH OF PIPE SHOE.

中威工程顧問股份有限公司 CHUNG WEI ENGINEERING CONSULTING CO., LTD.						ENGINEERING STANDARD	
						HP6-DSD-A4-500-001	
DETAIL OF PIPE SUPPORT TYPE-84 (1 OF 2)						D-103	REV. 1