

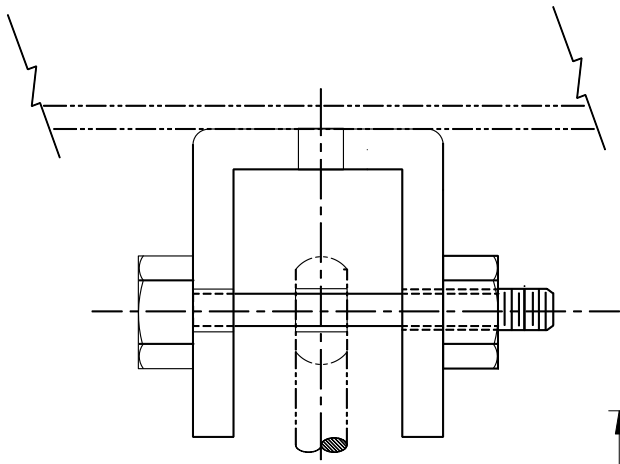


FIG.-1

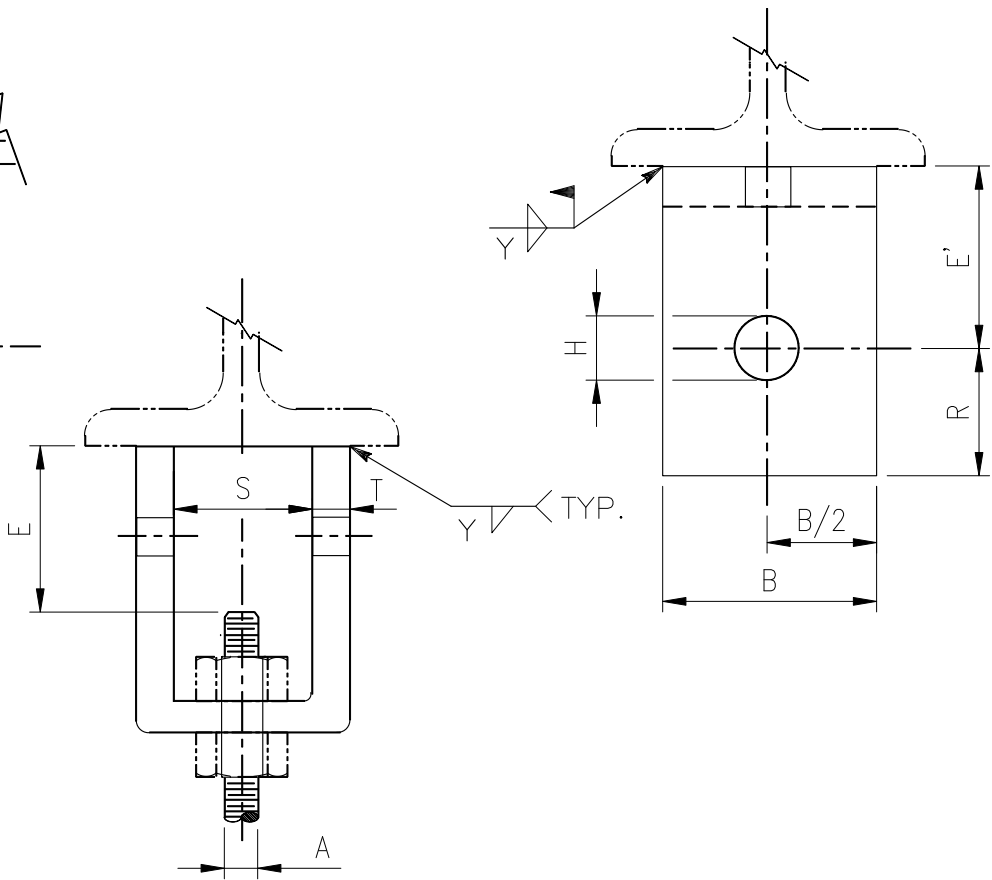


FIG.-2

(FOR 1 3/4" ROD DIA. AND SMALLER ONLY)

DIMENSION (mm)

TYPE	ROD SIZE A	BOLT SIZE	MAX. RECOM. LOAD (Kg)		ROD TAKEOFF		B	H	R	S	T	Y
			650°F	750°F	E	E'						
BA-A-3/8	3/8"	1/2" X 70	270	240	48	51	51	14	22	32	6	6
BA-A-1/2	1/2"	5/8" X 70	510	460	44	51	51	17	22	32	6	6
BA-A-5/8	5/8"	3/4" X 70	820	730	44	51	51	21	22	32	6	6
BA-A-3/4	3/4"	7/8" X 80	1230	1100	44	51	64	24	29	38	9	6
BA-A-7/8	7/8"	1" X 110	1710	1520	67	76	64	29	32	51	9	6
BA-A-1	1"	1 1/8" X 120	2250	2000	70	76	76	32	38	51	12	6
BA-A-1 1/4	1 1/4"	1 3/8" X 130	3630	3240	73	76	102	38	51	64	16	10
BA-A-1 1/2	1 1/2"	1 5/8" X 150	5280	4700	102	102	127	44	64	76	19	10
BA-A-1 3/4	1 3/4"	1 7/8" X 180	7120	6350	127	127	127	51	70	95	19	10
BA-A-2	2"	2 1/4" X 180	9390	8370	133	127	152	60	83	95	19	10
BA-A-2 1/4	2 1/4"	2 1/2" X 190	12430	11000	159	152	152	67	89	108	19	16
BA-A-2 1/2	2 1/2"	2 3/4" X 200	15200	13560	159	152	152	73	95	114	19	16

NOTES :

1. DESIGNATION NUMBER DENOTE AS FOLLOWS :

BA-A1-3/8

└─ DENOTE ROD SIZE

└─ DENOTE FIG.1

└─ DENOTE TYPE-A

└─ DENOTE BEAM ATTACHMENT
2. MATERIAL: CARBON STEEL
3. ROD SIZE 1 1/4" AND LARGER ARE PINS WITH COTTER PINS,
ROD SIZE 1 1/8" AND SMALLER ARE MACHINE BOLTS WITH NUTS.
4. REF. GRINNELL FIG. 66 OR EQ.

FILE: M-28M.DWG

中威工程顧問股份有限公司 CHUNG WEI ENGINEERING CONSULTING CO., LTD.						ENGINEERING STANDARD	
						HP6-DSD-A4-500-001	
BY	SHIH		CHK.	YANG		M-28	
DATE	7/15/'24		APPR.	CHEN			
BEAM ATTACHMENT TYPE-A						REV. 1	